



# Measurement instruments



**MEASURE  
COMPREHENSIVELY**  
CHEAPER IN A SET

By choosing Sonel WME, you gain



Multiple products  
in one suitcase



Set for specific  
applications



Lower price




New

## Sonel PVM-1530 Pro

Set for measurements  
in photovoltaic  
systems

page 45

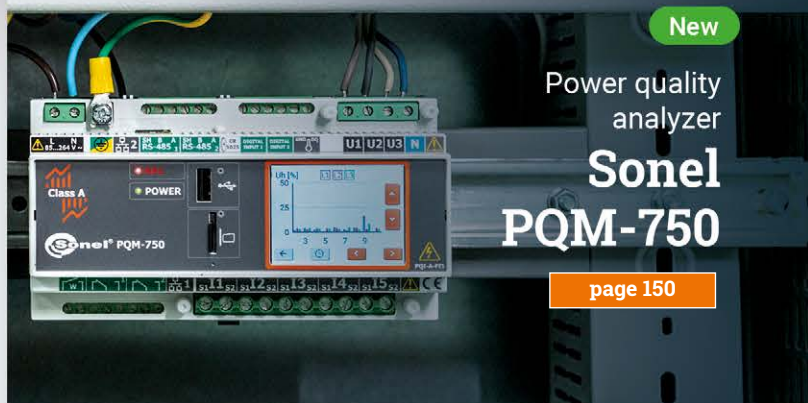

New

Power quality  
analyzer

## Sonel PQM-750

page 150



New

## Sonel EVSE-100

Multifunctional  
analyzer for electric  
vehicle charging  
stations

page 40



Insulation  
resistance meter

## Sonel MIC-2511

New

**NEW FEATURE**  
SPD - Testing surge  
protecting devices

page 66



Cable and underground  
infrastructure locator

## Sonel LKZ-2500

page 134



New

Thermal  
imager

## KT series 500

page 110

New






























High-current fault loop impedance meter

## Sonel MZC-340-PV

page 81



<b>Sonel software</b>	<b>8</b>
<b>Measurement sets</b>	<b>10</b>
	Measurement sets <b>NEW!</b> Sonel WME-9 / 10 / 11 / 12 / 13 / 20 / 21 <b>10</b>
<b>Electrical safety measurements</b>	<b>18</b>
	Multi-function instruments <b>NEW!</b> Sonel EVSE-100 <b>22-42</b>
	Residual current device measurements PV installation measurements <b>NEW!</b> Sonel PVM-1530 Accessories <b>43-56</b>
	Insulation resistance measurements <b>NEW!</b> MIC-RS (RS-485) Accessories <b>57-76</b>
	Fault loop measurements <b>NEW!</b> Sonel MZC-340-PV Accessories <b>77-88</b>
	Earth (ground) measurements <b>NEW!</b> Sonel MRU-12 Accessories <b>89-103</b>
	Sonel Reports Plus software <b>103</b>
<b>Temperature measurements</b>	<b>104</b>
	Thermal imagers, pyrometers <b>NEW!</b> Sonel KT-510 / 520 / 525 / 530 / 550 Accessories <b>108-118</b>
	Sonel ThermoAnalyze software <b>113</b>
<b>High voltage measurements</b>	<b>119</b>
	Partial discharges meters High voltage insulation testers <b>120-124</b>
<b>Low resistance measurements</b>	<b>125</b>
	Low resistance meters Accessories <b>127-131</b>
<b>Location of hidden infrastructure and faults</b>	<b>132</b>
	Cable and underground infrastructure locators Reflectometers Accessories <b>134-142</b>

<b>Illuminance measurements</b>	<b>143</b>
	Illuminance meters Accessories <b>144</b>
<b>Power quality analysis</b>	<b>146</b>
	Power quality analyzers <b>NEW!</b> Sonel PQM-750 Accessories <b>148-160</b>
	Sonel Analysis software <b>162</b>
<b>Safety of electrical equipment</b>	<b>163</b>
	Safety of electrical equipment <b>NEW!</b> Sonel PAT-95 / 96 Accessories <b>165-170</b>
	Sonel PAT Analysis software <b>169</b>
<b>Handheld devices</b>	<b>171</b>
	Clamp meters <b>NEW!</b> Sonel CMP-100 Accessories <b>174-183</b>
	Multimeters Accessories <b>184-190</b>
	Voltage testers <b>191-192</b>
	Distance meter <b>192</b>
	Phase sequence testers <b>193</b>
<b>Other devices</b>	<b>194</b>
	Battery tester <b>NEW!</b> Sonel BT-120 <b>195</b>
	Acoustic imager <b>NEW!</b> Sonel KUS-100 <b>196</b>
	Leakage current alarm signaller <b>197</b>
	Demonstration boards <b>198-199</b>
	Tools <b>NEW!</b> Sonel NZ-2 / NZ-1 <b>200</b>
<b>SMT and THT assembly</b>	<b>201</b>
<b>Laboratory</b>	<b>202</b>



**Find out** what problems you can solve **using Sonel products**.

**Scan the code** of the selected area **with your smartphone**.



## Electromobility




Scan me

**EVSE** (*Electric Vehicle Supply Equipment*) charging stations are increasingly becoming part of the landscape of our cities, homes, workplaces and public spaces. Ensuring **maximum user safety** when operating them is the philosophy that defines our products. It is also important to guarantee **maximum comfort and ergonomics** by means of proper lighting in the charging area.




## Photovoltaics

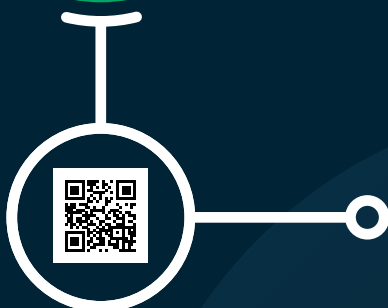

Scan me

Photovoltaic systems represent an **environmentally friendly source of renewable energy**. Photovoltaic cells work all year round - even in winter and the only condition for their operation is the presence of sunlight. Our equipment makes it possible to **measure the parameters of these systems**. A range of DC and AC side tests according to **EN 62446** is available, as well as all measurements to determine the **safety status of domestic electrical systems**.




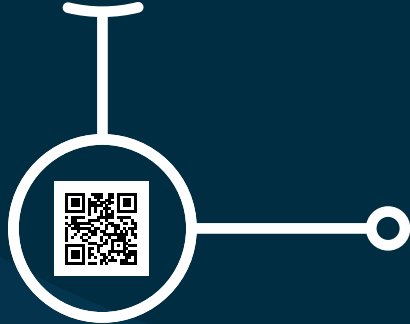

Scan me

## Industry and Production

Sonel devices let you monitor the production process as well as the quality of the manufactured products. Analyse the power quality and the electrical installation status in order to avoid failure of your machines and devices. Control the safety parameters, ensure trouble-free operation and optimise energy generation in the facility thanks to the use of numerous dedicated series of measuring instruments and thermal imaging cameras. Using Sonel instruments, you can also ensure the continuity of operation by diagnosing problems before the occurrence of failure of important installations and devices.

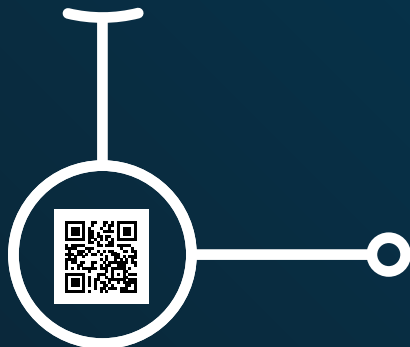

Scan me

## Energy Efficiency

In an era of rising utility prices, any savings are very welcome. When electricity, heat or fuel becomes more expensive, logic dictates that action needs to be taken appropriately to optimise the bills. Just which ones, specifically? How do you identify where and how to reduce costs? We want to help you answer these questions and offer you the tools you need to achieve your objectives: to improve energy efficiency with your customers, in your own business and at your home.

**Stay up to date** with our series of articles on areas of applications **and increase your safety.**



## Time has allowed us to gain experience. We are a leader on the market!

- 1989** The beginning of activity as the Innovation Implementation Centre in Wrocław
- 1990** The first digital fault loop tester is created
- 1994** The production plant in Świdnica is opened
- 1995** The first Polish microprocessor-based insulation resistance meter is created
- 1996** Export sales of meters are initiated
- 1997** Start-up of surface mounting process in an automated line, and the creation of the first Polish microprocessor-based fault loop impedance meter
- 1998** Change of company name and legal entity
- 1999** The first Polish microprocessor-based earth resistance meter is manufactured
- 2001** Implementation and certification of quality management system
- 2004** First multi-function meter
- 2006** Sales in over 20 countries around the world
- 2008** Relocation to new headquarters and purchase of the most modern SMT assembly line in the world
- 2008** Debut on the Warsaw Stock Exchange
- 2008** Over 200 employees barrier exceeded
- 2010** Thermal imagers added to offer
- 2011** Creation of the first Polish safety tester of electrical equipment
- 2012** Implementation of SPS production management system
- 2013** Establishment of the Polish-Indian company Sonel Instruments India Private Limited
- 2013** Foxytech founded
- 2015** Start of cooperation with Lincoln Electric and acquisition of Lower Silesian Economic Certificate
- 2016** Won gold medal at the ENERGETAB trade fair in Bielsko-Biała - the largest electrotechnics and energy exhibition in Poland for PQM-711: power quality analyzer
- 2017** Acquisition of accreditation of Polish Centre for Accreditation
- 2018** Won gold medal at the ENERGETAB trade fair for MPI-540: multi-function meter of electrical system parameters
- 2019** We are celebrating 25 years on the market
- 2020** Launch of the company's digital transformation
- 2022** Sonel MIC-2511: the first meter operating within the MeasureEffect™ platform
- 2022** Establishment of a subsidiary company in Singapore: Sonel South East Asia Pte Ltd
- 2023** Commissioning of a new automatic assembly line
- 2023** Establishment of the Customer Service
- 2024** Over 360 employees barrier exceeded
- 2024** Establishment of the Polish-German company MBS-Sonel GmbH
- 2024** We are celebrating 30 years on the market



## Quality and safety

Our products have achieved a high position on the market thanks to the continuous development of the technologies and functions of the products we offer and their adaptation to market requirements. This has been confirmed by the following international certificates: **Quality Management System ISO 9001:2015, Environmental Management System ISO 14001:2015, and Occupational Health and Safety Management System ISO 45001:2018**. Manufactured instruments are compliant with standards **EN 61557, EN 61010 as well as the electromagnetic compatibility directive**, which allows us to bear the full responsibility that comes with the CE mark that we place on our products.



## Be up to date with updates. Visit us online!

Complete product support is available on our website - including current: **meter firmware, drivers, instruction manuals, technical specifications and practical articles** that help to expand knowledge about the theory and practice of taking measurements.



for the latest news, visit:

[www.sonel.com](http://www.sonel.com)

[facebook.com/sonel.measurement.instruments](https://facebook.com/sonel.measurement.instruments)

[youtube.com/sonelsafilm](https://youtube.com/sonelsafilm)




## Modern technologies for you

Our offer is not limited to measuring instruments only. We also provide calibration and rating services in our accredited Calibration and Research Laboratory. The calibration offer applies to all electrical safety meters. Besides such instruments, we also test many other meters of electrical values, as well as thermal imagers, pyrometers, illuminance meters and similar instruments.

We offer SMT surface mounting assembly services on a professional, automated assembly line manufactured by FUJI. We have two SMT surface assembly lines, a THT through-hole assembly line and inspection stations. All Assembly process are fulfill in accordance to IPC-A-610D standard.

**We sincerely invite you to cooperate with us!**

**We sell our products in more than 100 countries around the world.**



## We care about our customers. Grow with us!

Excellent products, good logistical support, efficient guarantee and post-guarantee service as well as customer support after purchase are the most important elements of our success.

During numerous trainings, conferences and meetings organized by us, we systematically analyze the current needs of our clients

To satisfy these needs, we create new designs of measuring instruments that are fully adapted to users' expectations.















We are also preparing increasingly interesting training formulas. Over the course of training seminars and conferences, our specialists present the latest technological solutions, supported by an interpretation of currently applicable regulations and standards, and conduct practical demonstrations of measurement techniques.





















## Computer programs and mobile applications

Set of standard and optional applications

	Photo	Name	See page	MPI-540-PV	MPI-540	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-507	MPI-506	MPI-502F	MRP-201	PVM-1530	PVM-1020	IRM-1	MIC-15k1	MIC-5050/MIC-10k1	MIC-5005/MIC-5010	MIC-5001	MIC-2511	MIC-2501	MIC-30	MIC-10	MIC-5	MZC-320S/MZC-330S	MZC-310S	MZC-306	MZC-304F	MZC-20E	MRU-200/MRU-200-GPS	MRU-120HD	MRU-120	MRU-30	MRU-21	MRU-12	MRU-10	KT-1K	KT-670	KT-650	KT-560	KT-550	KT-530				
Computer programs		Sonel Reports Plus	103	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
		Sonel Reader	-	1	1	1	1	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*		
		Sonel ThermoAnalyze2	-																																													
		Sonel ThermoAnalyze3	113																																													
		Sonel IR Thermometer	114																																													
		Sonel VLF Tester Software	122																																													
		Sonel Analysis	162	*	*																																											
Mobile apps		Sonel PAT Analysis	169																																													
		Sonel MPI Mobile	56					1																																								
		Sonel MIC Mobile	61															1	1	1																												
		Sonel MRU Mobile	103																															1														
		Sonel KT Mobile	113																																													
		Sonel LKZ Mobile	134																																													
		Sonel Analysis Mobile	162																																													
		Sonel PAT Analysis Mobile	169																																													
		Sonel Multimeter Mobile	173																																													



1, 2, 4 - number of standard accessories  
 - optional accessories

KT-525	KT-520	KT-510	KT-256F	KT-256	KT-128	DIT-500	DIT-200	DIT-120	S-57 VLF	S-44 VLF	S-36 VLF	S-24 VLF	MMR-6700	MMR-6500	MMR-650	MMR-630	MMR-620	LKZ-2500	LXP-10A	LXP-10B	LXP-2	PQM-711	PQM-710	PQM-707	PQM-700	PAT-96	PAT-95	PAT-10	PAT-2E	PAT-2	CMM-60	CMM-40	CMM-30	CMM-11	CMM-10	CMP-3000	CMP-2000	CMP-1015-PV	CMP-1010	CMP-403/402	CMP-3KR	CMP-200F	CMP-200	CMP-100	BT-120	See page	Name	Photo					
													*	*	*	*	*																														103	Sonel Reports Plus					
													*	*	*	*	*		*	*	*	*				*	*	*	*	*																	*	-	Sonel Reader				
					*																																											-	Sonel ThermoAnalyze2				
*	*	*	*	*																																												113	Sonel ThermoAnalyze3				
						*																																										114	Sonel IR Thermometer				
								*	*	*	*																																					122	122				
																						1	1	1	1																						162	Sonel Analysis					
																										*	*	*	*	*																			169	Sonel PAT Analysis			
																																																56	Sonel MPI Mobile				
																																																61	Sonel MIC Mobile				
																																																103	Sonel MRU Mobile				
																																																113	Sonel KT Mobile				
																		1																														134	Sonel LKZ Mobile				
																						1	1																									162	Sonel Analysis Mobile				
																												1	1	1																				169	Sonel PAT Analysis Mobile		
																																1		1																	173	Sonel Multimeter Mobile	

## Measurement sets



WME-21  
WME-20  
WME-13  
WME-12  
WME-11  
WME-10  
WME-9  
WME-8

Set for measurements in photovoltaic systems

## SONEL WME-21

index: WMGBWMF21



**PVM-1020**  
Photovoltaic  
meter



**IRM-1**  
Solar radiation  
and temperature  
meter



**MRU-10**  
Earth  
resistance  
meter



**KT-256F**  
Thermal  
imager

### Capabilities

- » **PVM-1020** | It can be used for category 1 measurements according to IEC 62446-1.
- » **PVM-1020** | It converts measured parameters into STC conditions according to IEC 60891 by cooperation with the IRM-1 solar radiation and temperature meter.
- » **IRM-1** | Measurement of solar radiation and temperature.
- » **IRM-1** | The LoRa interface for communication with a master meter – offers a larger range than the Bluetooth technology!
- » **MRU-10** | Earthing resistance measurements of photovoltaic installations using the 3-pole method.
- » **KT-256F** | Infrared diagnostics.

### Standard accessories:

PVM-1020 meter	WMGBPVM1020
IRM-1 meter	WMGBIRM1
MRU-10 meter	WMGBMRU10
KT-256F thermal imager	WMGBKT256F
MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4
C-PV clamp	WACEGCPVOKR
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 2.2 m black 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 15 m red on a reel (banana plugs)	WAPRZ015REBBSZ
Test lead 30 m yellow on a reel (banana plugs)	WAPRZ030YEBBSZ
Test probe with banana socket; 1 kV; red	WASONREOGB1
2x earth contact test probe (rod), 25 cm	WASONG25
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
2x black "crocodile" clip 1 kV 20 A	WAKROBL20K01
USB charger	WAZASZ20
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24
8x AA 1.5 V battery	
2x AAA 1.5 V battery	
IRM-1 mounting&measuring set	WASONTPVCKPL
XL-14 hard case	WAWALXL14
Type C USB cable	WAPRZUSBC
32 GB microSD card	WAP0ZMSD32
Wristband	WAP0ZPAS1
2x meter strap (type M-1)	WAP0ZSZE4
Factory calibration certificate - PVM-1020	
Factory calibration certificate - IRM-1	
Factory calibration certificate - MRU-10	
Declaration of verification - KT-256F	

	PVM-1020	IRM-1	MRU-10	KT-256F
<b>Safety and work conditions</b>				
Measuring category according to EN 61010	IV 300 V, III 600 V, II 1000 V DC	-	III 300 V	-
Ingress protection	IP65	IP65	IP67	IP54
Dimensions	228 x 102 x 61 mm	134 x 79 x 28 mm	220 x 102 x 61 mm	194 x 62 x 76 mm
Weight	ca. 1.0 kg	ca. 0.2 kg	ca. 0.7 kg	ca. 0.4 kg
<b>Memory and communication</b>				
Memory of measurement results	4 059 records	user measurement memory: 999 records recorder: 5000 records	-	32 GB
Data transmission	Bluetooth	USB	-	USB
Communication with IRM-1	LoRa	-	-	-
Communication with a master meter	-	LoRa	-	-





## SONEL WME-20

index: WMGBWME20



**PVM-1020**  
Photovoltaic meter



**IRM-1**  
Solar radiation  
and temperature meter



**KT-256F**  
Thermal  
imager

### Capabilities

- » **PVM-1020** | It can be used for category 1 measurements according to IEC 62446-1.
- » **PVM-1020** | It converts measured parameters into STC conditions according to IEC 60891 by cooperation with the IRM-1 solar radiation and temperature meter.
- » **IRM-1** | Measurement of solar radiation and temperature.
- » **IRM-1** | The LoRa interface for communication with a master meter – offers a larger range than the Bluetooth technology!
- » **KT-256F** | Infrared diagnostics.

	PVM-1020	IRM-1	KT-256F
<b>Safety and work conditions</b>			
Measuring category according to EN 61010	IV 300 V, III 600 V, II 1000 V DC	-	-
Ingress protection	IP65	IP65	IP54
Dimensions	228 x 102 x 61 mm	134 x 79 x 28 mm	194 x 62 x 76 mm
Weight	ca. 1,0 kg	ca. 0,2 kg	ca. 0,4 kg
<b>Memory and communication</b>			
Memory of measurement results	4 059 records	user measurement memory: 999 records recorder: 5000 records	32 GB
Data transmission	Bluetooth	USB	USB
Communication with IRM-1	LoRa	-	-
Communication with a master meter	-	LoRa	-

### Standard accessories:

PVM-1020 meter	WMGBPVM1020
IRM-1 meter	WMGBIRM1
KT-256F thermal imager	WMGBKT256F
MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4
C-PV clamp	WACEGCPVOKR
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
Black "crocodile" clip 1 kV 20 A	WAKROBL20K01
USB charger	WAZASZ20
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24
4x AA 1.5 V battery	
2x AAA 1.5 V battery	
IRM-1 mounting&measuring set	WASONTPVCKPL
XL-14 hard case	WAWALXL14
Type C USB cable	WAPRZUSBC
32 GB microSD card	WAPZMSD32
Wristband	WAPZPAS1
Meter strap (type M-1)	WAPZSZSE4
Factory calibration certificate - PVM-1020	
Factory calibration certificate - IRM-1	
Declaration of verification - KT-256F	



Set for testing electrical installations

## SONEL WME-13

index: WMGBWME13



**MPI-507**  
Multifunctional electrical  
installations meter



**KT-256F**  
Thermal imager

### Capabilities

- » MPI-507 | Measurement of short circuit loop parameters.
- » MPI-507 | Testing RCD breakers of AC, A types.
- » MPI-507 | Earth resistance measurement.
- » MPI-507 | Insulation resistance measurement.
- » MPI-507 | Measurement of resistance of protective conductors and equipotential bondings.
- » MPI-507 | Phase sequence indication.
- » KT-256F | Infrared diagnostics.

	MPI-507	KT-256F
<b>Safety and work conditions</b>		
Measuring category according to EN 61010	IV 300 V, III 600 V	-
Ingress protection	IP67	IP54
Dimensions	220 x 102 x 61 mm	194 x 62 x 76 mm
Weight	ca. 0.8 kg	ca. 0.4 kg
<b>Memory and communication</b>		
Memory of measurement results	990 cells, 10 000 records	32 GB
Data transmission	Bluetooth	USB

### Standard accessories:

MPI-507 meter	WMGBMPI507
KT-256F thermal imager	WMGBKT256F
WS-03 adapter with START button with UNI-SCHUKO plug	WAADAWS03
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 30 m, red (banana plugs, on H-frame reel)	WAPRZ030REBBN
Test lead 15 m, blue (banana plugs, on H-frame reel)	WAPRZ015BUBBN
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
Test probe with banana socket; 1 kV; blue	WASONBUOGB1
Test probe with banana socket; 1 kV; yellow	WASONYE0GB1
Test probe with banana socket; 1 kV; red	WASONRE0GB1
2x Earth contact test probe (rod), 25 cm	WASONG25
USB charger	WAZASZ20
L-9 hard carrying case	WAWALL11
Type C USB cable	WAPRZUSBC
16 GB microSD card	WAP0ZMSD16
Meter strap (type M-1)	WAP0ZSZE4
Meter strap (type M-1)	WAP0ZUCH1
M1 hanging hook straps	WAP0ZPAS1
4x AAA 1.5 V battery	
Factory calibration certificate - MPI-507	
Factory calibration certificate - KT-256F	



Set for testing electrical installations

## SONEL WME-12

index: WMGBWME12



**MPI-507**  
Multifunctional electrical  
installations meter



**KT-128**  
Thermal imager

### Capabilities

- » **MPI-507** | Measurement of short circuit loop parameters.
- » **MPI-507** | Testing RCD breakers of AC, A types.
- » **MPI-507** | Earth resistance measurement.
- » **MPI-507** | Insulation resistance measurement.
- » **MPI-507** | Measurement of resistance of protective conductors and equipotential bondings.
- » **MPI-507** | Phase sequence indication.
- » **KT-128** | Infrared diagnostics.

	MPI-507	KT-128
<b>Safety and work conditions</b>		
Measuring category according to EN 61010	IV 300 V, III 600 V	-
Ingress protection	IP67	IP54
Dimensions	220 x 102 x 61 mm	194 x 62 x 76 mm
Weight	ca. 0.8 kg	ca. 0.4 kg
<b>Memory and communication</b>		
Memory of measurement results	990 cells, 10 000 records	32 GB
Data transmission	Bluetooth	USB

### Standard accessories:

MPI-507 meter	WMGBMPI507
KT-128 thermal imager	WMGBKT128
WS-03 adapter with START button with UNI-SCHUKO plug	WAADAWS03
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 30 m, red (banana plugs, on H-frame reel)	WAPRZ030REBBN
Test lead 15 m, blue (banana plugs, on H-frame reel)	WAPRZ015BUBBN
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
Test probe with banana socket; 1 kV; blue	WASONBUOGB1
Test probe with banana socket; 1 kV; yellow	WASONYE0GB1
Test probe with banana socket; 1 kV; red	WASONRE0GB1
2x Earth contact test probe (rod), 25 cm	WASONG25
USB charger	WAZASZ20
L-9 hard carrying case	WAWALL11
Type C USB cable	WAPRZUSBC
16 GB microSD card	WAP0ZMSD16
Meter strap (type M-1)	WAP0ZSZE4
M1 hanging hook straps	WAP0ZUCH1
Wristband	WAP0ZPAS1
4x AAA 1.5 V battery	
Factory calibration certificate - MPI-507	
Factory calibration certificate - KT-128	





Installation set

## SONEL WME-11

index: WMGBWME11



**CMM-30**  
Industrial multimeter



**NZ-2**  
Screwdriver set, 6-pieces +  
voltage tester

### Capabilities

- » **CMM-30** | Measurement of voltage, current, resistance, Low Z, frequency, capacitance, duty cycle, temperature, continuity, diode test.
- » **NZ-2** | Assembly and disassembly of screw connections.
- » **NZ-2** | Detection of voltage presence.

### Standard accessories:

CMM-30 meter	WMGBCMM30
NZ-2 set	WNZ2
Test leads set (CAT IV, M)	WAPRZCMM2
Temperature probe (type K)	WASONTEMK
Type K temperature probe adapter	WAADATEMK
M1 hanging hook straps	WAPOZUCH1
Magnetic hanging strap	WAPOZUCH6
Basic case	
S-9 carrying case	WAFUTS9
M-6 carrying case	WAFUTM6
2x watertight socket protection plug	
4x AAA 1.5 V battery	
Factory calibration certificate - CMM-30	

Installation set

## SONEL WME-10

index: WMGBWME10



**CMP-200F**  
Fork clamp meter





**NZ-2**  
Screwdriver set, 6-pieces +  
voltage tester

### Capabilities

- » **CMP-200F** | Measurement of voltage, current, resistance, capacitance.
- » **NZ-2** | Assembly and disassembly of screw connections.
- » **NZ-2** | Detection of voltage presence.

### Standard accessories:

CMP-200F meter	WMGBCMP200F
NZ-2 set	WNZ2
Test leads set (CAT IV, M)	WAPRZCMM2
Basic case	
S-9 carrying case	WAFUTS9
M-16 carrying case	WAFUTM16
2x AAA 1.5 V battery	
Factory calibration certificate - CMP-200F	



## SONEL WME-9

index: WMGBWME9



**MPI-502F**  
Multifunctional  
electrical installations  
meter



**MIC-10**  
Insulation  
resistance  
meter



**CMP-200F**  
Fork clamp meter

### Standard accessories:

MPI-502F meter	WMGBMPI502F
MIC-10 meter	WMGBMIC10
CMP-200F meter	WMGBCMP200F
WS-03 adapter with START button with UNI-SCHUKO plug	WAADAWS03
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
2x Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Set of test leads (CAT IV, M)	WAPRZCMM2
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Black "crocodile" clip 1 kV 20 A	WAKROBL20K01
Test probe with banana socket; 1 kV; blue	WASONBUOGB1
Test probe with banana socket; 1 kV; black	WASONBLOGB1
2x Test probe with banana socket; 1 kV; red	WASONREOGB1
L-9 hard carrying case	WAWALL9
Standard carrying case	
Meter strap (type M-1)	WAPOZSZE4
10x AAA 1.5 V battery	
Factory calibration certificate - MPI-502F	
Factory calibration certificate - MIC-10	
Factory calibration certificate - CMP-200F	

### Capabilities

- » **MPI-502F** | Measurement of short circuit loop parameters.
- » **MPI-502F** | Testing RCD breakers of AC, A types.
- » **MPI-502F • MIC-10** | Measurement of resistance of protective conductors and equipotential bondings.
- » **MIC-10** | Insulation resistance measurements with voltage up to 1000 V.
- » **CMP-200F** | Measurement of voltage, current, resistance, capacitance.

	MPI-502F	MIC-10	CMP-200F
<b>Safety and work conditions</b>			
Measuring category according to EN 61010	IV 300 V, III 600 V	IV 600 V, III 1000 V	IV 600 V, III 1000 V
Ingress protection	IP67	IP67	IP40
Dimensions	228 x 102 x 61 mm	220 x 102 x 61 mm	230 x 44 x 66 mm
Weight	ca. 0.8 kg	ca. 0.6 kg	ca. 0.3 kg
<b>Memory and communication</b>			
Memory of measurement results	990 cells, 10 000 records	-	-
Data transmission	Bluetooth	-	-



Set for installation and grounding measurements in photovoltaic systems

## SONEL WME-8

index: WMGBWME8



**PVM-1020**  
Photovoltaic meter



**IRM-1**  
Solar radiation  
and temperature meter



**MRU-10**  
Earth resistance meter

### Capabilities

- » **PVM-1020** | It can be used for category 1 measurements according to IEC 62446-1.
- » **PVM-1020** | It converts measured parameters into STC conditions according to IEC 60891 by cooperation with the IRM-1 solar radiation and temperature meter.
- » **IRM-1** | Measurement of solar radiation and temperature.
- » **IRM-1** | The LoRa interface for communication with a master meter – offers a larger range than the Bluetooth technology!
- » **MRU-10** | Earthing resistance measurements of photovoltaic installations using the 3-pole method.

	PVM-1020	IRM-1	MRU-10
<b>Safety and work conditions</b>			
Measuring category according to EN 61010	IV 300 V, III 600 V, II 1000 V DC	-	III 300 V
Ingress protection	IP65	IP65	IP67
Dimensions	228 x 102 x 61 mm	134 x 79 x 28 mm	220 x 102 x 61 mm
Weight	ca. 1.0 kg	ca. 0.2 kg	ca. 0.7 kg
<b>Memory and communication</b>			
Memory of measurement results	4 059 records	user measurement memory: 999 records recorder: 5000 records	-
Data transmission	Bluetooth	USB	-
Communication with IRM-1	LoRa	-	-
Communication with a master meter	-	LoRa	-

### Standard accessories:

PVM-1020 meter	WMGBPVM1020
IRM-1 meter	WMGBIRM1
MRU-10 meter	WMGBMRU10
MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4
C-PV clamp	WACEGCPVOKR
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 2.2 m black 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 15 m red on a reel (banana plugs)	WAPRZ015REBBSZ
Test lead 30 m yellow on a reel (banana plugs)	WAPRZ030YEBBSZ
Test probe with banana socket; 1 kV; red	WASONREOGB1
2x earth contact test probe (rod), 25 cm	WASONG25
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
2x black "crocodile" clip 1 kV 20 A	WAKROBL20K01
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24
8x AA 1.5 V battery	
2x AAA 1.5 V battery	
IRM-1 mounting&measuring set	WASONTPVCKPL
XL-14 hard case	WAWALXL14
2x meter strap (type M-1)	WAPZSZSE4
Factory calibration certificate - PVM-1020	
Factory calibration certificate - IRM-1	
Factory calibration certificate - MRU-10	





# Electrical safety measurements


Current regulations require the measurements of electrical systems both during commissioning (after completing the installation, after any change or extension of the system), as well as regularly during the operation. The scope of acceptance or periodic inspection is specified in standard HD 60364-6. Requirements for measuring instruments are defined in standard EN 61557. Protective measures include, depending on needs, the measurement of fault loop impedance, insulation resistance, continuity of protection and equipotential bonding, earthing resistance and parameters of residual current devices. Devices used for this type of measurement shall have a document confirming their technical efficiency. Pursuant to the Metrology Act, this document shall be a calibration certificate. The period between checks of the instrument, recommended by the manufacturer is 12 months.

## Measurement of fault loop impedance

One of measures for electric shock protection is a protection against indirect contact in circuits equipped with overcurrent protection - it is based on automatic disconnection of power supply in case of a dangerous touch voltage on the exposed conductive elements. In such case, the current will flow in the circuit of phase-protective conductor, and it is called the short-circuit current which should trip the overcurrent switch and power supply. As the exposed elements cannot remain too long under dangerous touch voltage, the protection has to trip in a sufficient time, which is specified in binding standards. The condition for correct protection is specified by the following formula:

$$Z_s = \frac{U_n}{I_A}$$


where:  $Z_s$  - fault loop impedance,  $I_A$  - current triggering overcurrent protection in required time (depending on the time-current characteristic of applied protection and required disconnection time),  $U_n$  - rated voltage of the network in relation to the earth.

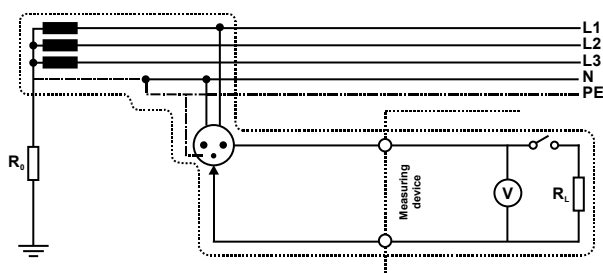


The impedance value  $Z_s$  (needed to determine whether the protection is correct) shall be measured. During fault loop measurement performed by the technical "method, an "artificial short circuit" is generated. The instrument measures the voltage without load and after that during a short-term load from short-circuit resistor. Fault loop impedance is calculated based on the difference in voltage drops. This measurement may be performed using the following fault loop impedance meters: MZC-304F, MZC-306, MZC-310S, MZC-320S and MZC-330S and MPI multifunctional meters - all of them indicate also components of the impedance, resistance and reactance.

$$Z = \sqrt{R^2 + X^2}$$

Fault loop impedance meters (except MZC-310S, MZC-320S and MZC-330S) provide also the measurement in L-PE circuits in systems protected by RCDs without any interference in the circuit. This measurement is carried out with current lower than 15 mA and it is extended in time, while the resolution of the result, is the same as for other measurements, i.e. 0.01  $\Omega$ . High current meters MZC-310S, MZC-320S and MZC-330S provide measurements with a result resolution of 0.1 m $\Omega$  (supply points, switchgear centres, transformer stations) applying the test current up to 300 A, which provides measurements in accordance with EN 61557 standard, even for circuits where the value of the fault loop impedance is in milli-ohm order.

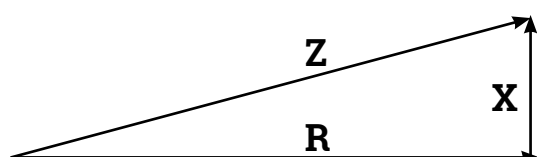

Fault loop impedance meters may be used for measuring the earth resistance by using an auxiliary voltage source (phase conductor of the network). The measured value is then overstated - the measurement result is the sum of resistance of the measured earth electrode, operational earthing system, source and phase conductor.

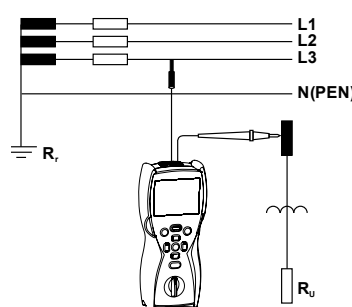


## MZC-306 offers the measurements

- » for any AC voltages
- » up to 750 V – also in industrial systems.


## Measurement of insulation resistance

The insulation condition is crucial for the operational safety and proper functioning of the system and electric appliances, guaranteeing also protection against direct contact. Systematic inspection of the insulation is necessary to detect its deterioration and it is a permanent element of measurement and control works. In case of measurements on industrial equipment it is crucial to determine the tendency of changes in the resistance, which may indicate a gradual deterioration of the insulation. The basic factors causing the insulation degradation include: electrical and mechanical exposures, chemical attack, thermal exposure and environmental pollution; their impact during normal operation of electrical system causes insulation wear and tear. Insulation resistance measurements are performed with direct current (DC), to eliminate the impact of capacitance on the results. The method of measuring insulation resistance and the required test voltages are specified in standards: PN-HD 60364-6; PN-E-04700; EN 61557-2. During the measurements, after applying the voltage, the insulation conducts electricity. During the resistance measurement, the current flowing through the insulation (1) consists of the following components:


- » capacitance charging current (2) - it depends on the capacitance (e.g. on the length of the tested cable),
- » polarization (absorption) current (3) - the result of charges and dipoles moved by electric field,
- » insulation leakage current (4) - the sum of currents flowing through the material and on its surface.

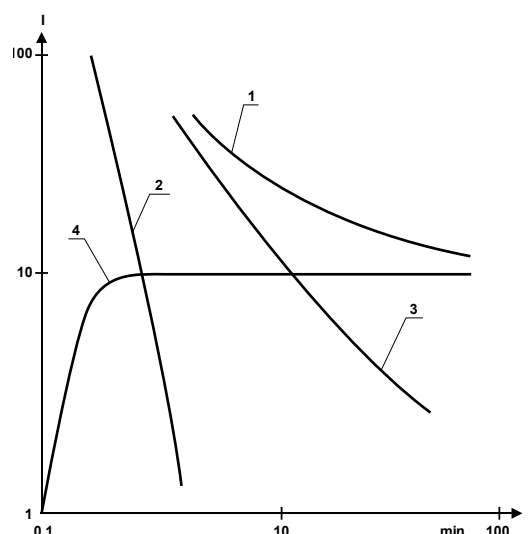

Due to the nature of the current flowing through the insulation, the measured insulation resistance value is affected by the time of measurement as well as by humidity, temperature, measurement voltage and surface cleanliness of the insulating material.

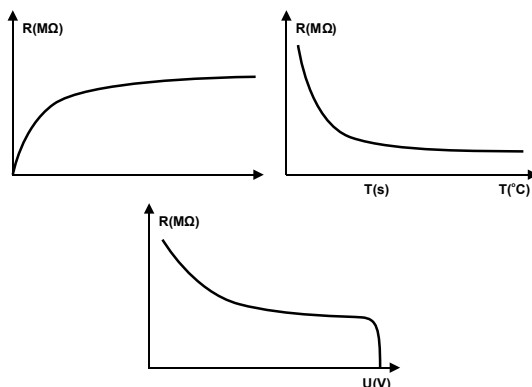

The 3-wire method, used in all advanced instruments, allows user to eliminate the impact of surface leakage current. In case of cables, wrap the core insulation with metal foil, which is connected to the shield terminal of the meter - only leakage current flowing through the insulation is measured. The measurement by 3-wire method is recommended for large areas exposed to pollutants (cables of large diameter, HV bushings, transformers, HV switches):

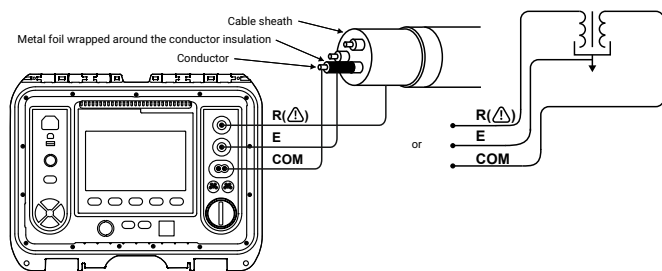


Using the 3-wire method is important in the case of measurements of objects with very large resistance values (100 M)

Meters MIC-10k1, MIC-5050, MIC-5010, MIC-5005, MIC-5001, MIC-2511, MIC-2501, MIC-30 as well as MPI-525 multifunctional meter, perform measurements at a specified time and provide readouts in intervals set by the user. The obtained results are used to calculate one or two absorption coefficients, providing information about the condition of the insulation. Before the measurements, make sure that the tested object is disconnected from the mains. Upon detection of voltage on the object (or when voltage appears during the measurements), the device stops the measurement signals the anomaly. During the measurement, the device displays the current, instantaneous value of the resistance or the current value of the leakage current. After completing the measurement, the devices save the values measured at the end of periods sets by the user (the range from 1 to 600 s) and the tested object is discharged by the device.

### Measurements of RCD parameters

The main function of the Residual Current Device (RCD) is an additional protection against electric shock by disconnecting the protected circuit from power supply, when the circuit is subject to earth overcurrent.

When the circuit protected by the RCD is free from damage (differential current  $I_{\Delta} = 0$ ), the inflow current  $I_1$  is equal to outflow current  $I_2$ . In case of any damage (e.g. punctured insulation) fault current  $I_{\Delta}$  starts to flow and value of  $I_2$  current is lower than  $I_1$ .



The RCD will trip (disconnecting power supply) if the measured difference of currents  $I$  and  $I_2$  exceeds a certain characteristic for the RCD value. When a fault current flows,  $U_B$  voltage will appear on the housing of the protected device, which in accordance with Ohm's law is:

$$U_B = I_{\Delta} \cdot R_E$$


Rating current of the circuit breaker  $I_{\Delta n}$  should be selected in a way ensuring that the contact voltage generated during fault current flow does not exceed the allowable long-term voltage  $U_L$ :

$$I_{\Delta n} < \frac{U_L}{R_E}$$

A system equipped with RCD must have, for safety reasons, a protective earthing conductor (PE). Therefore, the RCDs cannot be installed in networks without a dedicated protective conductor. RCD does not limit the fault current value, but only the time of its flow. However, as the criterion for tripping the RCD is the fault current exceeding the rated current of the RCD, it must be chosen appropriately to the type of protected devices. Due to the response time, the residual circuit devices are divided into: normal, short-time delay [G] - intended for receivers and circuits, where momentarily, small leakage currents and selective may occur. [S] - having a delayed triggering time, which is the minimum time, during which the device does not trip, despite the difference between the current flowing in and flowing out to/from the circuit. Depending on the shape of the fault current that causes tripping, the switches may be divided into: AC circuit breakers marked with [~] responding to a differential sinusoidal current, type A, marked with [A] responding to the sinusoidal, unidirectional pulsating current and pulsating current with constant component up to 6 mA, and B type switches marked with [B] responding to the sinusoidal, unidirectional pulsating current and pulsating current with constant component and to direct current Measurements on RCDs may be performed with MRP-201

meter or by multifunctional meters MPI.

During each measurement procedure (except AC voltage measurements), the me-

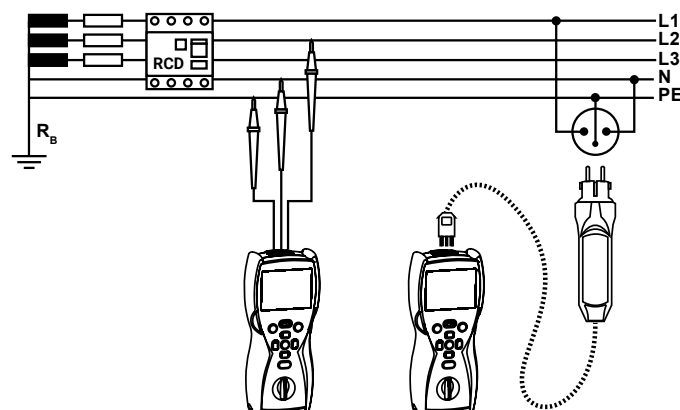

ter controls whether the resulting contact voltage does not exceed the predetermined voltage allowable for longer periods. If this value is exceeded, the measurement will be automatically interrupted (i.e. the differential test current is switched off). The value of the long-term allowable touch voltage can be set to 25 V or 50 V and for selective switches additionally at 12.5 V. The tripping time of RCD is measured from the start of differential current flow until the tripping of RCD - the user may select the initial phase (or polarity) as positive or negative. The maximum measured value of the triggering time is 300 ms, and with selected measurement of selective switches it is 500 ms. Tripping current of RCD is measured after enforcing a differential current increasing linearly in the tested circuit. The increases from approx. 30% of  $I_{\Delta n}$  until RCD is tripped or  $I_{\Delta n}$  exceeded for AC breakers (140% and 200% for A and B respectively).

With the touch electrode installed in the devices, instruments for RCD measurements may check the correctness of connections in the socket. When the voltage between the touch electrode and the protective conductor (PE) connected to the socket exceeds 50 V, the device will inform the user about it.

### Measurements of resistance-to-earth

Earthing is an essential element of any electrical system regardless of its rated voltage. The efficient earthing system is important for:


- » human safety during the operation of electrical devices,
- » proper operation of electrical equipment,
- » elimination or significant reduction of the impact of lightning.

Earthing systems may be called differently depending on their destination. e.g.:

- » protective,
- » functional (working),
- » lightning protection,
- » auxiliary.


Checking the effectiveness of earthing, i.e. measuring its resistance or impedance, is carried out to determine whether the received value will effectively drain fault current. Term "effectiveness" means that the resistance does not exceed the maximum value allowed for the particular case and the type of the earth electrode.

Earthing system is subject to periodic checks, during the operation in order to assess whether corrosion or changes in soil resistivity do not significantly affect its performance.

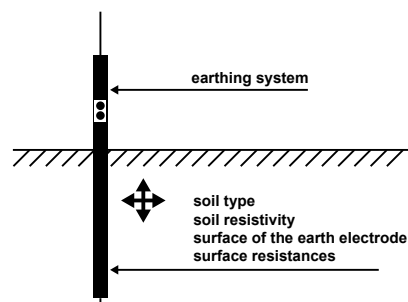

## Methods of performing measurements are described in detail at [www.sonel.com](http://www.sonel.com)


Earthing measurements may be carried out with multifunctional meters having the appropriate functions and with specialist meters of MRU series. The method most commonly used for measuring earth resistance is the 3-pole method, where the meter calculates the resistance by measuring the voltage across its terminals after applying test current. For measurements of individual earthing systems, the most commonly used is 3-pole method of potential drop, which enforces current flow in the following circuit: the meter - tested earthing system - current electrode - the meter. Distances between the electrodes should be as large as possible; in practice, the distance is >30 m between the tested earth electrode and the current electrode.

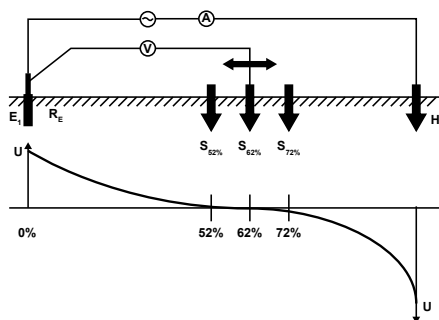

Distribution of voltage during the flow of the test current


Voltage electrode is driven into the ground between the measured earth electrode and the current electrode in the area of the so-called zero potential. In practice, it is recommended to perform three measurements, changing the position of the voltage electrode by several meters in a direction from and to the tested earthing. If the results are identical, the place of driving the electrode into the ground has been chosen correctly. The measurement is performed with a current at a frequency that allows to avoid interference and distortion having the frequency of the network (50 Hz or 60 Hz) and its harmonics. Advanced earth resistance/resistivity meters of MRU series check and indicate the size of interference voltages before starting the measurement. In addition, these meters calculate the additional error related with too high resistance of electrodes.

Advanced devices have the ability to perform measurements using 4-lead method, eliminating the impact of the resistance of cable used to connect the meter with tested earthing system.

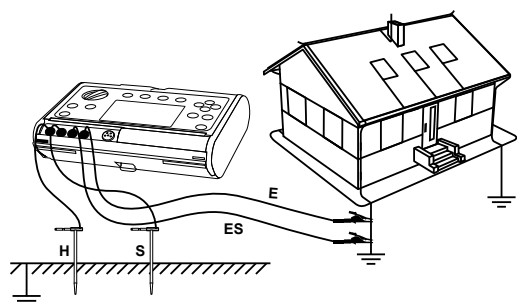

Measurement of resistance to earth - the 4-lead method


Nuisance arising from the need to disconnect individual earth electrodes when testing the systems with multiple electrodes may be eliminated by using the 3-pole method with additional clamps (MRU-30, MRU-120, MRU-120HD, MRU-200, MRU-200-GPS, MPI-530, MPI-530-IT, MPI-535, MPI-536, MPI-540, MPI-540-PV). Current and voltage electrodes are arranged similarly to the 3-pole method, but the current is measured with clamps attached to the tested earthing. The meter calculates the resistance knowing that part of the current which flows through the tested earth electrode. The method of measurement with clamps cannot be used in multiple systems, which have individual earth electrodes connected to each other underground.

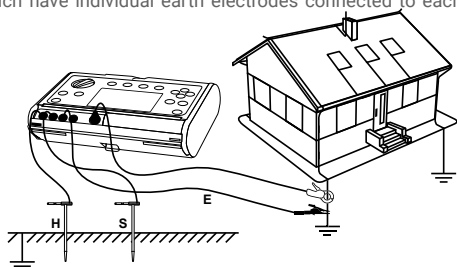

Measurement of resistance to earth - the 3P method + clamps

The 3-pole method with additional clamp has one more variation. Instead of using a directly connected current clamp with a split core, this method uses a special ERP-1 adapter. ERP-1 works with MRU meters with a measuring current of 200 mA. With use of a flexible clamp, it is possible to measure the total value of the current flowing through the earthing points of objects such as high and medium voltage pylons with a lattice structure or prestressed concrete spun transmission poles of medium and low voltage lines. The measurement procedure consists in wrapping the entire pole with the earthing with flexible clamp, thanks to which we measure the entire current flowing in the circuit to the ground.

The two-clamp method (MRU-30, MRU-120, MRU-120HD, MRU-200, MRU-200-GPS, MPI-530, MPI-530-IT, MPI-535, MPI-536, MPI-540, MPI-540-PV) allows the user to measure the resistance of multiple earthing systems, without the need to drive auxiliary electrodes into the ground. During this measurement, the current generated by transmission clamps is closed within the following circuit: tested earthing system + parallel connection of other earthing probes and it is measured by the receiving clamps to provide data for calculating the circuit resistance. As the parallel connection of a few resistances generates the resultant resistance of much lower value, the result is higher than the tested resistance. The difference is the smaller, the more earthing electrodes is within the tested object.

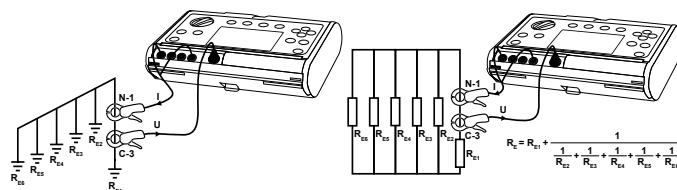

Connection of the meter in the 2-clamp method


Equivalent circuit of multiple earthing system in the 2-clamp method

The 2-clamp method is used for measurements of systems with multiple earthing electrodes not connected with each other underground. If the earthing electrodes are also connected underground, this method allows user to measure only the continuity of the circuit.

In the earthing system assessed for electric shock protection, it is important to maintain currents of low frequency (50, 60 Hz). The task of the lightning protection earthing systems is to discharge lightning strikes into the ground. The pulsed nature of such discharge makes the inductive component of the earth electrode quite important, as the lightning current is effectively discharged only by a part of the earth electrode, located in the immediate vicinity of the discharge. Therefore an earth electrode with low static resistance, which provides good basic protection does not ensure adequate lightning protection parameters - especially in the case of extensive earthing systems, having low static resistance, but several times higher dynamic impedance. The measurement using the impulse method (MRU-200, MRU-200-GPS), in accordance with: EN 62305 and withdrawn, but still applied PN-86/E-05003, enables user to diagnose the parameters of dynamic lightning protection earthing systems. The pulsed nature of the measurement does not require the disconnection of the earthing in case of multiple earthing probes or live objects, as the test current pulse, similarly to lightning stroke, operates only within a limited distance. The measurement is carried out in accordance with the description specified in EN 62305 standard. This method allows to determine the theoretical value of the surge impedance ( $Z_s$ ), which is the ratio of peak voltage to peak current.

The surge impedance specified in the standard is a theoretical value, as generally peaks of voltage and current do not occur simultaneously. The surge impedance is considered an indicator of the effectiveness of earthing systems in the conditions of stricter or special protection.


Parameters of the test pulse (which simulates the shape of the lightning) are defined by two numbers: the pulse leading edge duration  $T_1$  and a time to half-peak  $T_2$ . The MRU-200 / MRU-200-GPS meter provides a selection of three pulse shapes: 10/350  $\mu$ s, 8/20  $\mu$ s and 4/10  $\mu$ s. Pursuant to EN 62305, the pulse with a shape of 10/350  $\mu$ s is typical for the first stroke of the lightning current. The same pulse is specified as a reference pulse in EN62305-1 standard. Pulse 4/10  $\mu$ s has parameters resulting from PN-92/E-04060.

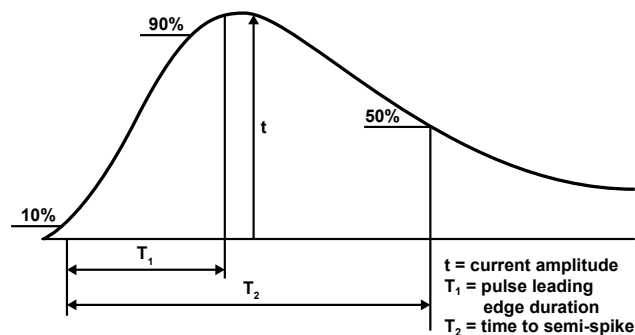

The shape of test pulse in the impulse method




## All devices comply with European directives on electromagnetic compatibility and safety and are marked with $\text{CE}$

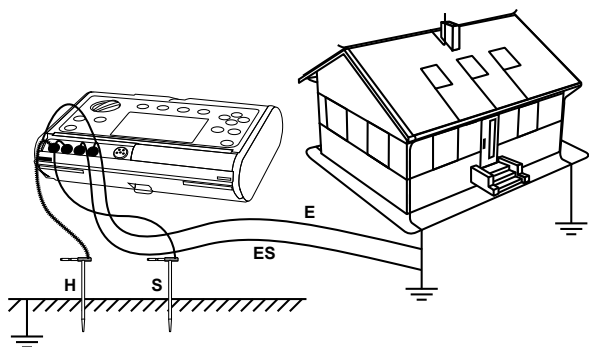

Earthing impedance measurement system (4P impulse method)

When the impulse method is used for measurements on multiple earthing systems, connected both above and under the ground, the test pulse operates only in the close proximity of tested earthing electrode, which allows user to carry out the measurement without the need to disconnect testing terminals and equipotential bondings - i.e. without the need to disconnect the power supply of the object.

The impulse method may also be used to measure the impedance of earthing used for HV poles; it allows also to determine the earthing impedance of the entire pole, including both ground band systems as well as the resistance of pole legs, and it may be used without the need to disconnect the tested HV line or to remove components of the earthing system.




Measurements of HV pole earthing

Knowledge of the soil resistivity value (MRU-12, MRU-30, MRU-120, MRU-120HD, MRU-200, MRU-200-GPS, MPI-530, MPI-530-IT, MPI-535, MPI-536, MPI-540, MPI-540-PV) is important at the stage of designing the earthing system.

Knowing the cross-section of the soil, the user may select the appropriate type of earthing system - e.g. for low resistivity values occurring only at a certain depth, the single earth electrode may be designed as deeply immersed, whereas for soil with low resistivity at the shallower area; or rock base with a greater depth - it will be a set of shorter earthing electrodes connected by a vertical metal band.

Soil resistivity measurement is performed using four electrodes arranged linearly at equal distances (Wenner method) or different distances (Schlumberger method). In the Wenner method, the soil resistivity is measured at the depth equal to 0.7 of the distance between the probes.

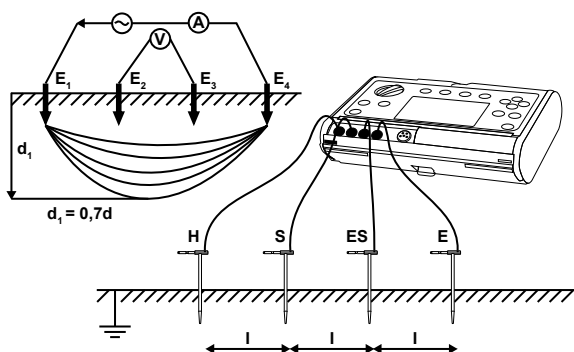

Measurement of soil resistivity by the Wenner method

### Facilitating the measurements

During measurements carried out under voltage (earth fault loop impedance, RCD parameters, voltage, sequence of phases) conductors ended with blade probes or crocodile clips may be used (of adequate measuring categories with a shape prevent slipping or disconnecting), as well as adapters suitable for measuring terminals/sockets.

Meters connected to the system equipped with sockets by a cable terminated with a mains plug, or by wires, automatically check the correctness of connections and signal any abnormalities. Measurements in single-phase sockets may be carried



out using adapters ended with Uni-Schuko plug; the measurements are performed also in the case of exchanging the phase conductor with neutral conductor (without the need for manual switching or using additional adapters). In addition, WS-01 and WS-03 adapters have buttons for triggering measurements and saving recorded values. For the measurements in three-phase or HV sockets, one of the following adapters may be optionally used: for three-phase sockets AGT-16P, AGT-32P, AGT-63P AGT-16C, AGT-32C and for HV sockets AGT-16T and AGT-32T.

Family of AutoISO adapters facilitate the insulation measurements carried out with suitable devices on insulation of 3-, 4- and 5-wire cables, without the need of manual selection of pairs and combinations of the measured wires. Adapter cables ended with crocodile clips (depending on the position 3, 4 or all 5) are attached to the tested cable cores; when the measurement is started, the adapter connected



AutoISO-1000

AutoISO-2500

AutoISO-2511



AutoISO-5000



TWR-1J

with the meters, performs the sequence of all required tests.

**AutoISO-2500** and **AutoISO-2511** adapter allows user to perform tests on cables under 2500 V voltage. In other hand, for **AutoISO-5000** adapter the test voltage is as high as 5000 .

**TWR-1J** adapter enables user to check RCD parameters before installing it within the system.

Instruments for measuring earth resistance are delivered with many ergonomic accessories that simplify measurements. Cables used for testing earthing systems, due to their length (50, 30, 25,15 meters) are wound on drums made of a material resistant to frost and strokes, allowing fast winding and unwinding by the user.

Sonel offers also long probes (80 cm) with a suitable cover, clamps of high sensitivity and accuracy (C-3, N-1) for earthing measurements without the need to disconnect the test connections or for current measurements, as well as special terminals guaranteeing adequate contact.

Measuring devices are supplied in appropriate casings or suitcases fitted to their sizes with inner compartments for transporting measuring accessories.

Detailed lists of standard and optional accessories can be found at the end of product groups.

# Multi-function meters of electrical system parameters

MPI-540-PV

MPI-540

MPI-536

MPI-535

MPI-530-IT

MPI-530

MPI-525

MPI-520

MPI-507

MPI-506

MPI-502F

EVSE-100

EVSE-01







MRP-201

IRM-1

PVM-1530



PVM-1020

## Comparison of multi-function meters

						
	<b>MPI-540-PV / MPI-540 / MPI-536 / MPI-535</b>	<b>MPI-530-IT / MPI-530</b>	<b>MPI-525</b>	<b>MPI-520</b>	<b>MPI-507 / MPI-506</b>	<b>MPI-502F</b>
Display	7" LCD touchscreen	LCD graphic	LCD graphic	LCD graphic	segmented LCD	segmented LCD
Network parameters recorder	three-phase / three-phase / – / –	single-phase	–	–	–	–
Autotests	✓	–	–	–	–	–
Energy losses calculator	✓ / ✓ / – / –	–	–	–	–	–
<b>Fault loop impedance resolution [Ω]</b>	0...1999	0...1999	0...1999	0...1999	0...1999	0...1999
Maximum resolution of fault loop impedance measurement [Ω]	0.001	0.001	0.01	0.01	0.01	0.01
Measurement voltages [V]	95...440	95...440	95...440	95...440	180...460	180...460
Resolution of fault loop impedance measurement without RCD tripping [Ω]	0,01	0,01	0,01	0,01	0.01	0,01
Calculation of fault current according to rated voltage	✓	✓	✓	✓	✓	✓
Calculation of fault current according to measured voltage	✓	✓	✓	✓	✓	–
Automatic measurement in socket	✓	✓	✓	✓	✓	✓
<b>Residual current device measurements</b>	AC, A, F, B, B+, EV [ ] [G] [S]	AC, A, F, B, B+ [ ] [G] [S]	AC, A, F, B, B+ [ ] [G] [S]	AC, A, F, B, B+ [ ] [G] [S]	AC, A [ ] [G] [S]	AC, A [ ] [G] [S]
Automatic measurement of the full set of RCD parameters - RCD Auto	✓	✓	✓	✓	✓	✓
Measurement of tripping current $I_{\Delta}$ with rising current	10, 30, 100, 300, 500, 1000	10, 30, 100, 300, 500, 1000	10, 30, 100, 300, 500, 1000	10, 30, 100, 300, 500, 1000	10, 15, 30, 100, 300, 500	10, 30, 100, 300, 500
Simultaneous measurement of $I_{\Delta}$ and $t_{\Delta}$ in one RCD trip	✓	✓	✓	✓	✓	✓
Measurement of tripping time for factor of rated current	$1/2$ , 1, 2, 5	$1/2$ , 1, 2, 5	$1/2$ , 1, 2, 5	$1/2$ , 1, 2, 5	$1/2$ , 1, 2, 5	$1/2$ , 1, 2, 5
Measurement of touch voltage $U_B$	✓	✓	✓	✓	✓	✓
Detection of L and N swapping	✓	✓	✓	✓	✓	✓
<b>Measurement of insulation resistance</b>	✓	✓	✓	✓	✓	–
Measurement voltages [V]	<b>MPI-536</b>   10 50, 100, 250, 500, 1000 <b>MPI-536</b>   1500, 2500	50, 100, 250, 500, 1000	50, 100, 250, 500, 1000, 2500	50, 100, 250, 500, 1000	100, 250, 500	–
Measuring range [Ω]	5G / 5G / 10G / 5G	10G	10G	3G	600M	–
Protection against appearance of voltage	✓	✓	✓	✓	✓	–
Automatic discharging of object after measurement	✓	✓	✓	✓	✓	–
Automatic measurement of multi-core cords with AutoISO-1000C adapter	✓ / ✓ / – / ✓	✓	✓	✓	–	–
Automatic measurement of multi-core cables with AutoISO-2500 adapter	– / – / ✓ / –	–	✓	–	–	–
Sound signalling of time intervals for characteristics	✓	✓	✓	✓	–	–
Calculation of absorption coefficients	– / – / ✓ / –	–	✓	–	–	–
<b>Continuity testing with current <math>\geq 200</math>mA</b>	✓	✓	✓	✓	✓	✓
<b>Low-voltage resistance measurement</b>	✓	✓	✓	✓	✓	✓
<b>Earth resistance measurement</b>	3p, 4p, 3p+clamps, double-clamp	3p, 4p, 3p+clamps, double-clamp	3p	3p	3p / –	–
<b>Capability of setting limit for every function</b>	✓	✓	–	–	–	–
<b>Quick check of PE connection</b>	✓	✓	✓	✓	✓	✓
<b>Voltage measurement [V]</b>	0...500	0...500	0...500	0...500	0...500	0...500
<b>Frequency measurement [Hz]</b>	✓	✓	✓	✓	✓	✓
<b>Alternating current measurement [A]</b>	optionally 0...3000	optionally 0...3000	–	optionally 0...400	–	–
<b>Power and <math>\cos\varphi</math> measurement</b>	✓ / ✓ / – / –	✓	–	✓	–	–
<b>Measurement of U harmonics: I up to the 40th</b>	✓ / ✓ / – / –	✓	–	–	–	–
<b>THD measurement for U and I</b>	✓ / ✓ / – / –	✓	–	–	–	–
<b>Phase sequence check [V]</b>	95...500	95...500	95...500	95...500	100...440	–
<b>Memory (records)</b>	100 000	10 000 for every measurement type	990	990	990	990
<b>Power supply</b>	rechargeable battery	rechargeable battery / batteries	rechargeable battery / batteries	batteries / rechargeable battery	batteries / rechargeable batteries	batteries / rechargeable batteries
<b>Built-in quick charger</b>	✓	✓	✓	✓	–	–
<b>Data transmission</b>	USB, Bluetooth, Wi-Fi	USB, Bluetooth	USB	USB	Bluetooth	Bluetooth
<b>Dimensions [mm]</b>	288 x 223 x 75	288 x 223 x 75	288 x 223 x 75	288 x 223 x 75	220x102x61	220x102x61
<b>Weight [kg]</b>	2.5	2.2	2.2	2.2	0.8	0.8



## SONEL MPI-540 / MPI-540-PV

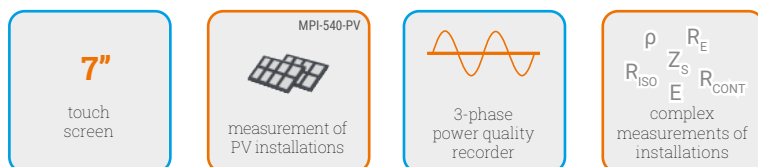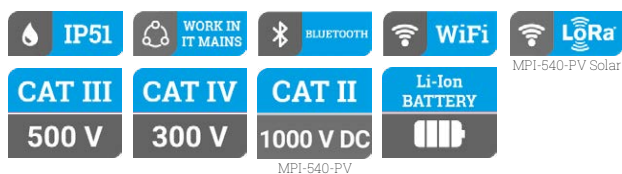

### Features

- » The largest touch screen on the market (7") – remarkable ergonomics and ease of use
- » Removable microSD memory card – easy increase of memory capacity
- » Li-Ion battery – longer operation of the meter
- » MPI-540-PV | Measurement of photovoltaic installations according to EN 62446 standard
- » MPI-540-PV | Cooperation with solar radiation and temperature meter
- » MPI-540-PV | Photovoltaic installation test report with **Soneil Reports Plus** software
- » Three-phase power recorder – advanced power quality diagnostics
- » Real time display of network parameters – immediate evaluation of the test site conditions
- » Parameters measured in accordance to class S of EN 61000-4-30 standard – high accuracy of measurements
- » Energy cost calculator – quick evaluation of potential savings
- » Measurement of all parameters related to earthing and protection against electric shock – one device instead of several
- » Quick measurement of the fault loop impedance in networks secured with RCD without triggering (up to several seconds) – time saver
- » Auto measurements – the ability to perform automatic measurements in sequence – simplified measurements
- » Fast path from measurements to report – time saver

### Choose the best set for your needs

#### MPI-540-PV Solar

Multi-function meter of electrical and PV system parameters **with flexible coils, IRM-1 meter with accessories and backpack**  
index: WMGBMPI540PVIRM1

#### MPI-540-PV

Multi-function meter of electrical and PV system parameters **with flexible coils**  
index: WMGBMPI540PV

#### MPI-540-PV Start

Multi-function meter of electrical and PV system parameters **without flexible coils**  
index: WMGBMPI540PVNC

#### MPI-540

Multi-function meter of electrical system parameters **with flexible coils**  
index: WMGBMPI540

#### MPI-540 Start

Multi-function meter of electrical system parameters **without flexible coils**  
index: WMGBMPI540NC

### Capabilities

The meter has **above-average functionality**. It combines the measuring capabilities of several devices, while ensuring equally good accuracy.

- » The **MPI-540-PV** instrument can measure photovoltaic installations in accordance with the EN 62446 standard:
  - continuity of protective and equipotential bondings,
  - earth resistance,
  - insulation resistance on the DC side,
  - open circuit voltage  $U_{oc}$ ,
  - short circuit current  $I_{sc}$ ,
  - work currents and powers on both DC and AC side,
  - inverter efficiency.
- » **MPI-540 / MPI-540-PV** can record 50/60 Hz power quality parameters in accordance to S class of EN 61000-4-30:
  - voltage L1, L2, L3, – average values in the range up to 500 V,
  - L1, L2, L3 currents, – average values, current measurement in the range up to 3 kA (depending on the current probes used),
  - frequency in the range of 40 Hz – 70 Hz,
  - active (P), reactive (Q) and apparent (S) power,
  - power factor (PF),  $\cos\phi$ ,
  - harmonics (up to 40th for voltage and current),
  - total harmonic distortion (THD) for current and voltage.
- » **MPI-540 / MPI-540-PV** can be used for all measurements for commissioning of electrical installations in accordance with applicable regulations:
  - short circuit loop impedance (also in circuits secured with RCDs),
  - RCD parameters,
  - insulation resistance,
  - earth resistance (4 measurement methods + soil resistivity measurement),
  - continuity of protective and equipotential bondings,
  - light intensity measurement,
  - phase sequence test,
  - motor rotation direction test.





### Automatic installation safety test

MPI-540 / MPI-540-PV allow safety control of **residential, commercial and industrial electrical installations**. Measurements can be easily automated with:

- » auto mode of residual current devices (RCD) tests,
- » auto measurements – freely configurable measuring sequences,
- » AutoISO-1000C adapter for automatic insulation resistance test of 3-, 4- and 5-conductor cables, without switching.

### Photovoltaics under supervision

**MPI-540-PV** is an extremely universal meter, designed in particular for testing photovoltaic installations. The device allows a complete set of tests on the DC and AC side – in accordance with the guidelines of EN 62446 standard.

Measuring parameters related to the photovoltaic installation, the instrument will automatically convert them to the STC (Standard Test Conditions) reference conditions. Measurements of voltage, current and power on the AC and DC side of the inverter allow to verify its efficiency. **Sonel Reports Plus** software enables creating PV installation test report with measurement results saved meter's in memory..

### Three-phase power quality recorder

The device has a three-phase power quality recorder with the LIVE mode view and the possibility to register electrical network parameters such as voltage, current, power, harmonics and THD. The meter enables reading of selected parameters and their graphic presentation on the screen in real time. These parameters are measured and displayed concurrently with the recording on the memory card. In the LIVE mode, the user can see:

- » voltage and current waveforms (oscilloscope),
- » voltage and current timeplots,
- » a phasor graph,
- » display of multiple parameters in tabular form,
- » spectrum graph of current and voltage harmonics.

### Fault loop impedance measurements:

- » impedance measurement with 23 A current (40 A for phase-to-phase voltage), max. resolution 0.001  $\Omega$ ,
- » fault current-limiting resistor: 10  $\Omega$ ,
- » range of measurement voltages: 95...440 V, frequencies 45...65 Hz,
- » **fast fault loop impedance measurement with resolution up to 0.01  $\Omega$  in systems protected with RCDs not tripping at  $I_{\Delta n} \geq 30$  mA,**
- » automatic calculation of fault current on the basis of nominal or measured voltage; differentiation of phase-to-neutral and phase-to-phase voltage,
- » measurements using UNI-Schuko plug with measurement triggering button (including case with swapped L and N leads) or 1.2 m, 5 m, 10 m, 20 m test leads, with optional use of three-phase socket adapters (AGT),
- » selection of installation protections and automatic evaluation of measurement results.

### Testing of AC, A, F, B, B+ and EV residual current devices:

- » **MPI-540 / MPI-540-PV also enables measurements in IT networks,**
- » measurement of general, short-time delay and selective RCDs with rated residual currents of 10, 30, 100, 300, 500 and 1000 mA,
- » function of automatic measurement of all RCD parameters (after pressing the "START" button once, the meter performs the entire defined cycle of measurements, including the capability of earth fault loop impedance measurement with 15 mA current),
- » shape of the input leakage current selected by the user: sinusoidal (start from rising or falling edge), unidirectional pulsating (positive or negative), unidirectional pulsating with direct current offset (positive or negative), constant (positive or negative),
- » measurement of tripping current  $I_A$  with rising current,
- » measurement of tripping time  $t_A$  with currents  $0.5 I_{\Delta n}$ ,  $1 I_{\Delta n}$ ,  $2 I_{\Delta n}$  and  $5 I_{\Delta n}$ ,
- » measurement of touch voltage  $U_B$  and protective conductor resistance  $R_E$  without tripping the RCD,
- » detection of L and N phase swapping in a socket; does not affect measurements,
- » capability of measuring tripping current  $I_A$  as well as actual tripping time  $t_A$  with just one RCD trip,
- » voltage measurements within the range of 95...270 V.

### Insulation resistance measurement:

- » measurement voltages: 50 V, 100 V, 250 V, 500 V, 1000 V,
- » measurement of insulation resistance up to 10 G $\Omega$ ,
- » capability measurement in-socket by means of UNI-Schuko adapter,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » meter protected against the presence of voltage on the object and the appearance of voltage during measurement,
- » automatic discharge of the measured object's capacitance after completion of measurement,
- » **automatic measurement of all resistance combinations of 3-, 4- and 5-core cords by means of the optional AutoISO-1000C adapter.**

### Earth resistance measurements:

- » according to 3- or 4-lead technical method with 2 auxiliary electrodes,
- » according to 3-lead method with additional clamp,
- » **according to double-clamp method,**
- » internal power source with frequency appropriate for 50 Hz or 60 Hz power network.

### Soil resistivity measurements according to the Wenner method:

- » measuring range: 0.5  $\Omega$ m...9.99 k $\Omega$ m,
- » distances between electrodes can be set in meters (1...30 m) or feet (1...90 ft).

### Low-voltage continuity testing of protective conductors and equipotential bonding:

- » measuring range according to EN 61557-4: 0.12...400  $\Omega$ , max. resolution 0.01  $\Omega$ ,
- » measurement of protective conductor continuity with current  $\geq 200$  mA in two directions,
- » low-current measurement with sound signaling,
- » voltage on open terminals: 4...9 V,
- » automatic calibration of test leads - leads of any length can be used.

### Illuminance measurement:

- » display range: 0.001/0.01/0.1 lx...399.9 klx,
- » measurement in lux (lx) or foot-candles (fc),
- » measurement by means of external photodetectors (optional)

### Additional functions of the meter:

- » real time display of network parameters,
- » autotests - pre-programmed measurement sequences,
- » quick check of correct connection of PE conductor by means of contact electrode,
- » check of phase sequence and direction of motor rotation,
- » tree-like memory structure with dynamic management
- » data transmission to PC via USB or Bluetooth®,
- » replaceable microSD memory card,
- » power supply from rechargeable battery, built-in quick charger,
- » capability of charging from the power grid or 12 V car lighter socket.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply ..... Li-Ion battery 11.1 V 3.4 Ah 37.7 Wh
- » operating temperature range ..... 0...+50°C



Choose the best set for your needs

F-3A flexible coils

IRM-1 meter  
with accessories

L-19 backpack



**MPI-540-PV Solar**  
includes flexible coils, IRM-1  
meter with accessories and  
backpack




**MPI-540-PV**  
includes flexible coils



**MPI-540-PV Start**  
does not include flexible coils



**MPI-540**  
includes flexible coils



**MPI-540 Start**  
does not include flexible coils





## Standard accessories:

		MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start
		WMGBMPI540PVIRM1	WMGBMPI540PV	WMGBMPI540PVNC	WMGBMPI540	WMGBMPI540NC
IRM-1 solar radiation and temperature meter	WMGBIRM1	✓				
IRM-1 mounting&measuring set	WASONTPVCKPL	✓				
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24	✓				
LORA-S1 USB adapter for data transmission	WAADAUSBLORA	✓				
PVM-1 adapter	WAADAPVM1	✓	✓	✓		
C-PV clamp	WACEGCPVOKR	✓	✓	✓		
Adapter for C-PV clamp	WAADACPV	✓	✓	✓		
MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4	✓	✓	✓		
Backpack L19	WAFUTL19	✓				
Carrying case M13	WAFUTM13		✓	✓		
F-3A flexible coil (Ø120 mm)	WACEGF3AOKR	✓	✓		✓	
WS-03 adapter with START button with UNI-Schuko plug	WAADAWS03	✓	✓	✓	✓	✓
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	✓	✓	✓	✓	✓
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB	✓	✓	✓	✓	✓
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB	✓	✓	✓	✓	✓
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBBN	✓	✓	✓	✓	✓
Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ	✓	✓	✓	✓	✓
Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ	✓	✓	✓	✓	✓
USB cable	WAPRZUSB	✓	✓	✓	✓	✓
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	✓	✓	✓	✓	✓
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	✓	✓	✓	✓	✓
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02	✓	✓	✓	✓	✓
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01	✓	✓	✓	✓	✓
Pin probe, red 1 kV (banana socket)	WASONREOGB1	✓	✓	✓	✓	✓
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1	✓	✓	✓	✓	✓
Pin probe, yellow 1 kV (banana socket)	WASONYEGB1	✓	✓	✓	✓	✓
2x earth contact test probe (rod), 30 cm	WASONG30	✓	✓	✓	✓	✓
Voltage adapter with M4/M6 thread (5 pcs.)	WAADAM4M6	✓	✓	✓	✓	✓
Z7 power supply	WAZASZ7	✓	✓	✓	✓	✓
230 V mains cable (IEC C7 plug)	WAPRZLAD230	✓	✓	✓	✓	✓
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM	✓	✓	✓	✓	✓
L2 carrying case	WAFUTL2		✓	✓	✓	✓
L2 hanging straps (set)	WAPZSZEKPL	✓	✓	✓	✓	✓
Li-Ion battery 11.1 V 3.4 Ah	WAAKU15	✓	✓	✓	✓	✓
MicroSD card		✓	✓	✓	✓	✓
Touchscreen pen	WAPZTPEN	✓	✓	✓	✓	✓
Factory calibration certificate		✓	✓	✓	✓	✓



Solar radiation and temperature meter

## SONEL IRM-1

index: WMGBIRM1

### Features

- » Measurement of solar radiation and temperature.
- » The LoRa interface for communication with the meter - offers a larger range than the Bluetooth technology!
- » Automatic data synchronization with the meter.
- » Built-in compass and inclination sensor.
- » Built-in recorder that can be used to record solar radiation before constructing PV systems, as well as to measure the shading of existing systems.
- » Large measurement memory: 999 cache memory cells and 5000 recorder records available (one-time recording) with the option of overwriting them (continuous recording).

### Measured parameters

- » Solar radiation intensity (irradiance) in W/m<sup>2</sup> or BTU/ft<sup>2</sup>h.
- » PV panel temperature in °C or °F.
- » Ambient temperature in °C or °F.
- » Inclination angle of panels
- » Orientation of the panels with the built-in compass.

For more information see page 44.

## Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$ in 23/40 A mode

Measurement with 23/40 A current - measuring range according to EN 61557: 0.130 ...1999  $\Omega$  (for 1.2 m test lead):

Display range	Resolution	Accuracy
0.00...19.999 $\Omega$	0.001 $\Omega$	$\pm(5\% \text{ m.v.} + 0.03 \text{ } \Omega)$
20.00...199.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 0.3 \text{ } \Omega)$
200.00...1999.9 $\Omega$	0.1 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \text{ } \Omega)$

- » Nominal voltage: 95...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 95...440 V (for  $Z_{L-L}$  - only mode 23/40 A). Frequency: 45...65 Hz.

## Measurement of the $Z_{L-PE}$ fault loop impedance in the RCD mode

Measurement with 15 mA current - measuring range according to EN 61557: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.00...199.99 $\Omega$	0.1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$
200...1999 $\Omega$	1 $\Omega$	

- » Nominal voltage: 95...270 V
- » Frequency: 45...65 Hz

## Earthing resistance measurement with two clamps

Display range	Resolution	Accuracy
0.00...9.99 Ω	0.01 Ω	±(10% m.v. + 4 digits)
10.0...19.9 Ω	0.1 Ω	
20.0...99.9 Ω		±(20% m.v. + 4 digits)

## Measurement of insulation resistance

Measuring range according to EN 61557-2:

- » for  $U_n = 50 \text{ V}$ : 50 k $\Omega$ ...250 M $\Omega$
- » for  $U_n = 100 \text{ V}$ : 100 k $\Omega$ ...500 M $\Omega$
- » for  $U_n = 250 \text{ V}$ : 250 k $\Omega$ ...99 M $\Omega$
- » for  $U_n = 500 \text{ V}$ : 500 k $\Omega$ ...2 G $\Omega$
- » for  $U_n = 1000 \text{ V}$ : 1000 M $\Omega$ ...9.99 G $\Omega$

Display range	Resolution	Accuracy
0...1999 kΩ	1 kΩ	±(3% m.v. + 8 digits)
2.00...19.99 MΩ	0.01 MΩ	
20.0...199.9 MΩ		
200...999 MΩ	1 MΩ	±(4% m.v. + 6 digits)
1.00...4.99 GΩ	0.01 GΩ	
5...9.99 GΩ	0.01 GΩ	(non-specified)

## Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant, display of phase-to-phase voltages
- »  $U_{L-L}$  power system voltage range: 95...500 V (45...65 Hz)

## AC current measurement (True RMS) with clamp

Clamp	Display range	Resolution	Accuracy
F-1A, F-2A, F-3A	0...3000 A (10 kA <sub>pp</sub> @ 50Hz)	0.01% $I_{nom}$	$\pm 0.1\%$
C-4A	0...1000 A (3600 A <sub>pp</sub> )	0.01% $I_{nom}$	0.1...10 A: $\pm(3\% + 0.1 \text{ A})$ 10 A: $\pm 3\%$ 50 A: $\pm 1.5\%$ 200 A: $\pm 0.75\%$ 1000...1200 A: $\pm 0.5\%$
C-5A	0...1000 A (3600 A <sub>pp</sub> )	0.01% $I_{nom}$	0.5...100 A: $\leq(1.5\% + 1 \text{ A})$ 100...800 A: $\leq 2.5\%$ 800...1000 A AC: $\leq 4\%$ 800...1400 A DC: $\leq 4\%$
C-6A	0...10 A (36 A <sub>pp</sub> )	0.01% $I_{nom}$	0.01...0.1 A: $\pm(3\% + 1 \text{ mA})$ 0.1...1 A: $\pm 2.5\%$ 1...12 A: $\pm 1\%$
C-7A	0...100 A (360 A <sub>pp</sub> )	0.01% $I_{nom}$	0...100 A: $\pm(0.5\% + 0.02 \text{ A})$ (45...65 Hz) 0...100 A: $\pm(1.0\% + 0.04 \text{ A})$ (40...1000 Hz)

## Illuminance measurement\*

Display range [lx]	Resolution [lx]	Spectral uncertainty	Accuracy
0...3.999	0.001	f1 < 2%	$\pm(2\% \text{ m.v.} + 5 \text{ digits})$
4.00...39.99	0.01		
40.0...399.9	0.1		
400...3999	1		
4.00 k...39.99 k	0.01 k		
40.0 k...399.9 k	0.1 k		

\*) for the LP-10A measuring probe

## Measurements of RCD parameters (working voltage range 95...270V):

RCD trip test and measurement of tripping time  $t_A$  (for  $t_A$  measurement function)

RCD type	Factor	Range	Resolution	Accuracy
• General • Short-time delay • AC module in EV type	0.5 $I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$  for RCD of $I_{\Delta n} = 10 \text{ mA}$ of the measurement with 0.5 $I_{\Delta n}$ accuracy: $\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	1 $I_{\Delta n}$			
	2 $I_{\Delta n}$	0...150 ms		
	5 $I_{\Delta n}$	0...40 ms		
Selective	0.5 $I_{\Delta n}$	0...500 ms	0.1 s	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	1 $I_{\Delta n}$			
	2 $I_{\Delta n}$	0...200 ms		
	5 $I_{\Delta n}$	0...150 ms		
• EV 6 mA DC • RCM	1 $I_{\Delta n}$	0.0...10.0 s	1 ms	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	10 $I_{\Delta n}$	0...300 ms		
	33 $I_{\Delta n}$	0...100 ms		
	50 $I_{\Delta n}$	0...40 ms		

- » Residual current input accuracy: for 0.5  $I_{\Delta n}$  ..... 8...0%  
for 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$ , 5  $I_{\Delta n}$  ..... 0...8%

## Measurement of RCD trip current $I_A$ for sinusoidal residual current (AC type)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.0...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	± 5% I <sub>Δn</sub>
30 mA	9.0...30.0 mA			
100 mA	30...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			
1000 mA	300...1000 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

## Measurement of RCD trip current $I_A$ for uni-directional residual current and uni-directional current with 6 mA direct current offset (type A)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	0.35 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	10.5...42.0 mA		0.35 I <sub>Δn</sub> ...1.4 I <sub>Δn</sub>	
100 mA	35...140 mA			
300 mA	105...420 mA			
500 mA	175...700 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

## Measurement of RCD trip current $I_A$ for residual direct current (type B)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
6 mA	1.0...6.0 mA	0.1 mA	1.0...6.0 mA	± 6% I <sub>Δn</sub>
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			
500 mA	100...1000 mA			

- » Measurement is possible for positive or negative input leakage current
- »  $I_{\Delta n}$  - nominal value of residual current

## Measurement of $R_E$ earth resistance using 3-lead, 4-lead, or 3-lead + clamp technical method

Measuring range according to EN 61557-5: 0.50  $\Omega$ ...1.99 k $\Omega$  for  $U = 50 \text{ V}$  (3-lead, 4-lead):

Display range	Resolution	Accuracy 3p, 4p	Accuracy 3-lead with clamp
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 4 \text{ digits})$	$\pm(8\% \text{ m.v.} + 4 \text{ digits})$
10.0...99.9 $\Omega$	0.1 $\Omega$		
100...999 $\Omega$	1 $\Omega$		
1.00...1.99 k $\Omega$	0.01 k $\Omega$		

"m.v." = "measured value"

## The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)
- » EN 12464 (lighting workplaces)
- » EN 62446 (testing of PV panels) (MPI-540-PV only)

### Three-phase power network data logger

#### » Measured parameters:

- voltages L1, L2, L3, N (four measurement inputs), minimum and maximum values within the range up to 550 V, interoperability with voltage transformers,
- currents L1, L2, L3 (three measurement inputs), average, minimum and maximum values, current measurement within the range up to 3 kA (depends on used clamps), interoperability with current transformers,
- frequency within the range of 40 Hz...70 Hz,
- active power (P), reactive power (Q), apparent power (S), inactive power  $S_n$
- power registration: IEEE 1459,
- active energy ( $E_p$ ), reactive energy ( $E_Q$ ), apparent energy ( $E_S$ ),
- power factor (PF),  $\cos\phi$ ,
- harmonics up to the 40<sup>th</sup> in voltage and current, total harmonic distortion THD for current and voltage,
- unbalance of voltages (in compliance with IEC 61000-4-30 class S) and currents,
- energy cost calculator,
- energy losses calculator.

#### » The instrument is intended for operation in networks:

- with rated frequency 50/60 Hz,
- with rated voltages: 64/110 V; 110/190 V; 115/200 V; 127/220 V; 220/380 V; 230/400 V; 240/415 V; 254/440 V; 290/500 V,
- with direct current.

#### » Supported network configurations:

- single-phase,
- two-phase with common N,
- three-phase - star with and without N conductor,
- three-phase - delta.



MPI-540 / MPI-540-PV meter enables estimation of power losses and related costs of poor power quality, through built-in energy loss calculator.

### Recorder parameters

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	—	0.0...500 V	0.01% $U_{nom}$	$\pm 0.5\% U_{nom}$
Alternating voltage TRMS	—	depending on clamp*	0.01% $I_{nom}$	$\pm 2\% m.v.$ if $m.v. \geq 10\% I_{nom}$ $\pm 2\% I_{nom}$ if $m.v. < 10\% I_{nom}$ error does not account for clamp error)
Frequency	—	40.00...70.00 Hz	0.01 Hz	$\pm 0.05$ Hz
Active, reactive, apparent and distortion power	—	depending on configuration (instrument transformers, clamp)	up to four places after the decimal point	depending on configuration (instrument transformers, clamp)
Active, reactive apparent energy	—	depending on configuration (instrument transformers, clamp)	up to four places after the decimal point	as power error
$\cos\phi$ and power factor (PF)	—	0.00...1.00	0.01	$\pm 0.03$
Harmonics	Voltage	as for alternating voltage True RMS	as for alternating voltage True RMS	$\pm 5\% m.v.$ if $m.v. \geq 3\% U_{nom}$ $\pm 0.15\% U_{nom}$ if $m.v. < 3\% U_{nom}$
	Current	as for alternating voltage True RMS	as for alternating voltage True RMS	$\pm 5\% m.v.$ if $m.v. \geq 10\% I_{nom}$ $\pm 0.5\% I_{nom}$ if $m.v. < 10\% I_{nom}$
THD	Voltage	0.0...100.0% (relative to RMS value)	0.1%	$\pm 5\%$
	Current			
Unbalance factor	Voltage and current	0.0...10.0%	0.1%	$\pm 0.15\%$ (absolute error)

\*Clamp F-1A, F-2A, F-3A: 0...3000 AAC (10 000 A<sub>pp</sub>) • Clamp C-4A: 0...1000 AAC (3600 A<sub>pp</sub>) • Clamp C-5A: 0...1000 AAC/DC (3600 A<sub>pp</sub>) • Clamp C-6A: 0...100 AAC (36 A<sub>pp</sub>) • Clamp C-7A: 0...100 AAC (360 A<sub>pp</sub>)


### MPI-540-PV | Specifications – photovoltaic installation parameters

#### Open circuit voltage $U_{oc}$ measurement


Display range	Resolution	Accuracy
0.0 V...299.9 V	0.1 V	$\pm(3\% m.v. + 5 \text{ digits})$
300 V...1000 V	1 V	$\pm(3\% m.v. + 2 \text{ digits})$

#### Short circuit current $I_{sc}$ measurement

Display range	Resolution	Accuracy
0.00 A...20.00 A	0.01 A	$\pm(3\% m.v. + 0.10 \text{ A})$

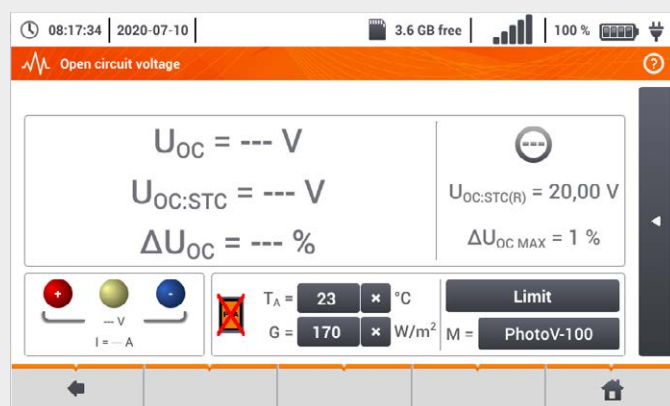


### Selected features of the Sonel MPI-540 / MPI-540-PV meter

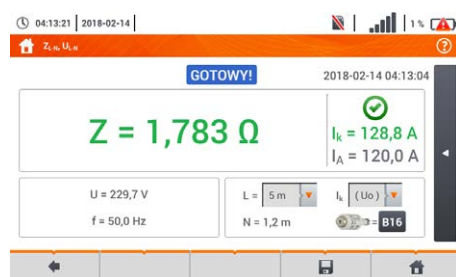

Fault loop impedance measurement



Network parameters recorder

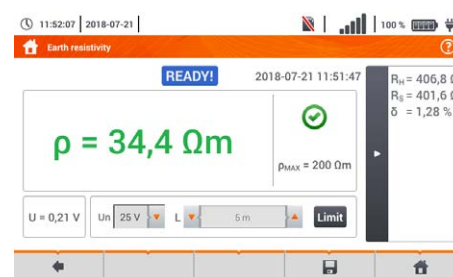

Ground resistivity measurement



## SONEL MPI-536 / MPI-535

index: WMGBMPI536 / WMGBMPI535



### Fault loop impedance measurements:

- » impedance measurement with 23 A current (40 A for phase-to-phase voltage), max. resolution 0.001 Ω,
- » fault current-limiting resistor: 10 Ω,
- » range of measurement voltages: 95...440 V, frequencies 45...65 Hz,
- » **fast fault loop impedance measurement with resolution up to 0.01 Ω in systems protected with RCDs not tripping at  $I_{\Delta n} \geq 30$  mA**,
- » automatic calculation of fault current on the basis of nominal or measured voltage; differentiation of phase-to-neutral and phase-to-phase voltage,
- » measurements using UNI-Schuko plug with measurement triggering button (including for swapped L and N leads) or 1.2 m, 5 m, 10 m, 20 m test leads, with optional use of three-phase socket adapters (AGT),
- » selection of installation protections and automatic evaluation of measurement results.

### Testing of AC, A, F, B, B+ and EV residual current devices:

- » measurement of general, short-time delay and selective RCDs with rated residual currents of 10, 30, 100, 300, 500 and 1000 mA,
- » function of automatic measurement of all RCD parameters (after pressing the "START" button once, the meter performs the entire defined cycle of measurements, including the capability of earth fault loop impedance measurement with 15 mA current),
- » shape of the input leakage current selected by the user: sinusoidal (start from rising or falling edge), unidirectional pulsating (positive or negative), unidirectional pulsating with direct current offset (positive or negative), constant (positive or negative),
- » measurement of tripping current  $I_{\Delta}$  with rising current,
- » measurement of tripping time  $t_{\Delta}$  with currents  $0.5 I_{\Delta n}$ ,  $1 I_{\Delta n}$ ,  $2 I_{\Delta n}$  and  $5 I_{\Delta n}$ ,
- » measurement of touch voltage  $U_b$  and protective conductor resistance  $R_E$  without tripping the RCD,
- » detection of L and N phase swapping in a socket; does not affect measurements,
- » capability of measuring tripping current  $I_{\Delta}$  as well as actual tripping time  $t_{\Delta}$  with just one RCD trip,
- » voltage measurements within the range of 95...270 V.

### Insulation resistance measurement:

- » measurement voltages:
  - MPI-535 | 50 V, 100 V, 250 V, 500 V, 1000 V,
  - MPI-536 | 10 V, 50 V, 100 V, 250 V, 500 V, 1000 V, 1500 V, 2500 V,
- » measurement of insulation resistance up to:
  - MPI-535 | 5 GΩ,
  - MPI-536 | 10 GΩ,
- » capability measurement in-socket by means of UNI-Schuko adapter,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » meter protected against the presence of voltage on the object and the appearance of voltage during measurement,
- » automatic discharge of the measured object's capacitance after completion of measurement,
- » **automatic measurement of all resistance combinations of 3-, 4- and 5-core cords by means of the optional adapter:**
  - MPI-535 | AutoISO-1000C,
  - MPI-536 | AutoISO-2500.

### Earth resistance measurements:

- » according to 3- or 4-lead technical method with 2 auxiliary electrodes,
- » according to 3-lead method with additional clamp,
- » according to double-clamp method,
- » internal power source with frequency appropriate for 50 Hz or 60 Hz power network.

### Standard accessories:

		MPI-536	MPI-535
WS-03 adapter with START button with UNI-Schuko plug	WAADWS03	1	1
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	1	1
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB	1	1
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB	1	1
Test lead 1.8 m, red, 5 kV (banana plugs)	WAPRZ1X8REBB	1	
Test lead 1.8 m, black, 5 kV (banana plugs)	WAPRZ1X8BLBB	1	
Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ	1	1
Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ	1	1
USB cable	WAPRZUSB	1	1
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	1	1
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	1	1
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02	1	1
Crocodile clip, black, 11 kV, 32 A	WAKROBL32K09	1	
Pin probe, red 1 kV (banana socket)	WASONREOGB1	1	1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1	1	1
Pin probe, yellow 1 kV (banana socket)	WASONYEGB1	1	1
Pin probe, red 5 kV (banana socket)	WASONYEGB2	1	
Earth contact test probe (rod), 30 cm	WASONG30	2	2
Z7 Power supply	WAZASZ7	1	1
230 V mains cable (IEC C7 plug)	WAPRZLAD230	1	1
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM	1	
L2 carrying case	WAFUTL2	1	1
L2 hanging straps (set)	WAPOZSZEKPL	1	1
Li-Ion battery 11.1 V 3.4 Ah	WAAKU15	1	1
Touchscreen pen	WAPOZTPEN	1	1
Factory calibration certificate		1	1

### Soil resistivity measurements according to the Wenner method:

- » measuring range: 0.5 Ωm...9.99 kΩm,
- » distances between electrodes can be set in meters (1...30 m) or feet (1...90 ft).

### Low-voltage continuity testing of protective conductors and equipotential bonding:

- » measuring range according to EN 61557-4: 0.12...400 Ω,
- » max. resolution 0.01 Ω,
- » measurement of protective conductor continuity with current  $\geq 200$  mA in two directions,
- » low-current measurement with sound signalling,
- » voltage on open terminals: 4...9 V,
- » automatic calibration of test leads - leads of any length can be used.

### Illuminance measurement:

- » display range: 0.001/0.01/0.1 lx...399.9 klx,
- » measurement in lux (lx) or foot-candles (fc),
- » measurement by means of external photodetectors (optional)

### Additional functions of the meter:

- » autotests - pre-programmed measurement sequences,
- » quick check of correct connection of PE conductor by means of contact electrode,
- » check of phase sequence and direction of motor rotation,
- » tree-like memory structure with dynamic management
- » data transmission to PC via USB or Bluetooth®,
- » replaceable microSD memory card,
- » power supply from rechargeable battery, built-in quick charger,
- » capability of charging from the power grid or 12 V car lighter socket.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply ..... Li-Ion rechargeable battery 11.1 V 3.4 Ah 37.7 Wh
- » operating temperature range ..... 0...+50°C

### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$ in 23/40 A mode

Measurement with 23/40 A current - measuring range according to EN 61557: 0.130 ...1999  $\Omega$  (for 1.2 m test lead):

Display range	Resolution	Accuracy
0.00...19.999 $\Omega$	0.001 $\Omega$	$\pm(5\% \text{ m.v.} + 0.03 \Omega)$
20.00...199.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 0.3 \Omega)$
200.00...1999.9 $\Omega$	0.1 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \Omega)$

- » Nominal voltage: 95...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 95...440 V (for  $Z_{L-L}$  - only mode 23/40 A). Frequency: 45...65 Hz.

### Measurement of the $Z_{L-PE}$ fault loop impedance in the RCD mode

Measurement with 15 mA current - measuring range according to EN 61557: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.00...199.99 $\Omega$	0.1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$
200...1999 $\Omega$	1 $\Omega$	

- » Nominal voltage: 95...270 V
- » Frequency: 45...65 Hz

### Earthing resistance measurement with two clamps

Display range	Resolution	Accuracy
0.00...9.99 Ω	0.01 Ω	±(10% m.v. + 4 digits)
10.0...19.9 Ω	0.1 Ω	
20.0...99.9 Ω		±(20% m.v. + 4 digits)

### Measurement of insulation resistance

Measuring range according to EN 61557-2:

- » MPI-536 | for  $U_n = 10 \text{ V}$ : 10 k $\Omega$ ...99.9 M $\Omega$
- » for  $U_n = 50 \text{ V}$ : 50 k $\Omega$ ...250 M $\Omega$
- » for  $U_n = 100 \text{ V}$ : 100 k $\Omega$ ...500 M $\Omega$
- » for  $U_n = 250 \text{ V}$ : 250 k $\Omega$ ...999 M $\Omega$
- » for  $U_n = 500 \text{ V}$ : 500 k $\Omega$ ...2.00 G $\Omega$
- » MPI-535 | for  $U_n = 1000 \text{ V}$ : 1000 k $\Omega$ ...4.99 G $\Omega$
- » MPI-536 | for  $U_n = 1000 \text{ V}$ : 1000 k $\Omega$ ...3.00 G $\Omega$
- » MPI-536 | for  $U_n = 1500 \text{ V}$ : 1500 k $\Omega$ ...5.00 G $\Omega$
- » MPI-536 | for  $U_n = 2500 \text{ V}$ : 2500 k $\Omega$ ...9.99 G $\Omega$

Display range	Resolution	Accuracy
0...1999 kΩ	1 kΩ	±(3% m.v. + 8 digits)
2.00...19.99 MΩ	0.01 MΩ	
20.0...199.9 MΩ		
200...999 MΩ	1 MΩ	
MPI-535   1.00...4.99 GΩ MPI-536   1.00...9.99 GΩ	0.01 GΩ	±(4% m.v. + 6 digits)

### Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant, display of phase-to-phase voltages
- »  $U_{L-L}$  power system voltage range: 95...500 V (45...65 Hz)

### Measurements of RCD parameters (operating voltage range 95...270 V):

RCD trip test and measurement of tripping time  $t_A$  (for  $t_A$  measurement function)

RCD type	Factor	Range	Resolution	Accuracy
• General • Short-time delay • AC module in EV type	0.5 $I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$  for RCD of $I_{\Delta n} = 10 \text{ mA}$ of the measurement with 0.5 $I_{\Delta n}$ accuracy: $\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	1 $I_{\Delta n}$	0...150 ms		
	2 $I_{\Delta n}$	0...40 ms		
Selective	0.5 $I_{\Delta n}$	0...500 ms		
	1 $I_{\Delta n}$	0...200 ms	0.1 s	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	2 $I_{\Delta n}$	0...150 ms		
• EV 6 mA DC • RCM	5 $I_{\Delta n}$	0...10.0 s		
	10 $I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
	33 $I_{\Delta n}$	0...100 ms		
	50 $I_{\Delta n}$	0...40 ms		

- » Residual current input accuracy:  
for 0.5  $I_{\Delta n}$  ..... 8...0%  
for 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$ , 5  $I_{\Delta n}$  ..... 0...8%

### Measurement of RCD trip current $I_A$ for sinusoidal residual current (AC type)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.0...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	±5% I <sub>Δn</sub>
30 mA	9.0...30.0 mA			
100 mA	30...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			
1000 mA	300...1000 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

### Measurement of RCD trip current $I_A$ for uni-directional residual current and uni-directional current with 6 mA direct current offset (type A)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	0.35 I <sub>Δn</sub> ... 2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	10.5...42.0 mA		0.35 I <sub>Δn</sub> ... 1.4 I <sub>Δn</sub>	
100 mA	35...140 mA	1 mA		
300 mA	105...420 mA			
500 mA	175...700 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

### Measurement of RCD trip current $I_A$ for residual direct current (type B)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
6 mA	1.0...6.0 mA	0.1 mA	1.0...6.0 mA	± 6% I <sub>Δn</sub>
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			
500 mA	100...1000 mA			

- » Measurement is possible for positive or negative input leakage current
- »  $I_{\Delta n}$  - nominal value of residual current

### Measurement of $R_E$ earth resistance using 3-lead, 4-lead or 3-lead + clamp technical method

Measuring range according to EN 61557-5:

0.50  $\Omega$ ...1.99 k $\Omega$  for  $U = 50 \text{ V}$  (3-lead, 4-lead):

Display range	Resolution	Accuracy 3p, 4p	Accuracy 3-lead with clamp
0.00...9.99 Ω	0.01 Ω	±(2% m.v. + 4 digits)	±(8% m.v. + 4 digits)
10.0...99.9 Ω	0.1 Ω	±(2% m.v. + 3 digits)	
100...999 Ω	1 Ω		
1.00...1.99 kΩ	0.01 kΩ		

"m.v." = "measured value"

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)
- » EN 12464 (lighting workplaces)



## SONEL MPI-530 / MPI-530-IT

index: WMGBMPI530 / WMGBMPI530IT



CAT III

600 V

CAT IV

300 V

IP54

BLUETOOTH

WORK IN IT MEANS

MPI-530-IT

### Fault loop impedance measurements:

- impedance measurement with 23 A current (40 A for phase-to-phase voltage), max. resolution 0.001 Ω,
- fault current-limiting resistor: 10 Ω,
- range of measurement voltages: 95...440 V, frequencies 45...65 Hz,
- fault loop impedance measurement with resolution up to 0.01 Ω in systems protected with RCDs not tripping at  $I_{\Delta n} \geq 30$  mA,**
- automatic calculation of fault current on the basis of nominal or measured voltage; differentiation of phase-to-neutral and phase-to-phase voltage,
- measurements using UNI-Schuko plug with measurement triggering button (including for swapped L and N leads) or 1.2 m, 5 m, 10 m or 20 m test leads, with optional use of three-phase socket adapters (AGT),
- selection of installation protections and automatic evaluation of measurement results.

### Testing of AC, A, F, B and B+ residual current devices:

- MPI-530-IT also enables measurements in IT networks,**
- measurement of general, short-time delay and selective RCDs with rated residual currents of 10, 30, 100, 300, 500 and 1000 mA,
- function of automatic measurement of all RCD parameters (after pressing the "START" button once, the meter performs the entire defined cycle of measurements, including the capability of earth fault loop impedance measurement with 15 mA current),
- shape of the input leakage current selected by the user: sinusoidal (start from rising or falling edge), unidirectional pulsating (positive or negative), unidirectional pulsating with direct current offset (positive or negative), constant (positive or negative),
- measurement of tripping current  $I_{\Delta n}$  with rising current,
- measurement of tripping time  $t_{\Delta n}$  with currents 0.5  $I_{\Delta n}$ , 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$  and 5  $I_{\Delta n}$ ,
- measurement of touch voltage  $U_b$  and protective conductor resistance  $R_E$  without tripping the RCD,
- detection of L and N phase swapping in a socket; does not affect measurements,
- capability of measuring tripping current  $I_{\Delta n}$  as well as actual tripping time  $t_{\Delta n}$  with just one RCD trip,
- voltage measurements within the range of 95...270 V.

### Insulation resistance measurement:

- measurement voltages: 50 V, 100 V, 250 V, 500 V, 1000 V,
- measurement of insulation resistance up to 10 GΩ,
- capability measurement in-socket by means of UNI-Schuko adapter,
- sound signalling of five-second time intervals, facilitating capture of time characteristics,
- meter protected against the presence of voltage on the object and the appearance of voltage during measurement,
- automatic discharge of the measured object's capacitance after completion of measurement,
- automatic measurement of all resistance combinations of 3-, 4- and 5-core cords by means of the optional AutoISO-1000C adapter**

### Earth resistance measurements:

- according to 3- or 4-lead technical method with 2 auxiliary electrodes,
- according to 3-lead method with additional clamp,
- according to double-clamp method,**
- internal power source with frequency appropriate for 50 Hz or 60 Hz power network.



## SONEL MPI MOBILE

A mobile version of the program cooperating with a multifunctional Sone! instrument: **MPI-530-IT / MPI-530** meters of electrical system parameters. It can be downloaded from **Google Play**.

### Standard accessories:

WS-03 adapter with START button with UNI-SCHUKO plug	WAADAWS03
NiMH battery 4.8 V 4.2 Ah	WAAKU07
L2 carrying case	WAFUTL2
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ
Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
2x earth contact test probe (rod), 30 cm	WASONG30
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1
L2 hanging straps (set)	WAPRZSZSEKPL
Z7 Power supply	WAZASZ7
Factory calibration certificate	

### Soil resistivity measurements according to the Wenner method:

- measuring range: 0.5 Ωm...9.99 kΩm,
- distances between electrodes can be set in meters (1...30 m) or feet (1...90 ft).

### Low-voltage continuity testing of protective conductors and equipotential bonding:

- measuring range according to EN 61557-4: 0.12...400 Ω,
- max. resolution 0.01 Ω,
- measurement of protective conductor continuity with current  $\geq 200$  mA in two directions,
- low-current measurement with sound signaling,
- voltage on open terminals: 4...9 V,
- automatic calibration of test leads - leads of any length can be used.

### Illuminance measurement:

- display range: 0.001/0.01/1 lx...399.9 klx,
- measurement in lux (lx) or foot-candles (fc),
- measurement by means of external photodetectors (optional).

### Additional functions of the meter:

- Analysis and registration of single-phase network parameters (U, I, cosφ, P, PF, Q, S, Sn),
- THD of voltage and current harmonics up to the 40th,
- Quick check of correct connection of PE conductor by means of contact electrode,
- Check of phase sequence and direction of motor rotation,
- Power supply from rechargeable battery or batteries (optional), built-in quick charger,
- Capability of charging from the power grid or 12 V car lighter socket,
- Tree-structure memory with dynamic management (max. 10,000 entries for each type of measurement),
- Data transmission to PC via USB or Bluetooth®.

### Other technical specifications:

- type of insulation ..... double, as per EN 61010-1 and EN 61557
- power supply of the meter ..... Ni-MH rechargeable battery
- ..... LR14 alkaline batteries (4 pcs.) (optional)
- operating temperature range ..... 0...+50°C



## Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$ in 23/40A mode

Measurement with 23/40 A current - measuring range according to EN 61557: 0.130 ...1999  $\Omega$  (for 1.2 m lead):

Display range	Resolution	Accuracy
0.00...19.999 $\Omega$	0.001 $\Omega$	$\pm(5\% \text{ m.v.} + 0.03 \Omega)$
20.00...199.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 0.3 \Omega)$
200.0...1999.9 $\Omega$	0.1 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \Omega)$

- » Nominal voltage: 95...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 95...440 V (for  $Z_{L-L}$  - only mode 23/40 A). Frequency: 45...65 Hz.

## Measurement of the $Z_{L-PE}$ fault loop impedance in the RCD mode

Measurement with 15 mA current - measuring range acc. to EN 61557: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.00...199.9 $\Omega$	0.1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$
200...1999 $\Omega$	1 $\Omega$	

- » Rated voltage: 95...270 V; frequency: 45...65 Hz

## Earthing resistance measurement with two clamps

Display range	Resolution	Accuracy
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(10\% \text{ m.v.} + 4 \text{ digits})$
10.0...19.9 $\Omega$	0.1 $\Omega$	
20.0...99.9 $\Omega$	0.1 $\Omega$	$\pm(20\% \text{ m.v.} + 4 \text{ digits})$

## Measurement of insulation resistance

Measuring range according to EN 61557-2:

- » for  $U_n = 50 \text{ V}$ : 50 k $\Omega$ ...250 M $\Omega$
- » for  $U_n = 100 \text{ V}$ : 100 k $\Omega$ ...500 M $\Omega$
- » for  $U_n = 250 \text{ V}$ : 250 k $\Omega$ ...99 M $\Omega$
- » for  $U_n = 500 \text{ V}$ : 500 k $\Omega$ ...2 G $\Omega$
- » for  $U_n = 1000 \text{ V}$ : 1000 M $\Omega$ ...9.99 G $\Omega$

Display range	Resolution	Accuracy
0...1999 kΩ	1 kΩ	±(3% m.v. + 8 digits)
2.00...19.99 MΩ	0.01 MΩ	
20.0...199.9 MΩ		
200...999 MΩ	1 MΩ	
1.00...9.99 GΩ	0.01 GΩ	±(4% m.v. + 6 digits)

## Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant, display of phase-to-phase voltages
- »  $U_{L-L}$  power system voltage range: 95...500 V (45...65 Hz)

## Analysis and recording of single-phase system

- » Measurement of voltage  $U_{L-N}$ : 0...500 V, power measurement P, Q, S: 0...1.5 M (W, var, VA).
- » Frequency range of measured voltages: 45...65 Hz.
- » Frequency measurement within range 45.0...65.0 Hz for voltages 50...500 V (Accuracy within a maximum of  $\pm 0.1\% \text{ m.v.} + 1 \text{ digit}$ ).
- »  $\cos\phi$  measurement: 0.00...1.00 (resolution 0.01).
- » Measurement of current and voltage harmonics (up to the 40th).
- » THD measurement relative to first harmonic (for U and I).
- » AC current measurement (True RMS) with clamp:

Clamp	Display range	Resolution	Accuracy
C-3, C-6	0.0...99.9 mA	0.1 mA	$\pm(5\% \text{ m.v.} + 3 \text{ digits})$
	100...999 mA	1 mA	
	1.00...9.99 A	0.01 A	$\pm(5\% \text{ m.v.} + 5 \text{ digits})$ (C-3, C-6)
C-3, C-6, F-2, F-3	10.0...99.9 A	0.1 A	
F-1, F-2, F-3	100...999 A	1 A	$\pm(0.1\% \text{ In} + 2 \text{ digits})$ (F-1, F-2, F-3)
	1.00...3.00 kA	0.01 kA	

## Illuminance measurement\*

Display range [lx]	Resolution [lx]	Spectral uncertainty	Accuracy
0...3.999	0.001	$f_1 < 2\%$	$\pm(2\% + 5 \text{ digits})$
4.00...39.99	0.01		
40.0...399.9	0.1		
400...3999	1		
4.00 k...39.99 k	0.01 k		
40.0 k...399.9 k	0.1 k		

\*) for LP-10A measuring probe.



MPI-530 / MPI-530-IT meters enable accurate measurement of fault loop impedance, including in L-PE loops in networks equipped with RCDs, as well as measurements in sockets with swapped L and N conductors.

## Measurements of RCD parameters (working voltage range 95...270 V):

RCD trip test and measurement of tripping time  $t_A$  (for  $t_A$  measurement function)

RCD type	Factor	Range (general and short-time delay)	Range (selective)	Resolution	Accuracy
General, short-time delay and selective	0.5 $I_{\Delta n}$	0...300 ms	0...500 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$ (for RCD of $I_{\Delta n} = 10 \text{ mA}$ and the measurement with 0.5 $I_{\Delta n}$ error: $\pm(2\% \text{ m.v.} + 3 \text{ digits})$ )
	1 $I_{\Delta n}$	0...150 ms	0...200 ms		
	5 $I_{\Delta n}$	0...40 ms	0...150 ms		

- » Residual current input accuracy: for 0.5  $I_{\Delta n}$  8...0%, for 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$ , 5  $I_{\Delta n}$  0...8%

## Measurement of RCD trip current $I_A$ for sinusoidal residual current (AC type)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.3...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	±5% I <sub>Δn</sub>
30 mA	9.0...30.0 mA			
100 mA	33...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			
1000 mA	330...1000 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

## Measurement of RCD trip current $I_A$ for uni-directional residual current and uni-directional current with 6mA direct current offset (type A)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	0.35 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	10.5...42.0 mA			
100 mA	35...140 mA			
300 mA	105...420 mA	1 mA	0.35 I <sub>Δn</sub> ...1.4 I <sub>Δn</sub>	
500 mA	175...700 mA			

- » Measurement can be started from a positive or negative half-period of the input leakage current



MPI-530 / MPI-530-IT meters enable automatic insulation resistance measurement of 3-, 4- and 5-core cords with optional AutoISO-1000C adapter.

## Measurement of RCD trip current $I_A$ for residual direct current (type B)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			
500 mA	100...1000 mA			

- » Measurement is possible for positive or negative input leakage current
- »  $I_{\Delta n}$  - nominal value of residual current

## Measurement of RE earth resistance using 3-lead, 4-lead, or 3-lead + clamp technical method

Measuring range according to EN 61557-5:

0.50  $\Omega$ ...1.99 k $\Omega$  for  $U = 50 \text{ V}$  (3-lead, 4-lead):

Display range	Resolution	Accuracy 3-lead, 4-lead	Accuracy 3-lead with clamp
0.00...9.99 Ω	0.01 Ω	±(2% m.v. + 4 digits)	±(8% m.v. + 4 digits)
10.0...99.9 Ω	0.1 Ω	±(2% m.v. + 3 digits)	
100...999 Ω	1 Ω		
1.00...1.99 kΩ	0.01 kΩ		

"m.v." = "measured value"



MPI-530 / MPI-530-IT meters enable measurement of the actual tripping time and trip current of an RCD with just one trip.

## The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)
- » EN 12464 (lighting workplaces)

## SONEL MPI-525

index: WMGBMPI525



<b>CAT III</b>	<b>CAT IV</b>	<b>IP54</b>
<b>600 V</b>	<b>300 V</b>	

**2.5 kV**

maximum  
R<sub>SO</sub> measuring  
voltage

### Fault loop impedance measurements:

- » impedance measurement with 23 A current (40 A for phase-to-phase voltage),
- » fault current-limiting resistor: 10  $\Omega$ ,
- » range of measurement voltages: 95...440 V, frequencies 45...65 Hz,
- » **fault loop impedance measurement with resolution up to 0.01  $\Omega$  in systems protected with RCDs not tripping at  $I_{\Delta n} \geq 30$  mA,**
- » **automatic fault current calculation; differentiation of phase and phase-to-phase voltage,**
- » measurements using UNI-Schuko plug with measurement triggering button (including for swapped L and N leads) or 1.2 m, 5 m, 10 m, 20 m test leads, with optional use of three-phase socket adapters (AGT).

### Testing of AC, A, F, B and B+ residual current devices:

- » measurement of general, short-time delay and selective RCDs with rated residual currents of 10, 30, 100, 300, 500 and 1000 mA,
- » **function of automatic measurement of all RCD parameters (after pressing the "START" button once, the meter performs the entire defined cycle of measurements, including the capability of earth fault loop impedance measurement with 15 mA current),**
- » shape of the input leakage current selected by the user: sinusoidal (start from rising or falling edge), unidirectional pulsating (positive or negative), unidirectional pulsating with direct current offset (positive or negative), constant (positive or negative),
- » measurement of tripping current  $I_{\Delta}$  with rising current,
- » measurement of tripping time  $t_{\Delta}$  for currents:  $0.5I_{\Delta n}$ ,  $1I_{\Delta n}$ ,  $2I_{\Delta n}$  and  $5I_{\Delta n}$ ,
- » measurement of touch voltage  $U_b$  and protective conductor resistance  $R_e$  without tripping the RCD,
- » detection of L and N phase swapping in a socket; does not affect measurements,
- » capability of measuring tripping current  $I_{\Delta}$  as well as actual tripping time  $t_{\Delta}$  with just one RCD trip,
- » voltage measurements within the range of 95...270 V.

### Insulation resistance measurement:

- » measurement voltages: 50 V, 100 V, 250 V, 500 V, 1000 V and 2500 V,
- » measurement of insulation resistance up to 10 G $\Omega$ ,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » measurement of 2 absorption coefficients (DAR, PI or Ab1, Ab2)
- » timing of  $T_1$ ,  $T_2$ ,  $T_3$  within the range of 1...600 s,
- » meter protected against the presence of voltage on the object and the appearance of voltage during measurement,
- » automatic discharge of the measured object's capacitance after completion of measurement,
- » **automatic measurement of all resistance combinations of 3-, 4- and 5-core cords and power cords by means of the optional AutoISO-2500 adapter.**

### Earth resistance measurements:

- » measurement according to 3- or 4-lead technical method with 2 auxiliary electrodes,
- » internal power source with frequency appropriate for 50 Hz or 60 Hz power network (selected in the meter).

### Standard accessories:

WS-03 adapter with START button with UNI-SCHUKO plug	WAADAWS03
NiMH battery 4.8 V 4.2 Ah	WAAKU07
L2 carrying case	WAFUTL2
Crocodile clip, black, 11 kV, 32 A	WAKROBL32K09
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 1.8 m, black, 5 kV (banana plugs, shielded)	WAPRZ1X8BLBB
Test lead 1.8 m, red, 5 kV (banana plugs)	WAPRZ1X8REBB
Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ
Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
2x earth contact test probe (rod), 30 cm	WASONG30
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, red 5 kV (banana socket)	WASONREOGB2
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1
L2 hanging straps (set)	WAPQZSZEKPL
Z7 Power supply	WAZASZ7
Factory calibration certificate	



The MPI-525 meter is one of the few multi-function meters capable of measuring insulation resistance with 2500 V voltage.

### Low-voltage resistance measurement of protective conductors and equipotential bonding:

- » measurement of protective conductor continuity with current  $\geq 200$  mA in two directions (according to standard EN 61557-4),
- » low-current measurement with sound and light signaling,
- » automatic calibration of test leads - leads of any length can be used.

### Additional functions of the meter:

- » Quick check of correct connection of PE conductor by means of contact electrode,
- » Check of phase sequence,
- » Memory storing up to 990 records (57,500 individual results), data transmission to PC via USB,
- » Power supply from rechargeable battery or battery (optional), built-in quick charger,
- » Real-time clock (RTC) - time of measurement saved to memory.



MPI-525 enables measurements in sockets with swapped L and N conductors.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... Ni-MH battery or LR14 alkaline batteries (4 pcs. - optional)
- » operating temperature range ..... 0...+50°C

### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$

Measurement with 23 / 40 A current - measuring range according to EN 61557-3: 0.13...1999  $\Omega$  (for 1.2 m test lead):

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

- » Nominal voltage: 95...270V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 95...440 V (for  $Z_{L-L}$ )
- » Frequency: 45...65Hz

### Measurement of the $Z_{L-PE}$ fault loop impedance in the RCD mode

Measurement with 15 mA current, measuring range according to EN 61557-3: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$

- » Rated voltage: 95...270 V
- » Frequency: 45...65 Hz

### Earth resistance $R_E$ measurement

Measuring range according to EN 61557-5:

0.50  $\Omega$ ...1.99 k $\Omega$  for 50 V measurement voltage  
0.56  $\Omega$ ...1.99 k $\Omega$  for 25 V measurement voltage

Display range	Resolution	Accuracy
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 4 \text{ digits})$
10.0...99.9 $\Omega$	0.1 $\Omega$	
100...999 $\Omega$	1 $\Omega$	
1.00...1.99 k $\Omega$	0.01 k $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$

### Measurement of insulation resistance

Measuring range according to EN 61557-2:

for  $U_n = 50 \text{ V}$ : 50 k $\Omega$ ...250 M $\Omega$  for  $U_n = 500 \text{ V}$ : 500 k $\Omega$ ...2.00 G $\Omega$   
for  $U_n = 100 \text{ V}$ : 100 k $\Omega$ ...500 M $\Omega$  for  $U_n = 1000 \text{ V}$ : 1000 k $\Omega$ ...3.00 G $\Omega$   
for  $U_n = 250 \text{ V}$ : 250 k $\Omega$ ...999 M $\Omega$  for  $U_n = 2500 \text{ V}$ : 2.50 M $\Omega$ ...9.99 G $\Omega$

Display range *)	Resolution	Accuracy
0...1999 k $\Omega$	1 k $\Omega$	$\pm(3\% \text{ m.v.} + 8 \text{ digits})$
2.00...19.99 M $\Omega$	0.01 k $\Omega$	
20.0...199.9 M $\Omega$	0.1 k $\Omega$	
200...999 M $\Omega$	1 k $\Omega$	
1.00...9.99 G $\Omega$	0.01 G $\Omega$	$\pm(4\% \text{ m.v.} + 6 \text{ digits})$

\*\*) no greater than the measuring range for a given voltage.



The MPI-525 meter enables automatic insulation resistance measurement of cables and 3-, 4- and 5-core cords by means of the optional AutISO-2500 adapter.

### Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant
- »  $U_{L-L}$  power system voltage range: 95...500 V (45...65 Hz)
- » Display of phase-to-phase voltage values

### Low-voltage measurement of circuit continuity and resistance

Testing of protective conductor continuity with  $\pm 200 \text{ mA}$  current measuring range according to EN 61557-4: 0.12...400  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...400 $\Omega$	1 $\Omega$	

- » voltage on open terminals: 4...9 V
- » Output current at  $R < 2 \text{ } \Omega$ : min. 200 mA
- » Automatic calibration of test leads
- » Measurements for both current polarities



The MPI-525 meter is one of the few meters capable of accurately measuring fault loop impedance, including in L-PE loops, in networks equipped with residual current devices (measurement with 15 mA current).

### Measurements of RCD parameters (working voltage range 95...270 V):

RCD trip test and measurement of tripping time  $t_A$  (for  $t_A$  measurement function)

RCD type	Factor	Range	Resolution	Accuracy	
General and short-time delay	0.5 $I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$  (for RCD of $I_{\Delta n} = 10\text{mA}$ and the measurement 0.5 $I_{\Delta n}$ error: $\pm(2\% \text{ m.v.} + 3 \text{ digits})$ )	
	1 $I_{\Delta n}$				
	2 $I_{\Delta n}$	0...150 ms			
	5 $I_{\Delta n}$	0...40 ms			
Selective	0.5 $I_{\Delta n}$	0...500 ms			
	1 $I_{\Delta n}$				
	2 $I_{\Delta n}$	0...200 ms			
	5 $I_{\Delta n}$	0...150 ms			

- » Residual current input accuracy: for 0.5  $I_{\Delta n}$  ..... 8...0%  
for 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$ , 5  $I_{\Delta n}$  ..... 0...8%

### Measurement of RCD trip current $I_A$ for sinusoidal residual current (AC type)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.3...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	±5% I <sub>Δn</sub>
30 mA	9.0...30.0 mA			
100 mA	30...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			
1000 mA	300...1000 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

### Measurement of RCD trip current $I_A$ for uni-directional residual current and uni-directional current with 6 mA direct current offset (type A, F)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	0.35 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	10.5...42.0 mA			
100 mA	35...140 mA	1 mA	0.35 I <sub>Δn</sub> ...1.4 I <sub>Δn</sub>	
300 mA	105...420 mA			
500 mA	175...700 mA			

- » Measurement can be started from a positive or negative half-period of the input leakage current

### Measurement of RCD trip current $I_A$ for residual direct current (type B, B+)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			
500 mA	100...1000 mA			

- » Measurement is possible for both a positive or negative input leakage current
- »  $I_{\Delta n}$  - nominal value of residual current

"m.v." = "measured value"



The MPI-525 meter enables measurement of the actual tripping time and trip current of an RCD with just one trip.

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



## SONEL MPI-520



CAT III

600 V

CAT IV

300 V

IP54

### Fault loop impedance measurements:

- » impedance measurement with 23 A current (40 A for phase-to-phase voltage),
- » fault current-limiting resistor: 10  $\Omega$ ,
- » range of measurement voltages: 95...440 V, frequencies 45...65 Hz,
- » **fault loop impedance measurement with resolution up to 0.01  $\Omega$  in systems protected with RCDs not tripping at  $I_{\Delta n} \geq 30$  mA,**
- » automatic fault current calculation; differentiation of phase and phase-to-phase voltage,
- » measurements using UNI-Schuko plug with measurement triggering button (including for swapped L and N leads) or 1.2 m, 5 m, 10 m, 20 m test leads, with optional use of three-phase socket adapters (AGT).

### Testing of AC, A, F, B and B+ residual current devices:

- » measurement of general, short-time delay and selective RCDs with rated residual currents of 10, 30, 100, 300, 500 and 1000 mA,
- » function of automatic measurement of all RCD parameters (after pressing the "START" button once, the meter performs the entire defined cycle of measurements, including the capability of earth fault loop impedance measurement with 15 mA current),
- » shape of the input leakage current selected by the user: sinusoidal (start from rising or falling edge), unidirectional pulsating (positive or negative), unidirectional pulsating with direct current offset (positive or negative), constant (positive or negative),
- » measurement of tripping current  $I_{\Delta}$  with rising current,
- » measurement of tripping time  $t_{\Delta}$  for currents:  $0.5 I_{\Delta n}$ ,  $1 I_{\Delta n}$ ,  $2 I_{\Delta n}$  and  $5 I_{\Delta n}$ ,
- » measurement of touch voltage  $U_b$  and protective conductor resistance  $R_E$  without tripping the RCD,
- » detection of L and N phase swapping in a socket; does not affect measurements,
- » capability of measuring tripping current  $I_{\Delta}$  as well as actual tripping time  $t_{\Delta}$  with just one RCD trip,
- » voltage measurements within the range of 95...270 V.

### Insulation resistance measurement:

- » measurement voltages: 50 V, 100 V, 250 V, 500 V, 1000 V,
- » measurement of insulation resistance up to 3 G $\Omega$ ,
- » capability of in-socket measurement by means of UNI-Schuko adapter,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » meter protected against the presence of voltage on the object and the appearance of voltage during measurement,
- » automatic discharge of the measured object's capacitance after completion of measurement,
- » automatic measurement of all resistance combinations of 3-, 4- and 5-core cords by means of the optional AutoISO-1000C adapter.

### Earth resistance measurements:

- » measurement according to 3-lead technical method with 2 auxiliary electrodes,
- » internal power source with frequency appropriate for 50 Hz or 60 Hz power network (selected in the meter).

### Choose the best set for your needs

#### MPI-520

Multi-function meter of electrical system parameters  
index: WMGBMPI520

#### MPI-520 Start

Multi-function meter of electrical system parameters  
**without accessories for earth resistance measurement**  
index: WMGBMPI520S

### Standard accessories:

WS-03 adapter for triggering measurement (UNI-Schuko plug)	WAADAWS03
L-2 carrying case (only MPI-520)	WAFUTL2
L-4 carrying case (only MPI-520 Start)	WAFUTL4
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Battery container	WAPOJ1
Test lead with banana plugs; 1 kV; 1.2 m; red	WAPRZ1X2REBB
Test lead with banana plugs; 1 kV; 1.2 m; blue	WAPRZ1X2BUBB
Test lead with banana plugs; 1 kV; 1.2 m; yellow	WAPRZ1X2YEBB
Earthing measurement test lead with banana plugs on reel; 15 m; blue (only MPI-520)	WAPRZ015BUBBSZ
Earthing measurement test lead with banana plugs on reel; 30 m; red (only MPI-520)	WAPRZ030REBBSZ
USB data transmission cable	WAPRZUSB
2x earth contact test probe (30 cm) (only MPI-520)	WASONG30
Test probe with banana socket; 1 kV; red	WASONREOGB1
Test probe with banana socket; 1 kV; blue	WASONBUOGB1
Test probe with banana socket; 1 kV; yellow	WASONYEGB1
Meter strap (type L-2)	WAPOZSZEKPL
Factory calibration certificate	



The MPI-520 and MPI-520 Start meters enable automatic insulation resistance measurement of 3-, 4- and 5-core cords with optional AutoISO-1000C adapter.

### Low-voltage resistance measurement of protective conductors and equipotential bonding:

- » measurement of protective conductor continuity with current  $\geq 200$  mA in two directions (according to standard EN 61557-4),
- » low-current measurement with sound signaling,
- » automatic calibration of test leads - leads of any length can be used.

### Additional functions of the meters:

- » measurement of voltage, frequency and - additionally with a clamp - alternating current,  $\cos\phi$  and power (active, reactive, apparent).
- » quick check of correct connection of PE conductor by means of contact electrode.
- » check of phase sequence.
- » memory storing up to 990 records (57,500 individual results), data transmission to PC via USB,
- » power supply from batteries or rechargeable batteries (optional), built-in quick charger.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... alkaline batteries (4 pcs.)  
..... or Ni-MH rechargeable battery (optional)
- » operating temperature range ..... 0...+50°C



MPI-520 and MPI-520 Start enable measurements in sockets with swapped L and N conductors.

### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$

Measurement with 23/40 A current - measuring range according to EN 61557-3: 0.13...1999  $\Omega$  (for 1.2 m test lead):

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

- » Nominal voltage: 95...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 95...440 V (for  $Z_{L-L}$ )
- » Frequency: 45...65 Hz

### Measurement of the $Z_{L-PE}$ fault loop impedance in the RCD mode

Measurement with 15 mA current, measuring range according to EN 61557-3: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$
200...1999 $\Omega$	1 $\Omega$	

- » Rated voltage: 95...270 V
- » Frequency: 45...65 Hz

### Earth resistance $R_E$ measurement

Measuring range according to EN 61557-5:

0.50  $\Omega$ ...1.99 k $\Omega$  for 50 V measurement voltage

0.56  $\Omega$ ...1.99 k $\Omega$  for 25 V measurement voltage

Display range	Resolution	Accuracy
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 4 \text{ digits})$
10.0...99.9 $\Omega$	0.1 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
100...999 $\Omega$	1 $\Omega$	
1.00...1.99 k $\Omega$	0.01 k $\Omega$	

### Measurement of insulation resistance

Measuring range according to EN 61557-2:

for  $U_n = 50 \text{ V}$ : 50 k $\Omega$ ...250 M $\Omega$

for  $U_n = 500 \text{ V}$ : 500 k $\Omega$ ...2.00 G $\Omega$

for  $U_n = 100 \text{ V}$ : 100 k $\Omega$ ...500 M $\Omega$

for  $U_n = 1000 \text{ V}$ : 1000 k $\Omega$ ...3.00 G $\Omega$

for  $U_n = 250 \text{ V}$ : 250 k $\Omega$ ...999 k $\Omega$

Display range *	Resolution	Accuracy
0...1999 k $\Omega$	1 k $\Omega$	$\pm(3\% \text{ m.v.} + 8 \text{ digits})$
2.00...19.99 M $\Omega$	0.01 M $\Omega$	
20.0...199.9 M $\Omega$	0.1 M $\Omega$	
200...999 M $\Omega$	1 M $\Omega$	
1.00...3.00 G $\Omega$	0.01 G $\Omega$	$\pm(4\% \text{ m.v.} + 6 \text{ digits})$

\*\*) no greater than the measuring range for a given voltage.

\*\*) an additional error of  $\pm 2\%$  is present in measurements when the UNI-Schuko plug is used.

### Low-voltage measurement of circuit continuity and resistance

Testing of protective conductor continuity with  $\pm 200 \text{ mA}$  current measuring range according to EN 61557-4: 0.12...400  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...400 $\Omega$	1 $\Omega$	

- » Voltage on open terminals: 4...9 V
- » Output current at  $R < 2 \Omega$ : min. 200 mA
- » Automatic calibration of test leads
- » Measurements for both current polarities

### Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant
- »  $U_{L-L}$  power system voltage range: 95...500 V (45...65 Hz)
- » Display of phase-to-phase voltage values

### Measurement of alternating voltage and current, cos $\phi$ and power

- » Power measurement P, Q, S: 0...200k (W, var, VA).
- » Measurement of alternating current (True RMS) using clamp (0...400 A), max. resolution 0.1 mA
- » Measurement of voltage  $U_{L-N}$ : 0...500 V
- » Frequency range of measured voltages: 45.0...65.0 Hz
- » Frequency measurement for voltages 50...500 V within the range of 45.0...65.0 Hz (Accuracy to a maximum of  $\pm 0.1\% \text{ m.v.} + 1 \text{ digit}$ )
- » cos $\phi$  measurement: 0.00...1.00 (resolution 0.01)

### Measurements of RCD parameters (working voltage range 95...270 V):

RCD trip test and measurement of tripping time  $t_A$  (for  $t_A$  measurement function)

RCD type	Factor	Range	Resolution	Accuracy	
General and short-time delay	0.5 I <sub>Δn</sub>	0...300 ms	1 ms	±(2% m.v. + 2 digits)  (for RCD of I <sub>Δn</sub> =10 mA and the measurement 0.5 I <sub>Δn</sub> error: ±(2% m.v. + 3 digits))	
	1 I <sub>Δn</sub>				
	2 I <sub>Δn</sub>				
5 I <sub>Δn</sub>	0...40 ms				
Selective	0.5 I <sub>Δn</sub>	0...500 ms			
	1 I <sub>Δn</sub>				
	2 I <sub>Δn</sub>				0...200 ms
	5 I <sub>Δn</sub>				0...150 ms

- » Residual current input accuracy: for 0.5  $I_{\Delta n}$  ..... 8...0%  
for 1  $I_{\Delta n}$ , 2  $I_{\Delta n}$ , 5  $I_{\Delta n}$  ..... 0...8%

### Measurement of RCD trip current $I_A$ for sinusoidal residual current (AC type)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.3...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	±5% I <sub>Δn</sub>
30 mA	9.0...30.0 mA			
100 mA	30...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			
1000 mA	300...1000 mA			

- » Measurement can be started from the positive or negative half-period of the input leakage current (AC)

### Measurement of RCD trip current $I_A$ for uni-directional residual current and uni-directional current with 6 mA direct current offset (type A, F)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	0.35 I <sub>Δn</sub> ... 2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	10.5...42.0 mA			
100 mA	35...140 mA	1 mA	0.35 I <sub>Δn</sub> ... 1.4 I <sub>Δn</sub>	
300 mA	105...420 mA			
500 mA	175...700 mA			

- » Measurement can be started from a positive or negative half-period of the input leakage current

### Measurement of RCD trip current $I_A$ for residual direct current (type B, B+)

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			
500 mA	100...1000 mA			

- » Measurement is possible for both a positive or negative input leakage current
- »  $I_{\Delta n}$  - nominal value of residual current



The MPI-520 and MPI-520 Start meters enable measurement of the actual tripping time and trip current of an RCD with just one trip.

"m.v." = "measured value"

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



The MPI-520 and MPI-520 Start meters are two of the few meters capable of accurately measuring fault loop impedance, including in L-PE loops, in networks equipped with residual current devices (measurement with 15 mA current).

## SONEL MPI-507 / MPI-506 / MPI-502F

index: WMGBMPI507 / WMGBMPI506 / WMGBMPI502F



CAT III

600 V

CAT IV

300 V

IP67

BLUETOOTH

### Measurement of short circuit loop parameters:

- » measurement of short circuit loop impedance in networks with rated voltage: 220/380 V, 230 V/400 V, 240/415 V and frequency 45...65 Hz, operating voltage range: 180...460 V
- » indication of short circuit loop resistance  $R$  and short circuit loop reactance  $X$
- » **measurements of short circuit loop impedance with 15 mA current, without tripping the RCD circuit breaker**
- » maximum test current: 7.6 A (at 230 V), 13.3 A (at 400 V).

### Testing RCD breakers of AC, A types:

- » testing of prompt, short-delay and selective RCDs with rated current values: 10 mA, 15 mA, 30 mA, 100 mA, 300 mA, 500 mA,
- » measurement of  $I_A$  trip current and tripping time  $t_A$  for currents  $0.5 I_{\Delta n}$ ,  $1 I_{\Delta n}$ ,  $2 I_{\Delta n}$ ,  $5 I_{\Delta n}$
- »  $R_E$  and  $U_0$  measurement without RCD tripping,
- » extended AUTO function of RCD measurement, with the possibility of measuring  $Z_{L-PE}$  with low current,
- » measurement of  $I_A$  and  $t_A$  during one RCD tripping.

### MPI-506 • MPI-507 | Insulation resistance measurement:

- » test voltage 100 V, 250 V, 500 V.

### MPI-507 | Earth resistance measurements:

- » measurement according to 3-lead technical method with 2 auxiliary electrodes,
- » internal power source with frequency appropriate for 50 Hz or 60 Hz power network (selected in the meter).

### Measurement of resistance of earth connection and equipotential bondings:

- » measurement of protective connections continuity with a  $\pm 200$  mA current in accordance with EN 61557-4,
- » autocalibration of test leads - any leads can be used,
- » low current resistance measurement with sound signaling.

### MPI-506 • MPI-507 | Phase sequence indication:

- » phase sequence indication: compliant, not compliant,
- » network voltage range: 100...440 V,
- » displaying the values of phase-to-phase voltages.

### Additional functions of the meter:

- » Detection of L and N phase swapping in a socket and automatic unswapping.
- » Check of correct connection of PE conductor by means of contact electrode.
- » Measurement of network voltage (0...500 V) and frequency.
- » Power supply from LR6 batteries, NiMH rechargeable batteries can optionally be applied.
- » Memory storing up to 990 results, wireless data transmission to computer.
- » Backlit keyboard.

### Standard accessories:

WS-03 adapter with START button with UNI-Schuko plug	WAADAWS03
M-6 carrying case	WAFUTM6
Red "crocodile" clip 1 kV 20 A (only MPI-506, MPI-507)	WAKRORE20K02
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02
Test lead with banana plugs; 1 kV; 1.2 m; red	WAPRZ1X2REBB
Test lead with banana plugs; 1 kV; 1.2 m; blue	WAPRZ1X2BUBB
Test lead with banana plugs; 1 kV; 1.2 m; yellow	WAPRZ1X2YEBB
Test lead 30 m, red (banana plugs, on H-frame reel) (only MPI-507)	WAPRZ030REBBN
Test lead 15 m, blue (banana plugs, on H-frame reel) (only MPI-507)	WAPRZ015BUBBN
Test probe with banana socket; 1 kV; red	WASONREOGB1
Test probe with banana socket; 1 kV; blue	WASONBUOGB1
Test probe with banana socket; 1 kV; yellow	WASONYEOGB1
2x earth contact test probe (rod), 25 cm (only MPI-507)	WASONG25
Meter strap (type M-1)	WAPOZSZE4
M-1 housing holder - hanger	WAPOZUCH1
4x LR6 1,5 V battery	
Factory calibration certificate	



### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$

Measurement with 7.6/13.3 A current - measuring range according to EN 61557-3: 0.13...1999  $\Omega$ :

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(5\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

### Measurement of earth fault loop impedance $Z_{L-PE}$ in RCD mode

Measurement with 15 mA current, measuring range according to EN 61557-3: 0.50...1999  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(6\% \text{ m.v.} + 10 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	$\pm(6\% \text{ m.v.} + 5 \text{ digits})$

### MPI-507 | Earth resistance $R_E$ measurement

Measuring range according to EN 61557-5:  
0.63  $\Omega$ ...1999  $\Omega$  for 50 V measurement voltage

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(3\% \text{ m.v.} + 5 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

### MPI-506 • MPI-507 | Insulation resistance measurement

Test range according to IEC 61557-2:

$U_{ISO} = 100 \text{ V: } 100 \text{ k}\Omega$ ...99.9  $M\Omega$       $U_{ISO} = 250 \text{ V: } 250 \text{ k}\Omega$ ...199.9  $M\Omega$

$U_{ISO} = 500 \text{ V: } 500 \text{ k}\Omega$ ...599.9  $M\Omega$

### Measurements of RCD parameters (operating voltage range 180...270 V):

RCD trip test and measurement of tripping time  $t_A$   
(for  $t_A$  measurement function)

RCD type	Factor	Range	Resolution	Accuracy		
General type	0.5 $I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$		
	1 $I_{\Delta n}$					
	2 $I_{\Delta n}$	0...150 ms				
	5 $I_{\Delta n}$	0...40 ms				
Selective	0.5 $I_{\Delta n}$	0...500 ms				
	1 $I_{\Delta n}$					
	2 $I_{\Delta n}$	0...200 ms				
	5 $I_{\Delta n}$	0...150 ms				

### Measurement of RCD trip current $I_A$ for sinusoidal residual current

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.0...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	±5% I <sub>Δn</sub>
15 mA	4.5...15.0 mA			
30 mA	9.0...30.0 mA			
100 mA	30...100 mA	1 mA		
300 mA	90...300 mA			
500 mA	150...500 mA			

- » Measurement can be started from the positive or negative half-period of the input current

### Measurement of RCD trip current $I_A$ for uni-directional pulsating residual current

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.5...20.0 mA	0.1 mA	$0.35 I_{\Delta n} \dots 2.0 I_{\Delta n}$	$\pm 10\% I_{\Delta n}$
15 mA	5.3...21.0 mA			
30 mA	10.5...42.0 mA			
100 mA	35...140 mA	1 mA		
300 mA	105...420 mA			

- » Measurement for positive or negative half-periods of the input leakage current

### Low-voltage measurement of circuit continuity and resistance

Testing of protective conductor continuity with  $\pm 200 \text{ mA}$  current  
measuring range according to EN 61557-4: 0.12...400  $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...400 $\Omega$	1 $\Omega$	

- » Voltage on open terminals: 4...20 V
- » Output current at  $R < 2 \Omega$ : min. 200 mA
- » Automatic calibration of test leads
- » Measurements for both current polarities

### MPI-506 • MPI-507 | Indication of phase sequence

- » Indication of phase sequence: compliant, non-compliant
- »  $U_{L-L}$  power system voltage range: 100...440 V (45...65 Hz)
- » Display of phase-to-phase voltage values



## SONEL EVSE-100

index: WMGBEVSE100



### Tests

- » Simulation of PP cable parameters:
  - open circuit,
  - 13 A, 20 A, 32 A, 63 A, 80 A.
- » Simulation of communication:
  - state A - vehicle not connected,
  - state B - vehicle connected, not charging,
  - state C - vehicle connected, charging without ventilation.
  - state D - vehicle connected, charging with ventilation.
- » Safety measurements:
  - measurement of short circuit loop Z,
  - measurement of parameters of RCD circuit breakers (AC, A, B, 6 mA DC),
  - measurement of insulation resistance  $R_{ISO}$ ,
  - measurement of  $R_{CONT}$ ,
  - phase sequence indication,
  - measurement of resistance of coding resistor  $R_c$ ,
  - measurements of grounding  $R_E$ .
- » EVSE analysis - diagnostics:
  - CP+, CP- voltage,
  - frequency f (PWM),
  - signal filling D (PWM),
  - maximum charging current  $I_{max}$ ,
  - graph of CP+, CP-, f, D,  $I_{max}$ ,
  - $t_{off}$  time,
  - $t_{on}$  time.
- » EVSE analysis - simulation of errors (ICCB, EVSC):
  - CPsh - short circuit of CP to PE,
  - Dsh - diode short circuit,
  - PEop - interruption of the PE circuit.
- » EVSE analysis - simulation of errors (ICCB):
  - L1op - break in L1 circuit,
  - L2op - break in L2 circuit,
  - L3op - break in L3 circuit,
  - Nop - break in N circuit,
  - PEop - break in PE circuit,
  - Nop - break in N circuit,
  - L<->PE - interchanged L and PE wires,
  - Uext PE - voltage on PE circuit.
- » EVSE analysis - state transitions.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT III 300 V according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP54

### Other technical specifications:

- » power supply of the meter ..... mains
- » ..... rechargeable battery: Li-Ion 7.2 V 9.8 Ah
- » weight ..... ca. 8.7 kg
- » operating temperature ..... 0...+45°C
- » dimensions ..... 429 x 328 x 236 mm
- » display ..... LCD 5" 1280 x 720
- » memory ..... 9999 entries
- » transmission of results ..... USB, RJ-45, Bluetooth, Wi-Fi

The meter is a part of the **Soneil MeasureEffect™** platform. It is a comprehensive system that enables you to take measurements, store and manage data, and provides multi-level control of your instruments.



**MeasureEffect™**

### Standard accessories:

AEV-100 adapter	WAADAAEV100
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
BNC transmission cable	WAPRZBNC
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEGB1
Pin probe, black 1 kV (banana socket)	WASONBLOGB1
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
230 V mains cable (16 A 5P socket)	WAPRZZAS16P
EV charging cable 2.2 m (type 2 male/type 2 female)	WAKABEV2T2
L4 carrying case	WAFUTL4
USB cable	WAPRZUSB

Factory calibration certificate

### Capabilities

Multifunctional analyzer EVSE-100 is an instrument dedicated to diagnostics of electric vehicle charging stations and cables. Using a single device, we will perform a set of tests on these objects, ending with the generation of a professional report. Through appropriate simulation of CP and PP circuits, the meter can put the station into various operating states. This allows us to verify the correctness of the control system and perform measurements in the field of electric shock protection. We can complete the verification of functionality and safety by simulating errors on both the power and charging sides of the vehicle (CP circuit).


### Applications

The meter makes it possible to carry out diagnostics on:


- » AC electric vehicle charging stations with type 2 connector with socket or fixed charging cable (1-phase and 3-phase),
- » portable electric vehicle charging stations with type 2 connector (1-phase and 3-phase),
- » charging cables.




Diagnostics and measurements of stationary AC charging stations (EVCS)

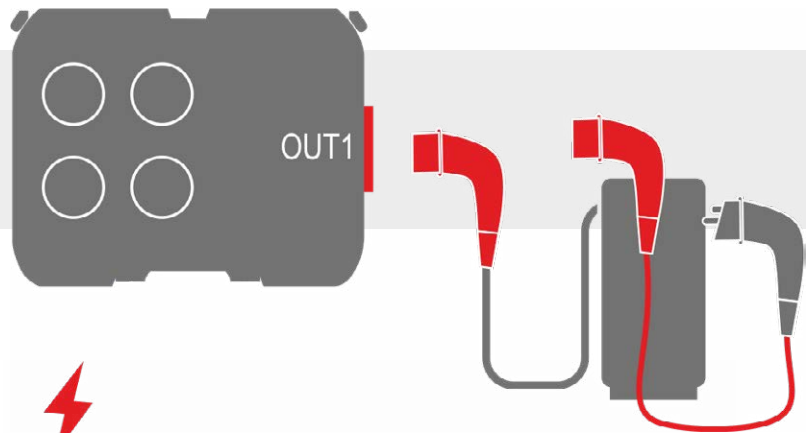


Diagnostics and measurements of portable AC charging stations (ICCB)

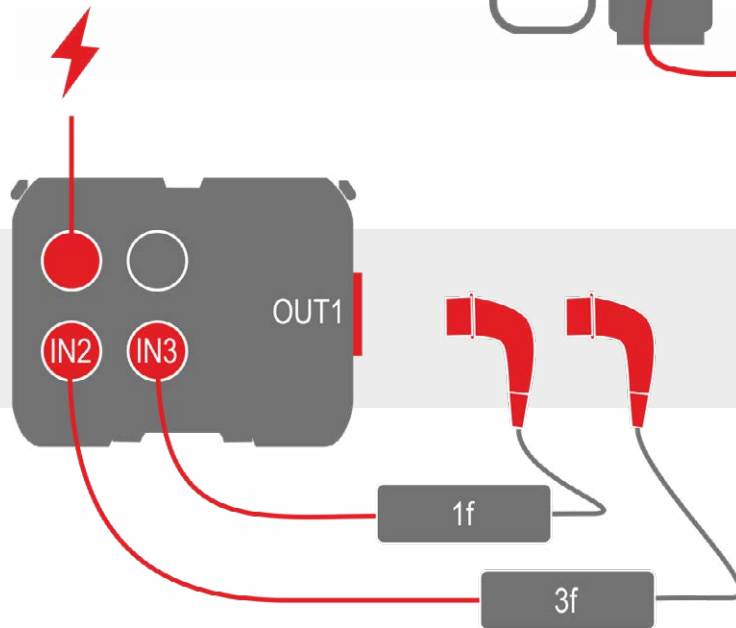

Testing of charging cables

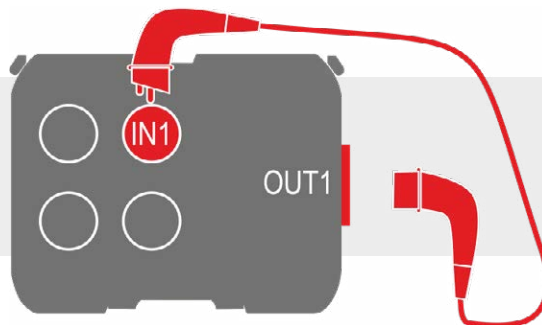

Complex measurements of installations

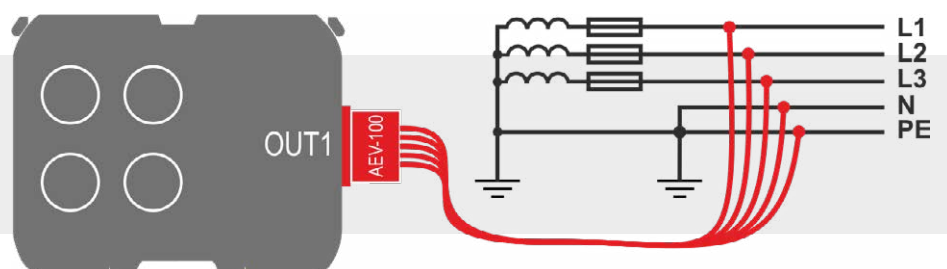



## Adapter for testing vehicle charging stations

### SONEL EVSE-01

index: WAADA-EVSE01



#### Capabilities

Adapter allows to perform comprehensive **measurements of electric vehicle charging stations** - quickly and in accordance with applicable regulations. Simulating the charging cable (proximity pilot line - PP) and vehicle connection status (control pilot line - CP), it will bring the station into different operating states. This will enable **measurements in the field of electric shock protection**:  $Z_s$  fault loop impedance,  $R_{iso}$  insulation resistance and checking the parameters of RCD residual current devices.

To facilitate diagnostics, one of the EVSE-01 sockets is provided with **pulse width modulation signal (PWM)**.

#### Application

The EVSE-01 adapter enables measurements of AC electric vehicle charging stations with **type 2 connector**. Tests for 1-phase and 3-phase stations are available - both with and without ventilation.

#### Standard accessories:

Carrying case	WAFUTM6
---------------	---------

#### Technical specifications

- » type of insulation according to EN 61010-1 ..... double
- » measurement category according to EN 61010-1 ..... CAT II 300 V
- » ingress protection according to EN 60529 ..... IP40
- » pollution degree ..... 2
- » input voltage ..... 400 V (3-phase)
- » frequency ..... 50 Hz, 60 Hz
- » simulation of charging cable PP ..... open circuit, 13 A, 20 A, 32 A, 63 A
- » vehicle connection simulation CP
  - state A ..... vehicle not connected
  - state B ..... vehicle connected, not charging
  - state C ..... vehicle connected, charging without ventilation
  - state D ..... vehicle connected, charging with ventilation
  - state E ..... error - CP short to PE
- » socket types ..... measuring sockets L1, L2, L3, N, PE
  - ..... 1-phase socket
  - ..... CP signal socket - PWM communication
- » test lead (length)
  - EVSE ..... 1 m
  - MPI ..... 0.5 m
- » operating temperature ..... -5...+45°C
- » storage temperature ..... -20...+60°C
- » dimensions ..... 220 x 100 x 60 mm
- » weight ..... 1.4 kg
- » the product meets EMC requirements acc. to standards ..... EN 61326-1 and EN 61326-2-2

#### Works with\*

MPI-540-PV  
MPI-540  
MPI-536  
MPI-535

MPI-530-IT  
MPI-530  
MPI-525  
MPI-520

MPI-507  
MPI-506  
MPI-502F



\* the scope of measurements depends on the capabilities and technical parameters of each model.

#### Functional comparison

	MPI-540-PV MPI-540 MPI-536 MPI-535	MPI-530-IT MPI-530 MPI-525 MPI-520	MPI-507 MPI-506	MPI-502F
auto measurements	✓	-	-	-
automatic three-phase measurement via multiplug	✓	-	-	-
visual inspection	✓	-	-	-
fault loop $Z_{s,PEV}$ $Z_{L-N}$ parameters measurement	✓	✓	✓	✓
6 mA RCD test	✓	-	-	-
RCD test	AC, A, F, B, B+, EV	AC, A, F, B, B+	AC, A	AC, A
insulation resistance $R_{iso}$ measurement	✓	✓	✓	-
measurements report	✓	✓	✓	✓



## SONEL MRP-201

index: WMGBMRP201



## Testing RCD breakers of AC, A and B types:

- » testing of general, short delay and selective RCDs for the rated current values  $I_{\Delta n} = 10, 30, 100, 300, 500$  mA,
- » measurement of triggering current  $I_A$  and trip time  $t_A$  for currents  $0.5 I_{\Delta n}, 1 I_{\Delta n}, 2 I_{\Delta n}, 5 I_{\Delta n}$ ,
- » simultaneous measurement of triggering current  $I_A$  and trip time  $t_A$ ,
- » measurement of  $R_E$  and  $U_B$  without RCD tripping,
- » AUTO RCD test function (automatic measurement of subsequent selected parameters without triggering),
- » automatic measurement for all current shapes for RCDs of type AC, A and B.



MRP-201 measures all kinds of RCDs  
(general, short delay, selective - type AC, A, B).

## Additional functions of the meter:

- » measurement of AC voltage and frequency,
- » checking the correctness of the connection of PE conductor,
- » memory of measurement results (990 cells, 10 000 entries),
- » communication with PC using Bluetooth interface,
- » backlit keyboard.

## The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



MRP-201 has two kinds of automatic measurement mode,  
especially useful when measuring type A and B circuit breakers.

## Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply ..... alkaline batteries (AA, 4 pcs) or rechargeable batteries set (option)
- » weight ..... 0.7 kg
- » dimensions ..... 220 x 102 x 61 mm

## Nominal operating conditions:

- » operating temperature ..... -10...+50°C
- » storage temperature ..... -20...+70°C

## Standard accessories:

WS-05 adapter with UNI-SCHUKO angular plug	WAADAWS05
M6 carrying case	WAFUTM6
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
M1 hanging straps	WAPOZSZE4
4x R6 battery	
Factory calibration certificate	

RCD trigger test and response time measurement  $t_A$ 

Measurement range according to IEC 61557:

0 ms...to the upper limit of the displayed value

RCD type	Rated current multiplication factor	Range	Resolution	Accuracy
General or short delay	$0.5 I_{\Delta n}$	0...300 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$
	$1 I_{\Delta n}$			
	$2 I_{\Delta n}$	0...150 ms		
	$5 I_{\Delta n}$	0...40 ms		
Selective	$0.5 I_{\Delta n}$	0...500 ms	1 ms	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$
	$1 I_{\Delta n}$			
	$2 I_{\Delta n}$	0...200 ms		
	$5 I_{\Delta n}$	0...150 ms		

- » residual current setting accuracy:  
for  $1 I_{\Delta n}, 2 I_{\Delta n}$  and  $5 I_{\Delta n}$ : 0...8%;  
for  $0.5 I_{\Delta n}$ : -8...0%,
- » operating voltage range: 180...270 V
- » operating frequency range: 45...65 Hz

RCD tripping current  $I_A$  for sine AC currentMeasurement range acc. to IEC 61557-6:  $(0.3...1.0)I_{\Delta n}$ 

Selected rated RCD current	Range	Resolution	Measuring current	Accuracy
10 mA	3.0...10.0 mA	0.1 mA	$0.3 I_{\Delta n} \dots 1.0 I_{\Delta n}$	$\pm 5\% I_{\Delta n}$
30 mA	9.0...30.0 mA			
100 mA	30...100 mA			
300 mA	90...300 mA	1 mA		
500 mA	150...500 mA			

- » start of the measurement from the positive or negative half sine period of the test current
- » test current flow time at  $f = 50.0$  Hz max. 7510 ms

Measurement of RCD tripping current  $I_A$  for unidirectional pulsed residual current and unidirectional pulsed current with a 6 mA DC offset

Measurement range acc. to IEC 61557-6:

 $(0.15...1.4)I_{\Delta n}$  for  $I_{\Delta n} > 30$  mA $(0.15...2)I_{\Delta n}$  for  $I_{\Delta n} = 10$  mA

Selected rated RCD current	Range	Resolution	Measuring current	Accuracy
10 mA	1.5...20.0 mA	0.1 mA	$0.15 I_{\Delta n} \dots 2.0 I_{\Delta n}$	$\pm 10\% I_{\Delta n}$
30 mA	4.5...42.0 mA			
100 mA	15...140 mA	1 mA	$0.15 I_{\Delta n} \dots 1.4 I_{\Delta n}$	$\pm 10\% I_{\Delta n}$
300 mA	45...420 mA			

- » start of the measurement from the positive or negative half sine period of the test current
- » test current flow time at  $f = 50.0$  Hz max. 14 710 ms

RCD tripping current  $I_A$  for the residual DC currentMeasurement range acc. to IEC 61557-6:  $(0.2...2)I_{\Delta n}$ 

Selected rated RCD current	Range	Resolution	Measuring current	Accuracy
10 mA	2.0...20.0 mA	0.1 mA	0.2 I <sub>Δn</sub> ...2.0 I <sub>Δn</sub>	±10% I <sub>Δn</sub>
30 mA	6...60 mA	1 mA		
100 mA	20...200 mA			
300 mA	60...600 mA			

- » Measurement possible for positive or negative residual current
- » test current flow time at  $f = 50.0$  Hz max. 4500 ms.

## SONEL IRM-1

index: WMGBIRM1



### Features

- » Measurement of solar radiation and temperature.
- » The LoRa interface for communication with a master meter - offers a larger range than the Bluetooth technology!
- » Automatic data synchronization with a master meter with reSYNC function.
- » Built-in compass and inclination sensor.
- » Built-in recorder that can be used to record solar radiation before constructing PV systems, as well as to measure the shading of existing systems.
- » Large measurement memory: 999 cache memory cells and 5000 recorder records available (one-time recording) with the option of overwriting them (continuous recording).

### Measured parameters

- » Solar radiation intensity (irradiance) in W/m² or BTU/ft²h.
- » PV panel temperature in °C or °F.
- » Ambient temperature in °C or °F.
- » Inclination angle of panels
- » Orientation of the panels with the built-in compass.

### Simple and compact

IRM-1, small, but indispensable for testing PV systems. By measuring solar radiation values, as well as panel and ambient temperatures, it provides the necessary data to convert the results into STC conditions. A built-in recorder with a memory of 5000 records enables the instrument to be used as a tool in the PV plant design process, as well as to diagnose panel shading problems.

### Communication and software

Measurement data from the IRM-1 can be transferred to a computer via the USB port. In addition, the device has a built-in wireless **LoRa interface** (Long Range) for automatic data exchange with the master meter - even over long distances.

### Electrical safety:

- » housing protection rating according to EN 60529 ..... IP65

### Other technical specifications:

- » power supply of the meter ..... Li-Ion 3.7 V 1.3 Ah rechargeable battery
- » weight ..... ca. 0.2 kg
- » dimensions ..... 134 x 79 x 28 mm
- » display ..... LCD
- » memory
  - cache memory ..... 1000 cells
  - recorder ..... 5000 records
- » transmission of results ..... LoRa®

### Standard accessories:

IRM-1 mounting&measuring set	WASONTVPCKPL
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24
M14 carrying case	WAFUTM14
Factory calibration certificate	

### Irradiance measurement

Measuring range: 100 W/m²...1400 W/m², 32 BTU/ft²h...444 BTU/ft²h

Display range	Resolution	Accuracy
0...1400 W/m²	1 W/m²	±(0.5% m.v. + 2 digits)
0...444 BTU/ft²h	1 BTU/ft²h	

### PV and ambient temperature measurement

Display range	Resolution	Accuracy
-20.0...100.0°C	0.1°C	±(1% m.v. + 5 digits)
-4.0...212.0°F	0.1°F	

### Inclination angle measurement

Display range	Resolution	Accuracy
-90...+90°	1°	±2°


### Determination of position direction - compass

Display range	Resolution	Accuracy
0...360°	1°	±5°





## SONEL PVM-1530



### PVM-1530



### IRM-1 IRM-1



### CMP-1015-PV



### PVM-1530 Pro

### PVM-1530 Max

#### Features

- » It can be used for category 1 measurements according to IEC 62446-1.
- » Allows the measurement of the I-U curve for category 2 according to IEC 62446-1 and IEC 61829.
- » Ability to define measurement procedures.
- » It converts measured parameters into STC conditions according to IEC 60891 by cooperation with the IRM-1 solar radiation and temperature meter.
- » reSYNC function – automatic completion of results with environmental parameters and their conversion to STC conditions after restoring connection with IRM-1.
- » The attachable radio interface ensures cooperation with the IRM-1 meter over long distances.
- » Built-in Bluetooth and Wi-Fi for communication with external devices.
- » Large structured memory of measurements.
- » Large touchscreen for good visibility in bright sunlight.

#### Measured parameters

- » Measurement of I-U and P-U characteristics. Conversion to STC conditions.
- » The open circuit voltage of the PV panel or a chain of panels, up to 1500 V DC.
- » RMS voltage of the AC network up to 1000 V with frequency measurement.
- » Short circuit current of a PV panel or chain of panels - up to 40 A DC.
- » Insulation resistance of PV panels - measuring voltage of 250, 500, 1000, 1500 V DC, simultaneous measurement of two values:  $R_{ISO+}$  and  $R_{ISO-}$ .
- » Insulation resistance of AC circuits - measuring voltage 250, 500, 1000 V DC.
- » Resistance of protective conductors and equipotential bonding with  $\pm 200$  mA current.
- » Measurement of PV panels operating current and AC current - all with CMP-1015-PV meter.
- » AC/DC power measurement.
- » Test of bypass diodes, automatic polarity detection.
- » Test of blocking diodes with 1000, 1500 V DC voltage.

#### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT III 1500 V DC according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65

#### Other technical specifications:

- » power supply ..... Li-Ion 7.2 V 9.8 Ah rechargeable battery
- » weight ..... ca. 8.8 kg
- » dimensions ..... 390 x 308 x 172 mm
- » display ..... LCD 7" 1280 x 720
- » memory ..... 9999 entries
- » transmission of results ..... USB, RJ-45, Bluetooth, Wi-Fi

#### Choose the best set for your needs

##### PVM-1530 Max

Set of meters for measuring photovoltaic installations (PVM-1530, 2x IRM-1, CMP-1015-PV)

index: WMGBPVM1530MAX

##### PVM-1530 Pro

Set of meters for measuring photovoltaic installations (PVM-1530, IRM-1, CMP-1015-PV)

index: WMGBPVM1530PRO

##### PVM-1530

Photovoltaic meter

index: WMGBPVM1530

The meter is a part of the **Sonel MeasureEffect™** platform. It is a comprehensive system that enables you to take measurements, store and manage data, and provides multi-level control of your instruments.



#### PVM-1530: cat 1 measurements and I-U characteristics

The PVM-1530 is a pioneering meter for photovoltaic installations up to 1500 V with such a substantial number of measurement functions. Their selection is done via a touch screen. The screen is large, colorful and with strong backlight so that operation in full sunlight is not a problem. Extensive structural memory significantly reduces the time for preparing post-measurement documentation.

#### Tightness and durability

The meters perform well in harsh environmental conditions. The PVM-1530's housing is rugged and tight when closed to easily ensure that the meter is protected during measurement.

#### Communication and software

Measurement data from the PVM-1530 can be transferred to a computer via Bluetooth wireless communication. Saving the downloaded data to popular formats and printing ensured by **Sonel Reader**. In order to generate a report on electric shock protection use the optional software: **Sonel Reports Plus**.

#### Trouble? reSYNC!

It may happen that in the course of measurements the PVM-1530 moves away from the IRM-1 so far, that communication between them is lost. If the measurements are continued, then after the connection is restored, the results will be automatically **supplemented with environmental parameters**, which in the meantime were recorded by the IRM-1 in its **temporary memory**, and converted into STC conditions.



## Choose the best set for your needs

PVM-1530

IRM-1

CMP-1015-PV

### PVM-1530 Max

Photovoltaic meter, two solar radiation and temperature meters and clamp meter



### PVM-1530 Pro

Photovoltaic meter, solar radiation and temperature meter and clamp meter



### PVM-1530

Photovoltaic meter



#### Standard accessories:

		PVM-1530 Max	PVM-1530 Pro	PVM-1530
		WMGBPVM1530MAX	WMGBPVM1530PRO	WMGBPVM1530
PVM-1530 photovoltaic meter		1	1	1
IRM-1 solar radiation and temperature meter		2	1	
CMP-1015-PV clamp meter		1	1	
IRM-1 mounting&measuring set	WASONTPVCKPL	2	1	
LORA-S1 USB adapter for data transmission	WAADAUSBLORA	1	1	
MC4-banana sockets adapter 1.5 kV (set of 2 pcs.)	WAADA5KVMC4KPL	1	1	1
Cable 2 m with MC4 plugs (set of 2 pcs.)	WAPRZ002MC4KPL	1	1	1
Test lead 3 m blue 5 kV (banana plugs)	WAPRZ003BUBB5K	1	1	1
Test lead 3 m yellow CAT III 1500 V (banana plugs)	WAPRZ003YEBB1K5V	1	1	1
Test lead 1.8 m, red, 5 kV (banana plugs)	WAPRZ1X8REBB	1	1	1
Test lead 1.8 m, black, 5 kV (banana plugs, shielded)	WAPRZ1X8BLBB5K	1	1	1
Set of test leads (CAT IV, M)	WAPRZCMP2	1	1	
Black "crocodile" clip 1 kV 20 A	WAKROBL20K01	2	2	2
Pin probe, black 5 kV (banana socket)	WASONBLOGB2	2	2	2
Temperature measurement probe (type K)	WASONTEMK	1	1	
Type K temperature probe adapter	WAADATEMK	1	1	
Li-Pol battery 7.4 V 1200 mAh	WAAKU30	1	1	
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24	2	1	
Battery charger	WAZASZ25	1	1	
Battery charger power supply	WAZASZ26	1	1	
L4 carrying case	WAFUTL4	1	1	1
M-3 carrying case	WAWALM3	1	1	
USB cable	WAPRZUSB	1	1	1
230 V mains cable (IEC C13 plug)	WAPRZ1X8BLIEC	1	1	1
Key for MC4 connectors	WAPRZ1X8BLIEC	1	1	1
Fuse 0.5 A, 1000 V AC/DC, 6.3x32 mm	WAPRZ1X8BLIEC	1	1	1
Factory calibration certificate - PVM-1530		1	1	1
Factory calibration certificate - IRM-1		2	1	
Factory calibration certificate - CMP-1015-PV		1	1	



### DC voltage measurement

Test range: 0 V...1500 V DC

Display range	Resolution	Accuracy
0.0...1500.0 V	0.1 V	$\pm(0.5\% \text{ m.v.} + 2 \text{ digits})$

### AC voltage measurement - True RMS

Test range: 0 V...1000 V AC

Display range	Resolution	Accuracy
0.0...1000.0 V	0.1 V	$\pm(2\% \text{ m.v.} + 6 \text{ digits})$

### Frequency measurement

Test range: 10,0...100,0 Hz

Display range	Resolution	Accuracy
0.0...100.0 Hz	0.1 Hz	$\pm(0.5\% \text{ m.v.} + 2 \text{ digits})$

### Short circuit current $I_{sc}$ measurement

Display range	Resolution	Accuracy
0.00...30.00 A for 1500 V DC 0.00...40.00 A for 1000 V DC	0.01 A	$\pm(1\% \text{ m.v.} + 2 \text{ digits})$

### Insulation resistance measurement - PV module / PV installation

Test range according to IEC 61557-2:

$U_{iso} = 250 / 500 / 1000 / 1500 \text{ V DC}$ : **250 k $\Omega$ ...500 M $\Omega$**

### Insulation resistance measurement

Test range according to IEC 61557-2:

$U_{iso} = 250 \text{ V DC}$ : **250 k $\Omega$ ...200 M $\Omega$**

$U_{iso} = 500 \text{ V DC}$ : **500 k $\Omega$ ...500 M $\Omega$**

$U_{iso} = 1000 \text{ V DC}$ : **1000 k $\Omega$ ...1.000 G $\Omega$**

### Active power measurement – AC and DC voltage

Display range	Resolution	Accuracy
0.0...999.0 kW	0.01 kW	Depends on the accuracy of voltage and current measurement

### Low-voltage measurement of circuit continuity and resistance

Testing of protective conductor continuity with  $\pm 200 \text{ mA}$  current

Measuring range according to EN 61557-4: **0.11...1999  $\Omega$**

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	$\pm(4\% \text{ m.v.} + 3 \text{ digits})$

- » Voltage on open terminals: 4...24 V
- » Output current at  $R \leq 2 \Omega$ : min. 200 mA
- » Automatic calibration of test leads
- » Measurements for both current polarities

### I-U curve

- » Measurement of  $I_{sc}$ ,  $I_{mpp}$  – ranges and accuracies as in section "Short circuit current  $I_{sc}$  measurement"
- » Measurement of  $U_{oc}$ ,  $U_{mpp}$  – ranges and accuracies as in section "DC voltage measurement"





## SONEL PVM-1020



Choose the best set for your needs

### PVM-1020 KIT

Photovoltaic meter and solar radiation and temperature meter

index: WMGBPVM1020KIT

### PVM-1020

Photovoltaic meter

index: WMGBPVM1020

### Features

- » It can be used for category 1 measurements according to IEC 62446-1.
- » **AUTO mode** for performing a sequence of measurements after one press of the **START** button.
- » It converts measured parameters into STC conditions according to IEC 60891 by cooperation with the **IRM-1** solar radiation and temperature meter.
- » **reSYNC function** – automatic completion of results with environmental parameters and their conversion to STC conditions after restoring connection with IRM-1.
- » The built-in LoRa radio interface ensures cooperation with the IRM-1 meter over long distances.
- » Built-in Bluetooth module for communication with a computer.
- » Large measurement memory: 100 objects with 40 cells each.
- » Backlit display and buttons.

### Measured parameters

- » The open circuit voltage of the PV panel or a chain of panels, up to 1000V DC.
- » RMS voltage of the AC network up to 600 V with frequency measurement.
- » Short circuit current of a PV panel or chain of panels - up to 20 A DC.
- » Insulation resistance of PV panels - measuring voltage of 250, 500 or 1000 V DC, simultaneous measurement of two values:  $R_{ISO+}$  and  $R_{ISO-}$ .
- » Insulation resistance of AC circuits - measuring voltage 250, 500 or 1000 V DC.
- » Resistance of protective conductors and equipotential bonding with  $\pm 200$  mA current. Low-current resistance measurement, audible and visual signalling.
- » Measurement of PV panels operating current and AC current - all with external clamp.
- » AC/DC power Measurement.
- » Diode test with 200 mA current, automatic polarity detection. Test of blocking diodes with 1000V DC voltage.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT II 1000 V DC according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65

### Other technical specifications:

- » power supply ..... alkaline batteries (AA, 4 pcs) or rechargeable batteries set (option)
- » weight ..... ca. 1,0 kg
- » dimensions ..... 228 x 102 x 61 mm
- » display ..... graphical LCD
- » memory ..... 4059 entries
- » transmission of results ..... Bluetooth

### Great capabilities in a small casing

PVM-1020 meter is probably the world's smallest photovoltaic system meter with such a substantial number of measurement functions. The functions are selected with a rotary switch. Additional parameters are set with buttons located on the housing. All buttons and the graphic display are backlit, which greatly facilitates operation in shaded places, e.g. when taking measurements under ground-mounted PV systems. Large memory significantly shortens preparation of documents after the measurement.

### Tightness and durability

The meters perform well in harsh environmental conditions. Protection against the ingress of dust and water is provided by the housing rated at **IP65**. This is especially important for measurements on photovoltaic systems, which are outdoor installations.

### Communication and software

Measurement data from the PVM-1020 can be transferred to a computer via Bluetooth wireless communication. Saving the downloaded data to popular formats and printing ensured by **Sonel Reader**. In order to generate a report on electric shock protection use the optional software: **Sonel Reports Plus**.

### Trouble? reSYNC!

It may happen that in the course of measurements the PVM-1020 moves away from the IRM-1 so far, that communication between them is lost. If the measurements are continued, then after the connection is restored, the results will be automatically **supplemented with environmental parameters**, which in the meantime were recorded by the IRM-1 in its **temporary memory**, and converted into STC conditions.

## DC voltage measurement

Display range	Resolution	Accuracy
0.0...1000.0 V	0.1 V	±(0.5% m.v. + 2 digits)

## AC voltage measurement - True RMS

Display range	Resolution	Accuracy
0.0...600.0 V	0.1 V	±(2% m.v. + 6 digits)

## Short circuit current $I_{sc}$ measurement

Display range	Resolution	Accuracy
0.00...20.00 A	0.01 A	±(1% m.v. + 2 digits)

## Insulation resistance measurement - PV module / PV installation

Test range according to IEC 61557-2:

$U_{ISO}$  = 250 / 500 / 1000 V DC: **250 kΩ...1.000 GΩ**

## Insulation resistance measurement

Test range according to IEC 61557-2:

$U_{ISO}$  = 250 V DC: **250 kΩ...2.000 GΩ**

$U_{ISO}$  = 500 V DC: **250 kΩ...5.00 GΩ**

$U_{ISO}$  = 1000 V DC: **500 kΩ...9.999 GΩ**

## Active power measurement – AC and DC voltage

Display range	Resolution	Accuracy
0.0...100.0 kW	0.1 kW	±(6% m.v. + 5 digits)

## Low-voltage measurement of circuit continuity and resistance

Testing of protective conductor continuity with ±200 mA current

Measuring range according to EN 61557-4: **0.10...1999 Ω**

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...1999 Ω	1 Ω	±(4% m.v. + 3 digits)

- » Voltage on open terminals:  $4\text{ V} < U_{oc} < 8\text{ V}$
- » Output current at  $R \leq 2\text{ Ω}$ : min. 200 mA
- » Automatic calibration of test leads
- » Measurements for both current polarities



## Standard accessories:

	PVM-1020 KIT	PVM-1020
	WMGBPVM1020KIT	WMGBPVM1020
PVM-1020 photovoltaic meter	1	1
IRM-1 solar radiation and temperature meter	1	
IRM-1 mounting&measuring set	WASONTVPCKPL	1
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB	1
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	1
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB	1
Black "crocodile" clip 1 kV 20 A	WAKROBL20K01	1
Red "crocodile" clip 1 kV 20 A	WAKRORE20K02	1
Yellow "crocodile" clip 1 kV 20 A	WAKROYE20K02	1
Test probe with banana socket; 1 kV; red	WASONREOGB1	1
MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4	1
C-PV clamp	WACEGCPVOKR	1
Meter strap (type M-1)	WAPZSZE4	1
L4 carrying case	WAFUTL4	
M6 carrying case	WAFUTM6	1
5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24	1
AA 1.5 V battery	4	4
AAA 1.5 V battery	2	2
Factory calibration certificate - PVM-1020	1	1
Factory calibration certificate - IRM-1	1	

# MPI / MRP / PVM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories





















Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	PVM-1020 photovoltaic meter	WMGBPVM1020																				1	1	*
	PVM-1530 photovoltaic meter	WMGBPVM1530																	1	1	1			
	IRM-1 solar radiation and temperature meter	WMGBIRM1	1	*	*														2	1	*	1	*	1
	CMP-1015-PV clamp meter + standard accessories	WMGBCMP1015PV																	1	1	*			
	Optional accessories for CMP-1015-PV	-																	*	*				
	AC-16 line splitter	WAADAAC16	*	*	*	*	*			*		*	*						*	*		*	*	
	AEV-100 adapter	WAADAAEV100															1							
	AGT-16C three-phase socket adapter 16 A	WAADAAGT16C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-16P three-phase socket adapter 16 A	WAADAAGT16P	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-16T industrial socket adapter 16 A	WAADAAGT16T	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-32C three-phase socket adapter 32 A	WAADAAGT32C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-32P three-phase socket adapter 32 A	WAADAAGT32P	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-32T industrial socket adapter 32 A	WAADAAGT32T	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AGT-63P three-phase socket adapter 63 A	WAADAAGT63P	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*				*	*	
	AutoISO-1000C adapter	WAADAAISO10C	*	*	*	*	*		*	*		*	*											
	AutoISO-2500 adapter	WAADAAISO25						*		*														
	EVSE-01 adapter	WAADAEVSE01	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*						
	PVM-1 adapter	WAADAPVM1	1	1	1																			
	IRM-1 mounting&measuring set (solar radiation meter mounting kit for PV panels + probe for measuring the temperature of PV panels and the ambient temperature)	WASONTPVCKPL	1	*	*														2	1		1		1



# MPI / MRP / PVM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	Solar radiation measurement set (IRM-1 solar radiation and temperature meter + IRM-1 mounting&measuring set + Z24 power supply + LORA-S1 adapter for data transmission + M14 carrying case)	WMGBIRM1MPI	•	•	•																			
	TWR-1J - RCD breaker testing adapter	WAADATWR1J	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•						
	WS-01 adapter with START button with UNI-Schuko plug	WAADAWS01														•	•							
	WS-03 adapter with START button with UNI-Schuko plug	WAADAWS03	1	1	1	1	1	1	1	1	1	1	1	1	1	1								
	WS-04 adapter with UNI-Schuko plug	WAADAWS04	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
	WS-05 adapter with UNI-Schuko plug	WAADAWS05												•	•	•		1						
	WS-06 adapter (miniDIN-4P plug)	WAADAWS06	•	•	•	•	•	•	•	•														
	WS-07 adapter for measuring Z(L-N)	WAADAWS07												•	•	•								
	WS-09 adapter (pin probe)	WAADAWS09	•	•	•	•	•	•	•															
	Voltage adapters with M4/M6 thread (set of 4 pcs.)	WAADAM4M64	1	1	1	1	1																	
	MC4-banana sockets adapter (set of 2 pcs.)	WAADAMC4	1	1	1																1	1		
	MC4-banana sockets adapter 1.5 kV (set of 2 pcs.)	WAADA5KVMC4KPL																	1	1	1			
	MC4 splitter for power measurement in PV systems (set of 2 pcs.)	WAADAMC4SKPL	•	•	•																	•	•	
	MC4 splitter for power measurement in PV installations 1500 V (set of 2 pcs.)	WAADAMC4SV2KPL																	•	•	•			
	Cable 2 m with MC4 plugs (set of 2 pcs.)	WAPRZ002MC4KPL																	1	1	1			
	Adapter for C-PV clamp	WAADACPV	1	1	1																			
	Double-wire test lead 2 m, for N-1 clamps (banana plugs)	WAPRZ002DZBB	•	•	•	•	•	•	•	•														
	F-1A flexible coil (Ø360 mm)	WACEGF1AOKR	•	•	•	•	•			•														
	F-2A flexible coil (Ø235 mm)	WACEGF2AOKR	•	•	•	•	•			•														
	F-3A flexible coil (Ø120 mm)	WACEGF3AOKR	3	3	•	3	•			•														

# MPI / MRP / PVM

Set of standard and optional accessories





















1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	N-1 transmitting clamp (Ø52 mm)	WACEGN1BB	•	•	•	•	•	•	•	•														
	C-3 current clamp (Ø52 mm)	WACEGC30KR	•	•	•	•	•	•	•			•	•											
	C-4A current clamp (Ø52 mm)	WACEGC4AOKR	•	•	•	•	•																	
	C-5A current clamp (Ø39 mm)	WACEGC5AOKR	•	•	•	•	•																	
	C-6A current clamp (Ø20 mm)	WACEGC6AOKR	•	•	•	•	•			•														
	C-7A current clamp (Ø24 mm)	WACEGC7AOKR	•	•	•	•	•																	
	C-PV clamp	WACEGCPVOKR	1	1	1																	1	1	
	Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01	1	1	1	1	1				1						•		2	2	2	1	1	
	Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	1	1	1	1	1	1	1	1	•	1	1	1	1	•		•	•	•	•	1	1	
	Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	1	1	1	1	1	1	1	1	•	•	•	•	•	•	•	•	•	•	•			
	Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	•	•	•	1	1	
	Crocodile clip, black, 11 kV, 32 A	WAKROBL32K09						1			1													
	Crocodile clip, red, 11 kV, 32 A	WAKRORE32K09						•		•														
	Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB															1					1	1	
	Test lead 1.2 m, black, 1 kV with markers (banana plugs)	WAPRZ1X2BLBBN	1	1	1	1	1																	
	Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	1	1	1	1	1	1	1	1	1	1	1	1	1	1		1				1	1	
	Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1						
	Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				1	1	
	Test lead 3 m yellow CAT III 1500 V (banana plugs)	WAPRZ003YEBB1K5V																	1	1	1			
	Test lead 5 m, red, 1 kV (banana plugs)	WAPRZ005REBB	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•						

# MPI / MRP / PVM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	Test lead 10 m, red, 1 kV (banana plugs)	WAPRZ010REBB	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
	Test lead 20 m red 1 kV (banana plugs)	WAPRZ020REBB	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
	Test lead 30 m, red, 1 kV (banana plugs)	WAPRZ030REBBN												1			•							
	Test lead 15 m, blue, 1 kV (banana plugs)	WAPRZ015BUBBN												1			•							
	Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ	1	1	1	1	1	1	1	1	1	1	•	•										
	Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ	•	•	•	•	•	•	•	•	•	•	•	•										
	Test lead 25 m, blue (banana plugs, on a reel)	WAPRZ025BUBBSZ	•	•	•	•	•	•	•	•	•	•	•	•										
	Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ	1	1	1	1	1	1	1	1	1	1	•	•										
	Test lead 50 m, yellow (banana plugs, on a reel)	WAPRZ050YEBBSZ	•	•	•	•	•	•	•	•	•	•	•	•										
	Test lead 1.8 m, black, 5 kV (banana plugs, shielded)	WAPRZ1X8BLBB						1			1													
	Test lead 1.8 m, black, 5 kV (banana plugs, shielded)	WAPRZ1X8BLBB5K																	1	1	1			
	Test lead 1.8 m, red, 5 kV (banana plugs)	WAPRZ1X8REBB						1			1								1	1	1			
	Test lead 3 m blue 5 kV (banana plugs)	WAPRZ003BUBB5K																	1	1	1			
	BNC transmission cable	WAPRZBNC															1							
	PRS-1 resistance test probe	WASONPRS1	•	•	•	•	•	•	•	•	•	•	•											
	LP-1 light meter probe (miniDIN-4P plug)	WAADALP1	•	•	•	•	•	•	•	•	•	•												
	LP-1 light meter probe for MPI (set, WS-06 plug)	WAADALP1KPL	•	•	•	•	•	•	•	•	•													
	LP-10A light meter probe (miniDIN-4P plug)	WAADALP10A	•	•	•	•	•	•	•	•	•													
	LP-10A light meter probe for MPI (set, WS-06 plug)	WAADALP10AKPL	•	•	•	•	•	•	•	•	•													
	LP-10B light meter probe (miniDIN-4P plug)	WAADALP10B	•	•	•	•	•	•	•	•														



# MPI / MRP / PVM

Set of standard and optional accessories





















1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	LP-10B light meter probe (set, WS-06 plug)	WAADALP10BKPL	•	•	•	•	•	•	•	•														
	Foldable pin probe, 1 kV, 2 m (banana socket)	WASONSP2M	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•						
	Pin probe, black 1 kV (banana socket)	WASONBLOGB1															1		•	•	•	•	•	
	Pin probe, red 1 kV (banana socket)	WASONREOGB1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		1	•	•	•	1	1	
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	•	•	•	•			
	Pin probe, yellow 1 kV (banana socket)	WASONYEGB1	1	1	1	1	1	1	1	1	1	1	•	1	1	•	1	•	•	•	•	•	•	
	Pin probe, black 5 kV (banana socket)	WASONBLOGB2						•		•								2	2	2				
	Pin probe, red 5 kV (banana socket)	WASONREOGB2					1			1														
	Probe for measuring the temperature of PV panels and the ambient temperature	WASONT PVC	•	•	•																	•	•	
	Earth contact test probe (rod), 25 cm	WASONG25												2			•							
	Earth contact test probe (rod), 30 cm	WASONG30	2	2	2	2	2	2	2	2	2	2	•	•										
	Earth contact test probe (rod), 80 cm	WASONG80V2	•	•	•	•	•	•	•	•	•	•	•	•										
	Cramp (banana socket)	WAZACIMA1	•	•	•	•	•	•	•	•	•	•	•	•										
	CS-1 cable simulator	WAADACS1	•	•	•	•	•	•	•	•	•	•	•											
	CS-5kV calibration box	WAADACS5KV						•		•														
	Fuse 0.5 A, 1000 V AC/DC, 6.3x32 mm	WAPOZB05A1000V																	1	1	1			
	NiMH battery 4.8 V 4.2 Ah	WAAKU07								1	1	•	•											
	Li-Ion battery 11.1 V 3.4 Ah	WAAKU15	1	1	1	1	1	1	1															
	Battery container	WAPQJ1								•	•	1	1											
	Z7 power supply	WAZASZ7	1	1	1	1	1	1	1	1	1	•	•											

# MPI / MRP / PVM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	Z24 5 V power supply with USB 2.0 output and a detachable micro-USB cable	WAZASZ24	1																2	1		1		1
	230 V mains cable (IEC C7 plug)	WAPRZLAD230	1	1	1	1	1	1	1	1	1	•	•											
	230 V mains cable (IEC C13 plug)	WAPRZ1X8BLIEC																	1	1	1			
	230 V mains cable (16 A 5P socket)	WAPRZZAS16P															1							
	Three-phase mains cable (16 A 5P socket)	WAPRZZAS16P3F															•							
	MPI charging set (charger + battery)	WAKPLLADMPI520								•	•	•	•											
	AZ-2 power supply adapter (IEC C7 plug/banana connectors)	WAADAAZ2	•	•	•	•	•	•	•															
	Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM	1	1	1	1	1	1	1	1	•	•	•											
	EV charging cable 2.2 m (type 2 male/type 2 female)	WAKABEVT2T2															1							
	Test wire reel	WAPOZSZP1	•	•	•	•	•	•	•	•	•	•	•											
	L2 hanging straps (set)	WAPOZSZEKPL	1	1	1	1	1	1	1	1	1	1	1											
	M1 hanging straps	WAPOZSZE4												1	1	1		1				1	1	
	M1 hanging hook straps	WAPOZUCH1												1	1	1	•				•	•		
	Magnetic hanging strap	WAPOZUCH6												•	•	•								
	Cover (universal)	WAPOZUCH12	•	•	•	•	•	•	•	•	•	•	•											
	Solar radiation meter mounting kit for PV panels	WAPOZUCHPV	•	•	•																	1		1
	Clamp for mounting the solar radiation meter to the solar panels	WAZACPV	•	•	•																	•		•
	Key for MC4 connectors	WAPOZKEYMC4	•	•	•														1	1	1	•	•	
	L2 carrying case	WAFUTL2	•	1	1	1	1	1	1	1	1	1	•											
	L3 carrying case for a 80 cm rods	WAFUTL3	•	•	•	•	•	•	•	•	•	•	•											

## MPI / MRP / PVM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start	MPI-536	MPI-535	MPI-530/530-IT	MPI-525	MPI-520	MPI-520 Start	MPI-507	MPI-506	MPI-502F	EVSE-100	MRP-201	PVM-1530 Max	PVM-1530 Pro	PVM-1530	PVM-1020 KIT	PVM-1020	IRM-1
	L4 carrying case	WAFUTL4										•	1				1		1	1	1	1		
	L19 backpack	WAFUTL19	1	•	•	•	•	•	•															
	M6 carrying case	WAFUTM6												1	1	1		1					1	
	M13 carrying case	WAFUTM13	•	1	1																			
	M14 carrying case	WAFUTM14																						1
	XL12 hard carrying case	WAWALXL12		•	•	•	•	•	•															
	XL13 hard carrying case	WAWALXL13								•														
	S4 armband case for mini Bluetooth keyboard	WAFUTS4								•														
	USB cable	WAPRZUSB	1	1	1	1	1	1	1	1	1	1	1				1		1	1	1			
	LORA-S1 USB adapter for data transmission	WAADAUSBLORA	1	•	•														1	1				
	OR-1 USB wireless receiver	WAADAUSBOR1									•	•	•					1						
	Touchscreen pen	WAPOZTPEN	1	1	1	1	1	1	1															
	PC software: Sonei Reports Plus	WAPROREPORTSPLUS	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PC software: Sonei Reader	WAPROREADER	1	1	1	1	1	1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


## SONEL MPI MOBILE



A mobile version of the program cooperating with a multifunctional Sonei instrument: MPI-530-IT / MPI-530 meters of electrical system parameters. It can be downloaded from **Google Play**.

With the application you can **connect directly to the device** via Bluetooth and download the measurement data from the meter. After reading the measurements from the instrument, they can be easily and quickly **viewed**, but also **sent from the measurement place** to a person who can help interpret the data or perform a measurements documentation.

To each measurement we can add, voice memo, note, GPS data, or photo. From the application level we also have **access to the meter's user manual**.

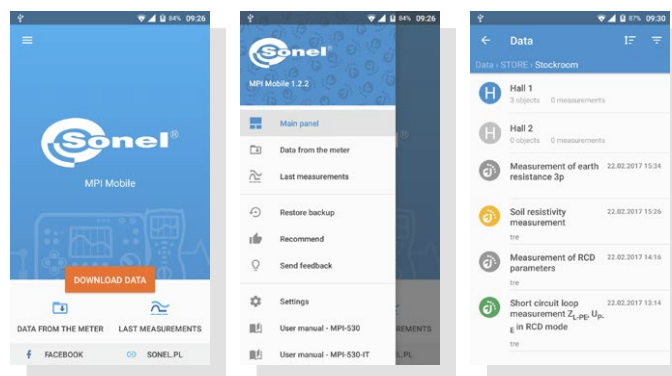



## Insulation resistance meters

MIC-15k1  
MIC-10k1  
MIC-5050

MIC-5010  
MIC-5005  
MIC-5001


MIC-2511  
MIC-2501

MIC-30  
MIC-10

MIC-5  
MIC-RS

## Comparison of insulation resistance meters

	MIC-15k1	MIC-10k1	MIC-5050	MIC-5010	MIC-5005	MIC-5001	MIC-2511	MIC-2501	MIC-30
Measurement voltage [V]	50...15 000	50...10 000	50...5000	50...5000	50...5000	50...5000	10...2500	100...2500	50...1000
Measuring range	50 kΩ...40 TΩ	10 kΩ...40 TΩ	20 kΩ...20 TΩ	20 kΩ...15 TΩ	20 kΩ...15 TΩ	50 kΩ...5 TΩ	50 kΩ...2 TΩ	50 kΩ...2 TΩ	50 kΩ...100 GΩ
Short-circuit current I <sub>sc</sub>	1.2/3/5/7 mA	1.2/3/6 mA	1.2/3/6 mA	1.2/3 mA	1.2/3 mA	1.5 mA	≤2 mA	1 mA	1 mA
Setting of 3 measurement times for calculation of Ab1, Ab2, PI, DAR	1...600 s	1...600 s	1...600 s	1...600 s	1...600 s	1...600 s	1...600 s	1...600 s	1...600 s
Maximum setting of measurement time	99'59"	99'59"	99'59"	99'59"	99'59"	10'	60'	10'	10'
Measurement of insulation resistance using the three-terminal method	✓	✓	✓	✓	✓	✓	✓	✓	✓
Measurement of 2 absorption coefficients	✓	✓	✓	✓	✓	✓	✓	✓	✓
Measurement of leakage current during insulation resistance measurement	✓	✓	✓	✓	✓	✓	✓	✓	✓
Automatic discharging of object after measurement	✓	✓	✓	✓	✓	✓	✓	✓	✓
Built-in quick charger	✓	✓	✓	✓	✓	✓	✓	✓	—
Power supply	rechargeable battery	rechargeable battery	rechargeable battery	rechargeable battery	rechargeable battery	rechargeable battery	rechargeable battery	rechargeable battery	AA batteries or rechargeable batteries
Low-voltage resistance measurement	—	—	—	—	—	—	✓	—	✓
Continuity test with current ≥200mA (resolution 0.01Ω)	—	—	—	✓	—	—	✓	✓	✓
Automatic measurement of 3-, 4- and 5-core cords by means of AutoISO adapters	—	AutoISO-5000	AutoISO-5000	—	—	—	AutoISO-2511	—	—
Voltage measurement	0...600 V	0...750 V	0...750 V	0...600 V	0...600 V	0...750 V	0...1500 V	0...750 V	0...600 V
Temperature measurement	—	✓	✓	—	—	—	✓	—	—
Plotting of insulation resistance and leakage current characteristics	in mobile application	✓	✓	in mobile application	in mobile application	✓	✓	✓	—
Automatic in-socket measurement	—	—	—	—	—	—	—	—	✓
Capacitance measurement	✓	✓	✓	✓	✓	—	✓	—	✓
Memory (number of records)	990 autosave	10 000	10 000	990	990	990	9999	990	990
Data transmission	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB	USB	USB	Bluetooth
Dimensions [mm]	390 x 308 x 172	390 x 308 x 172	390 x 308 x 172	390 x 308 x 172	390 x 308 x 172	200 x 180 x 77	234 x 169 x 70	200 x 180 x 77	200 x 150 x 60
Weight [kg]	6.6	6.1	6.1	6.0	6.0	1.0	1.3	1.0	0.6

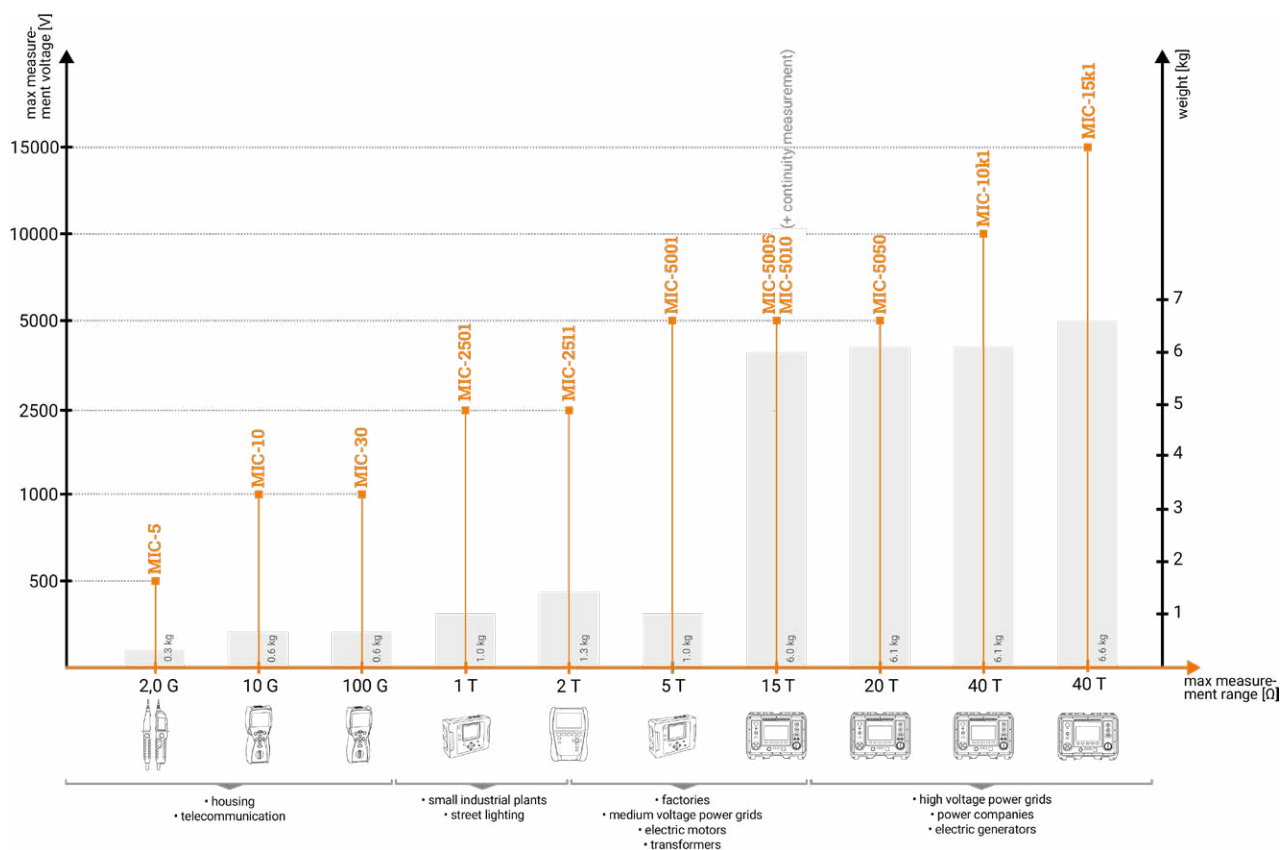



MIC-10	MIC-5	MIC-RS	MPI-540-PV MPI-540 MPI-535	MPI-536	MPI-530-IT MPI-530	MPI-525	MPI-520	MPI-507 MPI-506	
50, 100, 250, 500, 1000	250, 500	50...1000	50, 100, 250, 500, 1000	10, 50, 100, 250, 500, 1000, 1500, 2500	50, 100, 250, 500, 1000	50, 100, 250, 500, 1000, 2500	50, 100, 250, 500, 1000	100, 250, 500	Measurement voltage [V]
50 kΩ...10 GΩ	250 kΩ...1.999 GΩ	500 kΩ...2.000 GΩ	50 kΩ...9.99 GΩ	10 kΩ...9.99 GΩ	50 kΩ...9.99 GΩ	50 kΩ...9.99 GΩ	50 kΩ...3 GΩ	100 kΩ...600 MΩ	Measuring range
1 mA	<1.4 mA	≤2 mA	<2 mA	<2 mA	<2 mA	<2 mA	<2 mA	<2 mA	Short-circuit current I <sub>sc</sub>
—	—	—	—	1...600 s	—	1...600 s	—	—	Setting of 3 measurement times for calculation of Ab1, Ab2, Pl, DAR
—	—	—	—	5'	—	5'	—	—	Maximum setting of measurement time
√	—	—	—	—	—	—	—	—	Measurement of insulation resistance using the three-terminal method
—	—	—	—	√	—	√	—	—	Measurement of 2 absorption coefficients
—	—	—	—	—	—	—	—	—	Measurement of leakage current during insulation resistance measurement
√	√	√	√	√	√	√	√	√	Automatic discharging of object after measurement
—	—	—	√	√	√	√	√	—	Built-in quick charger
AA batteries or rechargeable batteries	AAA batteries or rechargeable batteries	external, isolated 24 V DC	rechargeable battery	rechargeable battery	rechargeable battery or batteries	rechargeable battery or batteries	batteries or rechargeable batteries	batteries or rechargeable batteries	Power supply
√	√	√	√	√	√	√	√	√	Low-voltage resistance measurement
√	—	—	√	√	√	√	√	√	Continuity test with current ≥200mA (resolution 0.01Ω)
—	—	—	—	AutoISO-2500	—	AutoISO-2500	—	—	Automatic measurement of 3-, 4- and 5-core cords by means of AutoISO adapters
0...600 V	0...600 V	—	0...500 V	0...500 V	0...500 V	0...500 V	0...500 V	0...500 V	Voltage measurement
—	—	—	—	—	—	—	—	—	Temperature measurement
—	—	—	—	√	—	—	—	—	Plotting of insulation resistance and leakage current characteristics
—	—	—	√	—	√	—	√	√	Automatic in-socket measurement
√	—	√	—	—	—	—	—	—	Capacitance measurement
—	—	—	100 000	100 000	10 000	990	990	990	Memory (number of records)
—	—	RS-232 / RS-485 MIC-RS-SCP / Modbus	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	USB, Bluetooth	Data transmission
220 x 100 x 60	275 x 82 x 36	55 x 130 x 215	288 x 223 x 75	288 x 223 x 75	295 x 223 x 75	288 x 223 x 75	288 x 223 x 75	220 x 102 x 61 mm	Dimensions [mm]
0.6	0.3	0.8	2.5	2.5	2.2	2.2	2.2	0.8	Weight [kg]

In addition to specific meters you can also purchase:

Adapter for measuring insulation resistance

**SONEL AutoISO-2500**

index: WAADAAISO25

**Insulation resistance measurements:**

- » insulation measurement of 3-, 4- and 5-wire cables and wires using test voltage up to 2.5 kV optional for MPI-536, MPI-525



Adapter for measuring insulation resistance

**SONEL AutoISO-2511**

index: WAADAAISO2511

**Insulation resistance measurements:**

- » insulation measurement of 3-, 4- and 5-wire cables and wires using test voltage up to 2.5 kV optional for MIC-2511



Adapter for measuring insulation resistance

**SONEL AutoISO-5000**

index: WAADAAISO50

**Insulation resistance measurements:**

- » insulation measurement of 3-, 4- and 5-wire cables and wires using test voltage up to 5 kV optional for MIC-10k1, MIC-5050



Probe for measurement of floor and wall resistances

**SONEL PRS-1**

index: WASONPRS1

- » Sonel PRS-1 tripod measuring probe, with the shape of an equilateral triangle, has been manufactured according to the guidelines given in standards HD 60364-6 and EN 1081
- » optional for MIC and MPI meters



Probe for measuring resistance in zones with ESD protection

**SONEL PRS-2 / PRS-2 KIT**

index: WASONPRS2 / WASONPRS2KIT

- » 2x double-sized ring-shape measurement probe (counter-electrode)
- » circular probe (counter-electrode)
- » 2x pressure weight
- » insulating plate
- » 3x test lead 1.2 m
- » test lead 10 m on a reel
- » distance line 25 cm
- » PRS-2 KIT | L-7 carrying case
- » optional for MIC-2511



Set for measuring resistance in zones with ESD protection

**SONEL PRZ-2**

index: WASONPRZ2

- » set: PRS-1 + PRS-2 KIT
- » optional for MIC-2511



**SONEL PRZ-2 MIC**

index: WASONPRZ2MIC

- » set: PRS-1 + PRS-2 + case with space for meter
- » optional for MIC-2511





## SONEL MIC-15k1

index: WMGBMIC15k1

CAT IV  
1000 V

CAT IV  
600 V

IP67

BLUETOOTH

50°C  
HEAVY  
DUTY  
-20°C


15 kV

maximum  
measuring  
voltage

40 TΩ

maximum  
measuring  
range

partial  
discharges  
indicator

remote  
control  
by phone

### Measurement of insulation resistance:

- » up to 40 TΩ,
- » measurement voltages selected within the range of 50...15 000 V,
- » remote start and stop of the measurement via Sonel MIC Mobile application,
- » measurement voltage adjustment during the measurement,
- » measurement of polarization and depolarization currents (PDC),
- » continuous readings of measured insulation resistance and leakage current,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » measurement time setting - up to 99'59",
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1...600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current 1.2 mA, 3 mA, 5 mA or 7 mA,
- » protection against measurement of live object,
- » digital filters for measurements with strong disturbances (10 s, 30 s, 60 s, 100 s, 200 s).

### Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - measurements with lead lengths up to 20 m,
  - measurement of capacitance during measurement of  $R_{ISO}$ ,
  - measurement of leakage current during measurement of  $R_{ISO}$
- » measurement with step voltage (SV),
- » dielectric discharge (DD) test,
- » measurement with RampTest (RT) method,
- » damage location (burning function, current of 11 mA),
- » measurement of surface and volume resistance (Sr),
- » partial discharge indicator,
- » measurement of polarization and depolarization currents (PDC).

### Additional functions of the meters:

- » high immunity to disturbances - in compliance with standard EN 61326,
- » setting the limits of minimal insulation resistance,
- » measurement of direct and alternating voltages within the range of 0...600 V,
- » autosaving the measurement results to the dynamic memory of the device,
- » 990-cell memory (11,880 entries)
- » data transmission to PC via USB connection or Bluetooth®,
- » supports external wireless Bluetooth® keyboard (optional),
- » backlit keyboard and display,
- » power supply from rechargeable battery packs or power grid,
- » charging during measurement,
- » the instrument meets the requirements laid down by standard EN 61557.

## VIRTUAL INSTRUMENTS

We invite you to use the **virtual instruments** application. Thanks to it you can familiarize yourself with features of a selected device, its interface and capabilities.

The application gives you the opportunity to change the selected meter's configuration and perform measurements in a way you would in reality.

[www.sonel.com](http://www.sonel.com) › Knowledge centre › Virtual instrument applications

### Standard accessories:

L4 carrying case	WAFUTL4
W1 hanging straps	WAP0ZSZE5
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, red	WAPRZ003REKRO15KV
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, shielded, black	WAPRZ003BLKROE15KV
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, blue	WAPRZ003BUKRO15KV
USB cable	WAPRZUSB
Mains cable with IEC C13 plug	WAPRZ1X8BLIEC
Factory calibration certificate	

### Measurement of insulation resistance

Measuring range in compliance with EN 61557-2:

$$R_{ISOmin} = \frac{U_{ISONom}}{I_{ISOmax}} = 50 \text{ k}\Omega \dots 40 \text{ T}\Omega \quad (I_{ISOmax} = 1.2 \text{ mA}, 3 \text{ mA}, 5 \text{ mA}, 7 \text{ mA})$$

Display range	Resolution	Accuracy
0...999 kΩ	1 kΩ	±(3% m.v. + 10 digits)
1.00...9.99 MΩ	0.01 MΩ	
10.0...99.9 MΩ	0.1 MΩ	
100...999 MΩ	1 MΩ	
1.00...9.99 GΩ	0.01 GΩ	
10.0...99.9 GΩ	0.1 GΩ	±(3.5% m.v. + 10 digits)
100...999 GΩ	1 GΩ	
1.00...9.99 TΩ	0.01 TΩ	±(7.5% m.v. + 10 digits)
10.0...20.0 TΩ	0.1 TΩ	±(12.5% m.v. + 10 digits)
10.0...40.0 TΩ		

### Values of measured resistance depending on measuring voltage

Display range	Measuring range
50 V	200 GΩ
100 V	400 GΩ
250 V	1.00 TΩ
500 V	2.00 TΩ
1000 V	4.00 TΩ
2500 V	10.0 TΩ
5000 V	20.0 TΩ
10000 V	40.0 TΩ
15000 V	40.0 TΩ

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 1000 V (operating altitude ≤2000 m) acc. to EN 61010-1  
..... CAT IV 600 V (operating altitude ≤3000 m) acc. to EN 61010-1
- » housing protection rating acc. to EN 60529 ..... IP40  
..... (IP67 with closed housing cover)

### Nominal operating conditions:

- » operating temperature range ..... -20...+50°C
- » storage temperature ..... -25...+70°C
- » humidity ..... 20...90%
- » elevation above sea level ..... ≤3000 m
- » reference temperature ..... +23°C ± 2°C
- » reference humidity ..... 40...60%

### Other technical specifications:

- » power supply ..... built-in Li-FePO4 rechargeable battery 13.2 V 5.0 Ah  
..... from network: 90 V ÷ 260 V 50/60 Hz
- » weight ..... approx. 6.6 kg
- » dimensions ..... 390 x 308 x 172
- » transmission of results ..... USB link or Bluetooth®




PDC measurements (Sonel MIC Mobile)




For all operating conditions



Supported by a mobile application

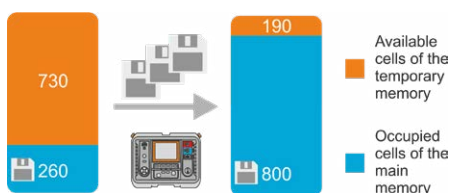

Static and dynamic memory of measurements

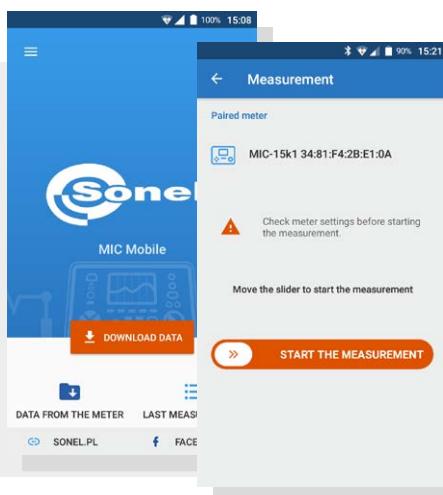

## Application

MIC-15k1 meter is designed to measure insulation resistance of power objects, i.e.:

- » single- and multicore cables,
- » transformers,
- » motors and generators,
- » capacitors, switches and other devices installed in power stations.

It is especially recommended for measurements in areas with very high electromagnetic disturbances, e.g. electrical substations with **1200 kV AC** and **800 kV DC**. Thanks to the 15 kV\* measuring voltage (in accordance with ANSI / NETA ATS-2009 TABLES 100.1) the meter can be used for measuring objects with a nominal voltage above 34.5 kV.

\*The measuring voltage equals  $15\text{ kV} \pm 10\%$ , which gives max. 16,5 kV.

## Capabilities of the device

Highly efficient HV inverter, with test voltage of **15 kV** and current **up to 10 mA**,

suitable for measuring the insulation resistance **up to 40 TΩ**. Achieving such a result makes these meters unrivalled devices. Three-wire resistance measurement, performed using a "GUARD" wire, eliminates surface leakage currents caused by contaminated insulation, thereby increasing the reliability of obtained results.

The meter indicates the Dielectric Absorption Ratio **DAR**, Polarization Index **PI** and the value of Dielectric Discharge **DD** (measurement time **60...5999 s**).

The device allows user to assess the condition of the insulation, by applying the test voltage incrementally in steps (SV - Step Voltage) or smoothly (RampTest - RT).

- » SV method ensures that a dielectric in good condition will provide the same results, regardless of the applied voltage.
- » RT method allows to determine the characteristics of the insulating material. The meter smoothly increases the measuring voltage without exposing the object to so-called electrical stress. It records the time and voltage value at which the electrical breakdown of the insulation took place.

Built-in **digital filters**, with averaging time of 10, 30, 60, 100, 200 sec. guarantee stable measurement results in areas of strong electromagnetic interference.

## Burnout

A very useful solution is the function that allows to Burnout the damaged object. In case of **exposed cables**, it enables **visual identification** of the fault location. In the case of shielded cables, the method allows to generate a **seismic-acoustic wave** from the place of damage.

In special conditions, an energetic discharge will appear cyclically. By using the geophone it will be possible to precisely pinpoint the place where such a discharge occurs.

Burnout feature allows also locating transient faults (appearing, for example, only during rainfall) with the support of reflectometry, and in case of a short circuit (of a screen or return wire) to the ground - applying the method of measuring voltage drop (the A-frame).

## Autosaving the measurement results

The device automatically saves the measurement results. The number of autosave points depends on the amount of data, which is saved within the main memory.

## Data analysis

The **Sonel MIC Mobile** mobile app allows to observe the results during the measurement. The application can generate real-time graphs in various configurations. This allows to evaluate the condition of the object already during the tests.

**The option of remote start and stop of the measurement is particularly useful.** Thanks to it, the tests can be carried out remotely, eg. from a different room or inside the car, when there are difficult weather conditions for the user. Using the phone GPS, it is possible to precisely determine the place of measurement.

Thanks to the mobile application and the **Sonel Reader** software, the user can store previous measurements data and compare them with current results transferred from the meter's extensive memory. This solution allows to prepare a measurement report, track the progress of insulation degradation and plan renovation works.

# SONEL MIC MOBILE



Mobile version of the program cooperating with insulation resistance meters: **MIC-15k1**, **MIC-10k1**, **MIC-5050**, **MIC-5010**, **MIC-5005**.

With the application, you can **connect directly to the device** via Bluetooth and download measurement data from the meter. After reading the measurements from the device, they can be easily and quickly **viewed**, and also **sent from the place of measurement** to the person who can help in the interpretation of data or make a measurement report. Additional functionalities will be useful: assigning a photo, text or voice note to a given measurement.

There is a possibility to start and stop the measurement remotely. You can also convert the **k20 temperature coefficient**. The application can be downloaded from **Google Play**.

## SONEL MIC-10k1 / MIC-5050

index: WMGBMIC10K1 / WMGBMIC5050



### Measurement of insulation resistance:

- » MIC-10k1 | up to 40 TΩ,
- » MIC-5050 | up to 20 TΩ,
- » measurement voltages selected within the range of:
  - MIC-10k1 | 50...10 000 V: 50...1000 V in steps of 10 V, 1...10 kV in steps of 25 V,
  - MIC-5050 | 50...5000 V: 50...1000 V in steps of 10 V, 1...5 kV in steps of 25 V,
- » remote start and stop of the measurement via Sonei MIC Mobile application,
- » charts plotted on display during measurements,
- » correction of insulation resistance result to reference temperature,
- » continuous readings of measured insulation resistance and leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » measurement time setting - up to 99'59",
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1...600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current 1.2 mA, 3 mA or 6 mA,
- » protection against measurement of live object,
- » digital filters for measurements with strong disturbances (10 s, 30 s, 60 s).

### Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - measurements with lead lengths up to 20 m,
  - automatic measurement of all resistance combinations of 3-, 4- and 5-core cords and power cords by means of the optional **AutoISO-5000** adapter (for MIC-10k1 at voltage up to 5 kV),
  - measurement of capacitance during measurement of  $R_{ISO}$ ,
  - measurement of leakage current during measurement of  $R_{ISO}$ ,
- » measurement with step voltage (SV),
- » dielectric discharge (DD) test,
- » damage location (burning function, current of 6 mA),
- » low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ).

### Additional functions of the meters:

- » high immunity to disturbances - in compliance with standard EN 61326,
- » stable measurement in 765 kV substations
- » adjustable limits of minimum insulation resistance  $R_{SO}$  and maximum resistance  $R_{CONT}$ ,
- » **temperature measurement (with the use of the optional ST-1 temperature probe)**,
- » measurement of direct and alternating voltages within the range of 0...750 V,
- » memory storing up to 10,000 results of each type of measurement, including descriptions of measurement points, objects, client names,
- » data transmission to PC via USB connection, Bluetooth® or capability of data transfer via USB flash drives,
- » easy-to-read, backlit 5.6" LCD graphic display,
- » backlit keyboard,
- » power supply from rechargeable battery packs or power grid,
- » charging during measurement,
- » the instrument meets the requirements laid down by standard EN 61557.

## VIRTUAL INSTRUMENTS

We invite you to use the **virtual instruments** application. Thanks to it you can familiarize yourself with features of a selected device, its interface and capabilities.

The application gives you the opportunity to change the selected meter's configuration and perform measurements in a way you would in reality.

[www.sonei.com](http://www.sonei.com) › Knowledge centre › Virtual instrument applications

### Standard accessories:

L4 carrying case	WAFUTL4
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, red	WAPRZ003REKRO15KV
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, shielded, black	WAPRZ003BLKROE15KV
Test lead 15 kV 3 m CAT IV 1000 V with crocodile clip, blue	WAPRZ003BUKRO15KV
USB cable	WAPRZUSB
Mains cable with IEC C13 plug	WAPRZ1X8BLIEC
Factory calibration certificate	

### Measurement of insulation resistance

Measuring range in compliance with EN 61557-2:

$$R_{ISOmin} = \frac{U_{ISOnom}}{I_{ISOmax}} = 5 \text{ M}\Omega \dots 40 \text{ T}\Omega \quad (I_{ISOmax} = 1.2 \text{ mA, } 3 \text{ mA or } (6 \pm 15\%) \text{ mA})$$

Display range	Resolution	Accuracy
0...999 kΩ	1 kΩ	±(3% m.v. + 10 digits)
1.00...9.99 MΩ	0.01 MΩ	
10.0...99.9 MΩ	0.1 MΩ	
100...999 MΩ	1 MΩ	
1.00...9.99 GΩ	0.01 GΩ	
10.0...99.9 GΩ	0.1 GΩ	±(3.5% m.v. + 10 digits)
100...999 GΩ	1 GΩ	
1.00...9.99 TΩ	0.01 TΩ	±(7.5% m.v. + 10 digits)
MIC-5050   10.0...20.0 TΩ	0.1 TΩ	±(12.5% m.v. + 10 digits)
MIC-10k1   10.0...40.0 TΩ		

### Values of measured resistance depending on measuring voltage

Display range	Measuring range	Measuring range for AutoISO-5000
50 V	200 GΩ	20.0 GΩ
100 V	400 GΩ	40.0 GΩ
250 V	1.00 TΩ	100 GΩ
500 V	2.00 TΩ	200 GΩ
1000 V	4.00 TΩ	400 GΩ
2500 V	10.0 TΩ	400 GΩ
5000 V	20.0 TΩ	400 GΩ
MIC-10k1   10000 V	40.0 TΩ	-

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 600 V (CAT III 1000 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP40 (IP67 with closed housing cover)


### Nominal operating conditions:

- » operating temperature range ..... -20...+50°C
- » storage temperature ..... -25...+70°C
- » humidity ..... 20...90%
- » elevation above sea level .....  $\leq 3000$  m
- » reference temperature ..... +23°C  $\pm$  2°C
- » reference humidity ..... 40...60%

### Other technical specifications:

- » power supply ..... built-in Li-Ion rechargeable battery 13.2 V 5.0 Ah from network: 90 V  $\div$  260 V 50/60 Hz
- » weight ..... approx. 6.1 kg
- » dimensions ..... 390 x 308 x 172 mm
- » display ..... graphic LCD 5.6"
- » transmission of results ..... USB link or Bluetooth®



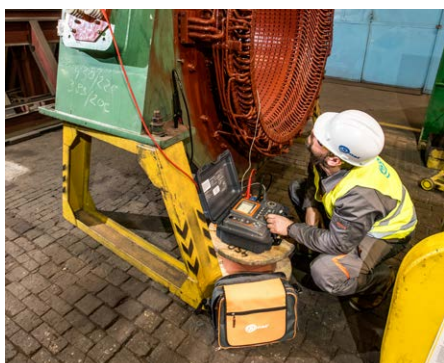


Professional diagnostic tool



Designed for the most demanding objects



Several measurements in one connection

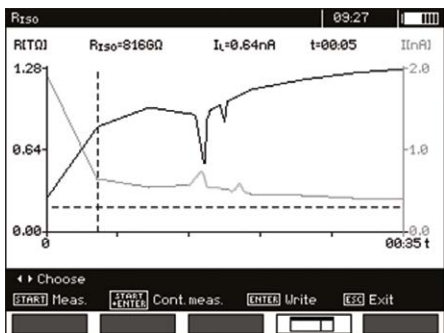

Graphic interpretation of results

## Application

MIC-10k1 / MIC-5050 meter is designed to measure the insulation resistance of electro-power objects, i.e. single- and multi-core cables, transformers, motors and generators, capacitors, switches and other devices installed in power stations. Furthermore, it is dedicated for measurements in areas with very high electromagnetic disturbances, e.g. electrical substations with 765 kV voltage or higher.

## Features of the device

Highly efficient HV inverter, with test voltage of 10 kV (MIC-10k1) / 5 kV (MIC-5050) and current of 6 mA, suitable for measuring the insulation resistance up to 40 TΩ (MIC-10k1) / 20 TΩ (MIC-5050). Achieving such a result makes these meters unrivalled devices. Three-wire resistance measurement, performed using a "GUARD" wire, eliminates surface leakage currents caused by contaminated insulation, thereby increasing the reliability of obtained results.

The meter measures temperature of tested object, which is necessary to determine the temperature correction factor for  $R_{iso}$ . In addition, it indicates the absorption coefficient (DAR - Dielectric Absorption Ratio), Polarization Index (PI) and the value of Dielectric Discharge (DD). The device allows user to assess the condition of the insulation, by applying the test voltage incrementally in steps (SV). This solution ensures that a dielectric in good condition will provide the same results, regardless of the applied voltage. Deviations in obtained resistance values of approx. 25%, observed on the chart in the individual steps, may indicate the potential insulation defects.

MIC-10k1 / MIC-5050 has the unique ability to perform measurements on multi-core cables, within one connection step, using the AutolSO-5000 adapter. This solution reduces the duration of measurements on repetitive of objects, such as cables of street lighting systems. Inverter with a power of almost 60 W (MIC-10k1) / 30 W (MIC-5050) is able to intensify the point of cable damage, which facilitates finding the location of the fault using a reflectometric method e.g. with TDR-420 device.

Built-in digital filters, with averaging time of 10, 30, 60, 100, 200 sec. and "smart" solution guarantee stable measurement results in areas of strong electromagnetic interference.

## Data analysis

The device, with its backlight graphical screen may display a waveform of insulation resistance, voltage and current as a function of time. The operator, basing on the trend shown by the waveform, may quickly assess the insulation condition right after starting the measurement. This provides full control over the tested object and clear image of the tested insulation. In addition, with movable tags, the operator may trace the course of the measurement and check resistance values obtained for any time of the current measurement and of measurements made in the past.

After installing mobile application or Sonel Reader software, the user can collect historical data and compare it with current results, transferred from the extensive memory of the meter. This solution helps user to prepare a measurements report, track the insulation degradation and plan the maintenance / repair works.

## Comparison of meters

	MIC-10k1	MIC-5050
maximum measuring voltage	10 000 V	5000 V
maximum measuring range	40 TΩ	20 TΩ
resistance to external interference voltages	up to 1550 V	up to 1550 V
resistance to interference currents	up to 8 mA	up to 8 mA
advanced, digital interference filtration	10 / 30 / 60 / 100 / 200 seconds and SMART	10 / 30 / 60 / 100 / 200 seconds and SMART
test leads lock	✓	✓



## SONEL MIC-5010 / MIC-5005

index: WMGBMIC5010 / WMGBMIC5005


**15 TΩ**

maximum  
measurement  
range

### Measurement of insulation resistance:

- » measurement voltage selected within the range of **50...5000 V**: 50...1000 V selected in steps of 10 V, 1000 V...5000 V selected in steps of 25 V,
- » **remote start and stop of the measurement** via Sonel MIC Mobile application,
- » continuous reading of measured insulation resistance or leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » measurement time setting - up to 99'59",
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1...600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current **1.2 mA or 3 mA**,
- » protection against measurement of live objects,
- » digital filters for measurements with strong disturbances (**10 s, 30 s, 60 s**).

### Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - measurements with lead lengths up to 20 m,
  - measurement of capacitance during measurement of  $R_{ISO}$ ,
  - measurement of leakage current during measurement of  $R_{ISO}$ ,
- » measurement with step voltage (SV),
- » dielectric discharge (DD) test,
- » **MIC-5010** | low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ).

### Additional functions of the meters:

- » high immunity to disturbances - in compliance with standard EN 61326,
- » adjustable limits of minimum insulation resistance  $R_{ISO}$  and maximum resistance  $R_{CONT}$ ,
- » measurement of direct and alternating voltages within the range of 0...600 V,
- » 990-cell memory (11,880 entries) with the capability of wireless data transmission to a PC (via Bluetooth® or via USB cable),
- » power supply from rechargeable battery packs, built-in quick charger,
- » backlit keyboard and display,
- » instruments meet the requirements laid down by standard EN 61557.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 600 V (CAT III 1000 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP40 (IP67 with closed housing cover)

### Nominal operating conditions:

- » operating temperature range ..... -20...+50°C
- » storage temperature ..... -25...+70°C
- » humidity ..... 20%...90%
- » elevation above sea level .....  $\leq 3000$  m
- » reference temperature ..... +23°C  $\pm$  2°C
- » reference humidity ..... 40...60%

### Other technical specifications:

- » power supply of the meter ..... built-in LiFePO4 rechargeable battery 13.2 V 5.0 Ah
- » weight ..... approx. 6.0 kg
- » dimensions ..... 390 x 308 x 172 mm
- » display ..... segmented LCD
- » transmission of results ..... USB link or Bluetooth®

### Standard accessories:

L4 carrying case	WAFUTL4
Crocodile clip, black, 11 kV, 32 A	WAKROBL32K09
Crocodile clip, red, 11 kV, 32 A	WAKRORE32K09
Crocodile clip, blue, 11 kV, 32 A	WAKROBU32K09
Test lead 1.8 m, black, 11 kV (banana plugs, shielded)	WAPRZ1X8BLBBE10K
Test lead 1.8 m, red, 11 kV (banana plugs)	WAPRZ1X8REBB10K
Test lead 1.8 m, blue, 11 kV (banana plugs)	WAPRZ1X8BUBB10K
USB cable	WAPRZUSB
Mains cable with IEC C13 plug	WAPRZ1X8BLIEC
Pin probe, black 11 kV (banana socket)	WASONBLOGB11
Pin probe, red 11 kV (banana socket)	WASONREOGB11
W1 hanging straps	WAPOZSZE5
Factory calibration certificate	

### Measurement of insulation resistance

Measuring range in compliance with EN 61557-2:

$$R_{ISOmin} = \frac{U_{ISONom}}{I_{ISOmax}} = 50 \text{ k}\Omega \dots 15 \text{ T}\Omega \quad (I_{ISOmax} = 1.2 \text{ mA or } 3 \text{ mA})$$

Display range	Resolution	Accuracy
0...999 kΩ	1 kΩ	±(3% m.v. + 10 digits)
1.00...9.99 MΩ	0.01 MΩ	
10.0...99.9 MΩ	0.1 MΩ	
100...999 MΩ	1 MΩ	
1.00...9.99 GΩ	0.01 GΩ	±(3.5% m.v. + 10 digits)
10.0...99.9 GΩ	0.1 GΩ	
100...999 GΩ	1 GΩ	±(7.5% m.v. + 10 digits)
1.00...9.99 TΩ	0.01 TΩ	±(10% m.v. + 10 digits)
10.0...15.0 TΩ	0.1 TΩ	

- » Temperature stability of voltage better than 0.2% /°C



The MIC-10k1, MIC-5050, MIC-5010 and MIC-5005 meters are capable of operating in the presence of very large disturbances at substations and switching stations.

### Values of measured resistance depending on measuring voltage

Voltage	Measured resistance
250 V	500 GΩ
500 V	1.00 TΩ
1000 V	2.00 TΩ
2500 V	5.00 TΩ
5000 V	15.0 TΩ

### MIC-5010 | Test of the continuity of protective conductors and equipotential bonding with current >200 mA

Measuring range according to EN 61557-4: 0.12...999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...999 Ω	1 Ω	±(4% m.v. + 3 digits)

- » Voltage on open terminals: 4...24 V
- » Output current at  $R < 15 \Omega$ :  $I_{min} > 200$  mA ( $I_{sc}$ : 200...250 mA)
- » Compensation of test lead resistance
- » Current flows in two directions, mean resistance value displayed

### Capacitance measurement

Display range	Resolution	Accuracy
1...999 nF	1 nF	±(5% m.v. + 5 digits)
1.00...49.99 μF	0.01 μF	

- » Capacitance measurement result displayed after measurement of  $R_{ISO}$

"m.v." = "measured value"

### Instruments meet the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



# SONEL MIC-5001

index: WMGBMIC5001

**CAT III**  
**600 V**

**CAT IV**  
**300 V**

**IP65**



## Measurement of insulation resistance:

- » measurement voltage within the range of **50...5000 V**: 50...500 V selected in steps of 50 V, 500...5000 V selected in steps of 100 V,
- » continuous reading of measured insulation resistance or leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1... 600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current **1.5 mA**,
- » protection against measurement of live objects,
- » two- or three-lead method of insulation resistance measurement.

## Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - measurement of leakage current during measurement of  $R_{ISO}$
- » measurement with RampTest (RT) method.

## Additional functions of the meter:

- » measurement of direct and alternating voltages within the range of 0...750 V,
- » 990-cell memory (11,880 entries), data transmission to PC via USB cable,
- » power supplied by rechargeable battery,
- » the meter can be powered and charged from an external power adapter or from a car lighter socket,
- » backlit display,
- » instruments meet the requirements laid down by standard EN 61557.

## Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and IEC 61557
- » measurement category ..... CAT IV 600 V (CAT III 1000 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65

## Other technical specifications:

- » power supply of the meter ..... SONEL NIMH LSD 9.6 V 2 Ah rechargeable battery pack  
..... 12 V, 2.5 A external power supply
- » meter weight ..... approx. 0.9 kg
- » dimensions ..... 200 x 180 x 77 mm
- » display ..... segmented LCD
- » memory ..... 990 cells, 11,880 entries
- » transmission of results ..... USB
- » operating humidity ..... 20...90%

## Standard accessories:

M-8 carrying case	WAFUTM8
Black "crocodile" clip 11 kV 32 A	WAKROBL32K09
Red "crocodile" clip 11 kV 32 A	WAKRORE32K09
Blue "crocodile" clip 11 kV 32 A	WAKROBU32K09
Shielded test lead with banana plugs; 5 kV; 1.8 m; black	WAPRZ1X8BLBB
Test lead with banana plugs; 5 kV; 1.8 m; red	WAPRZ1X8REBB
Test lead with banana plugs; 5 kV; 1.8 m; blue	WAPRZ1X8BUBB
USB data transmission cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Test probe with banana socket; 5 kV; black	WASONBLOGB2
Test probe with banana socket; 5 kV; red	WASONREOGB2
Meter power adapter (type Z7)	WAZASZ7
Factory calibration certificate	

## Insulation resistance measurement (two-lead)

Measuring range according to IEC 61557-2:

$$R_{ISOmin} = \frac{U_{ISONom}}{I_{ISOmax}} \leq 5 T \Omega \quad (I_{ISONom} = 1 \text{ mA})$$

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(3% m.v. + 20 digits)
1.000...9.999 MΩ	0.001 MΩ	
10.00...99.99 MΩ	0.01 MΩ	
100.0...999.9 MΩ	0.1 MΩ	
1.000...9.999 GΩ	0.001 GΩ	
10.00...99.99 GΩ	0.01 GΩ	±(4% m.v. + 50 digits)
100.0...999.9 GΩ	0.1 GΩ	
1.000...5.000 TΩ	1 GΩ	

## Measured resistance values depending on measurement voltage

Voltage $U_{ISO}$	Measuring range
up to 100 V	50 GΩ
200...400 V	100 GΩ
500...900 V	250 GΩ
1000...2400 V	500 GΩ
2500 V	2500 GΩ
5000 V	5000 GΩ

## Insulation resistance measurement in Ramp Test mode

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(5% m.v. + 40 digits)
1.000...9.999 MΩ	0.001 MΩ	
10.00...99.99 MΩ	0.01 MΩ	
100.0...999.9 MΩ	0.1 MΩ	
1.000...9.999 GΩ	0.001 GΩ	
10.00...99.99 GΩ	0.01 GΩ	
100.0...999.9 GΩ	0.1 GΩ	
1.000...4.999 TΩ	0.001 TΩ	

## Breakdown voltage measurement in Ramp Test mode

Range	Resolution	Selected $U_{ISO}$	Accuracy
25.0 ... 99.0 V	0.1 V	≤600 V	±(5% m.v. + 10 digits)
100 ... 600 V	1 V	≤600 V	±(5% m.v. + 4 digits)
25 ... 999 V	1 V	>600 V	±(5% m.v. + 5 digits)
1.00 ... 5.00 kV	10V	>600 V	±(5% m.v. + 4 digits)

## Measurement of direct and alternating voltage

Range	Resolution	Accuracy
0...299.9 V	0.1 V	±(3% m.v. + 2 digits)
300...750 V	1 V	

- » frequency range: 45...65 Hz





## SONEL MIC-2511



### SPD

testing surge protecting devices

### Choose the best set for your needs

#### MIC-2511 EPA

Insulation resistance meter **with set for measurements in EPA zones**

index: WMGBMIC2511EPA

#### MIC-2511

Insulation resistance meter

index: WMGBMIC2511

The meter is a part of the **Sonel MeasureEffect™** platform. It is a comprehensive system that enables you to take measurements, store and manage data, and provides multi-level control of your instruments.



### Measurement of insulation resistance:

- » measurement voltage within the range of **10...2500 V**:
  - selected from 10 V, 25 V, 100 V, 250 V, 500 V, 1000 V, 2500 V,
  - 10...2500 V selected in steps of 10 V or any value (e.g., 1918 V),
- » insulation resistance measurements with a voltage of 10 V of the supervisory loop of fire alarm systems,
- » testing surge protecting devices (SPD AC/DC) distinguished by type: varistor / spark gap,
- » **charts plotted on display during measurements**,
- » measurements in electrostatic protected areas (EPA),
- » **correction of insulation resistance result to reference temperature**,
- » continuous reading of measured insulation resistance or leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients ( $Ab_1$ ,  $Ab_2$  or DAR, PI) within the range of 1... 600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current  $\leq 2$  mA,
- » protection against measurement of live objects.

### Measurement functions:

- » visual test,
- » insulation resistance measurement:
  - two- or three-lead method,
  - capacitance measurement during measurement of  $R_{ISO}$ ,
  - measurement of leakage current during measurement of  $R_{ISO}$ ,
- » measurement with step voltage (SV),
- » dielectric discharge (DD) test,
- » measurement with RampTest (RT) method,
- » separate functions for measuring DAR and PI coefficients,
- » low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ),
- » low-voltage measurement of resistance ( $R_X$ ).

### Additional functions of the meter:

- » adjustable limits of minimum and maximum resistance,
- » **temperature measurement (with the use of the optional ST-1 temperature probe)**,
- » measurement of direct and alternating voltages within the range of 0...1500 V,
- » 9999-entry memory, data transmission to PC via USB cable,
- » power supplied by rechargeable battery,
- » backlit keyboard,
- » the instrument meets the requirements laid down by standard EN 61557.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 600 V (CAT III 1000 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65

### Other technical specifications:

- » power supply of the meter ..... Li-Ion 10.8 V 3.5 Ah rechargeable battery
- » weight ..... ca. 1.3 kg
- » dimensions ..... 234 x 169 x 70 mm
- » display ..... LCD 5" 800 x 480
- » memory ..... 9999 entries
- » transmission of results ..... USB

### Measurement of insulation resistance

Measuring range acc. to EN 61557-2 for  $R_{ISOmin} = \frac{U_{ISOnom}}{I_{ISOmax}} \leq 2 TQ$   
( $I_{ISOmax} = 1.6$  mA)

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(3% m.v. + 20 digits)
1.000...9.999 MΩ	0.001 MΩ	
10.00...99.99 MΩ	0.01 MΩ	
100.0...999.9 MΩ	0.1 MΩ	
1.000...9.999 GΩ	0.001 GΩ	
10.00...99.99 GΩ	0.01 GΩ	
100.0...999.9 GΩ	0.1 GΩ	
1.000...2.000 TΩ	0.001 TΩ	

### Values of measured resistance depending on measuring voltage

Voltage	Measured resistance
10 V	10 GΩ
25 V	20 GΩ
50 V	50 GΩ
100 V	100 GΩ
250 V	250 GΩ
500 V	500 GΩ
1000 V	1,00 TΩ
2500 V	2,00 TΩ

### Capacitance measurement

Display range	Resolution	Accuracy
0...999 nF	1 nF	±(5% m.v. + 5 digits)
1.00...9.99 μF	0.01 μF	

### Test of the continuity of protective conductors and equipotential bonding with 200 mA current

Measuring range according to EN 61557-4: 0.10...999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...999 Ω	1 Ω	±(4% m.v. + 3 digits)

### Measurement of direct and alternating voltage

Display range	Resolution	Accuracy
0...1500 V	1 V	±(3% m.v. + 2 digits)

- » frequency range: 45...65 Hz

**Standard accessories:**

		MIC-2511 EPA	MIC-2511
		WMGBMIC2511EPA	WMGBMIC2511
Kit for measuring resistance in zones with ESD protection with space for meter	WASONPRZ2MIC	✓	
Li-Ion 10.8 V 3.5 Ah rechargeable battery	WAAKU29	✓	✓
M-6 carrying case	WAFUTM6		✓
Black "crocodile" clip 11 kV 32 A	WAKROBL32K09	✓	✓
Red "crocodile" clip 11 kV 32 A	WAKRORE32K09	✓	✓
Blue "crocodile" clip 11 kV 32 A	WAKROBU32K09	✓	✓
Shielded test lead with banana plugs; 5 kV; 1.8 m; black	WAPRZ1X8BLBB	✓	✓
Test lead with banana plugs; 5 kV; 1.8 m; red	WAPRZ1X8REBB	✓	✓
Test lead with banana plugs; 5 kV; 1.8 m; blue	WAPRZ1X8BUBB	✓	✓
USB data transmission cable	WAPRZUSB	✓	✓
230 V mains cable (IEC C7 plug)	WAPRZLAD230	✓	✓
Test probe with banana socket; 5 kV; black	WASONBLOGB2	✓	✓
Test probe with banana socket; 5 kV; red	WASONREOGB2	✓	✓
Hanging strap	WAPOZPAS6	✓	✓
Type C USB cable	WAPRZUSBC	✓	✓
Meter power adapter (type Z32)	WAZASZ32	✓	✓
Factory calibration certificate		✓	✓



Kit for measuring resistance in zones with ESD protection with space for meter



## SONEL MIC-2501

index: WMGBMIC2501



### Measurement of insulation resistance:

- » measurement voltage within the range of **100...2500 V**: 100...2500 V selected in steps of 100 V,
- » continuous reading of measured insulation resistance or leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1... 600 s,
- » reading of actual measurement voltage during measurement,
- » measurement current **1 mA**,
- » protection against measurement of live objects.

### Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - measurement of leakage current during measurement of  $R_{ISO}$ ,
- » low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ).

### Additional functions of the meter:

- » measurement of direct and alternating voltages within the range of 0...750 V,
- » 990-cell memory (11,880 entries), data transmission to PC via USB cable,
- » power supplied by rechargeable battery,
- » the meter can be powered and charged from an external power adapter or from a car lighter socket,
- » backlit display,
- » the instrument meets the requirements laid down by standard EN 61557.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 600 V (CAT III 1000 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65

### Other technical specifications:

- » power supply of the meter ..... SONEI NiMH LSD 9.6 V rechargeable battery pack  
external power supply 12 V, 2.5 A
- » meter weight ..... approx. 0.9 kg
- » dimensions ..... 200 x 180 x 77 mm
- » display ..... segmented LCD
- » memory ..... 990 cells, 11,880 entries
- » transmission of results ..... USB

### Standard accessories:

M-8 carrying case	WAFUTM8
Black "crocodile" clip 11 kV 32 A	WAKROBL32K09
Red "crocodile" clip 11 kV 32 A	WAKRORE32K09
Blue "crocodile" clip 11 kV 32 A	WAKROBU32K09
Shielded test lead with banana plugs; 5 kV; 1.8 m; black	WAPRZ1X8BLBB
Test lead with banana plugs; 5 kV; 1.8 m; red	WAPRZ1X8REBB
Test lead with banana plugs; 5 kV; 1.8 m; blue	WAPRZ1X8BUBB
USB data transmission cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Test probe with banana socket; 5 kV; black	WASONBLOGB2
Test probe with banana socket; 5 kV; red	WASONREOGB2
Meter power adapter (type Z7)	WAZASZ7
Factory calibration certificate	

### Measurement of insulation resistance

Measuring range acc. to EN 61557-2 for  $R_{ISOmin} = \frac{U_{ISONom}}{I_{ISONom}} \leq 1 TQ$   
( $I_{ISONom} = 1$  mA)

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(3% m.v. + 20 digits)
1.000...9.999 MΩ	0.001 kΩ	
10.00...99.99 MΩ	0.01 kΩ	
100.0...999.9 MΩ	0.1 kΩ	
1.000...9.999 GΩ	0.001 GΩ	
10.00...99.99 GΩ	0.01 GΩ	
100.0...999.9 GΩ	0.1 GΩ	

"m.v." = "measured value"

$U_{ISO}$  - measurement voltage.

### Values of measured resistance depending on measuring voltage

Voltage	Measured resistance
up to 100 V	50 GΩ
200...400 V	100 GΩ
500...900 V	250 GΩ
1000...2400 V	500 GΩ
2500 V	1000 GΩ



You can charge the meter during the measurement using any Power Bank 12 V / 2 Ah with a 5.5 mm / 2.1 mm power supply.

### Test of the continuity of protective conductors and equipotential bonding with 200 mA current

Measuring range according to EN 61557-4: 0.10...999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...999 Ω	1 Ω	±(4% m.v. + 3 digits)

- » Voltage on open terminals: 4...24 V
- » Output current at  $R < 2 \Omega$ :  $I_{SC} > 200$  mA
- » Compensation of test lead resistance
- » Current flows in two directions, mean resistance value displayed

### Measurement of direct and alternating voltage

Display range	Resolution	Accuracy
0...299.9 V	0.1 V	±(3% m.v. + 2 digits)
300...750 V	1 V	

- » frequency range: 45...65 Hz



**SONEL MIC-30**

index: WMGBMIC30

**Measurement of insulation resistance:**

- » measurement voltage within the range of **50...1000 V**: selected from 50, 100, 250, 500, 1000 V or 50...1000 V selected in steps of 10 V,
- » continuous reading of measured insulation resistance or leakage current,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » timing of measurement times  $T_1$ ,  $T_2$  and  $T_3$  for measurement of one or two absorption coefficients ( $Ab_1$ ,  $Ab_2$  or  $DAR$ ,  $PI$ ) within the range of 1... 600 s,
- » readings of actual measurement voltage during measurement,
- » measurement current **1 mA**,
- » protection against measurement of live objects.

**Measurement functions:**

- » insulation resistance measurement:
  - two- or three-lead method,
  - automatic measurement in sockets by means of UNI-Schuko adapter with the capability of configuring pairs of measured conductors,
  - capacitance measurement during measurement of  $R_{ISO}$ ,
  - measurement of leakage current during measurement of  $R_{ISO}$ ,
- » low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ),
- » low-voltage measurement of resistance ( $R_X$ ).

**Additional functions of the meter:**

- » measurement of direct and alternating voltages within the range of 0...600 V,
- » 990-cell memory (11,880 entries) with the capability of wireless data transmission to a PC via Bluetooth®,
- » backlit keyboard and display,
- » the instrument meets the requirements laid down by standard EN 61557.

**Other technical specifications:**

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... 4 LR6 batteries or Ni-MH AA rechargeable batteries
- » display ..... segmented LCD

**The instrument meets the requirements set forth in the standards:**

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



MIC-30 makes it possible to perform automatic resistance measurement for all combinations or for any pair of conductors in the socket.

**Standard accessories:**

M-6 carrying case	WAFUTM6
Blue "crocodile" clip 1 kV 20 A	WAKROBU20K02
Shielded test lead with banana plugs; 1 kV; 1.2 m; black	WAPRZ1X2BLBBE
Test lead with banana plugs; 1 kV; 1.2 m; red	WAPRZ1X2REBB
Test lead with banana plugs; 1 kV; 1.2 m; blue	WAPRZ1X2BUBB
Test probe with banana socket; 1 kV; black	WASONBLOGB1
Test probe with banana socket; 1 kV; red	WASONREOGB1
Meter strap (type M-1)	WAPOZSZE4
M-1 housing holder - hanger	WAPOZUCH1

Factory calibration certificate

**Measurement of insulation resistance**

Measuring range according to EN 61557-2 for

- »  $Un=50$  V: **50 k $\Omega$ ...250.0 M $\Omega$**
- »  $Un=100$  V: **100 k $\Omega$ ...500.0 M $\Omega$**
- »  $Un=250$  V: **250 k $\Omega$ ...2.000 G $\Omega$**
- »  $Un=500$  V: **500 k $\Omega$ ...20.00 G $\Omega$**
- »  $Un=1000$  V: **1000 k $\Omega$ ...100.0 G $\Omega$**

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(3% m.v. + 8 digits) [±(5% m.v. + 8 digits)]*
1.000...9.999 MΩ	0.001 MΩ	
10.00...99.99 MΩ	0.01 MΩ	
100.0...250.0 MΩ   U <sub>n</sub> = 50 V	0.1 MΩ	
100.0...500.0 MΩ   U <sub>n</sub> = 100 V		
100.0...999.9 MΩ   U <sub>n</sub> ≥ 250 V		
1.000...2.000 GΩ   U <sub>n</sub> = 250 V	0.001 GΩ	±(4% m.v. + 6 digits) [±(6% m.v. + 6 digits)]*
1.000...9.999 GΩ   U <sub>n</sub> ≥ 500 V	0.001 GΩ	
10.00...20.00 GΩ   U <sub>n</sub> ≥ 500 V**	0.01 GΩ	
10.00...99.99 GΩ   U <sub>n</sub> = 1000 V		
100.0 GΩ   U <sub>n</sub> = 1000 V		
100.0 GΩ   U <sub>n</sub> = 1000 V	0.1 GΩ	

\*for WS-04 adapter

\*\*for WS-04 adapter, range up to 10 G $\Omega$ 

- » measurements with voltage up to 500 V for WS-04 lead

**Capacitance measurement**

Display range	Resolution	Accuracy
1...999 nF	1 nF	±(5% m.v. + 10 digits)
1.00...9.99 µF	0.01 µF	

» Capacitance measurement result displayed after measurement of  $R_{SO}$

» For measurement voltages below 100 V and measured resistance of less than 10 MΩ, the error of capacitance measurement is unspecified

**Test of the continuity of protective conductors and equipotential bonding with 200 mA current**Measuring range according to EN 61557-4: 0.10...1999  $\Omega$ 

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
2000...1999 $\Omega$	1 $\Omega$	$\pm(4\% \text{ m.v.} + 3 \text{ digits})$

## SONEL MIC-10

index: WMGBMIC10



CAT III

1000 V

CAT IV

600 V

IP67

### Measurement of insulation resistance:

- » measurement voltage within the range of **50...1000 V**: selected from 50, 100, 250, 500, 1000 V,
- » continuous reading of measured insulation resistance,
- » automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » readings of actual measurement voltage during measurement,
- » measurement current **1 mA**,
- » protection against measurement of live objects.

### Measurement functions:

- » insulation resistance measurement:
  - two- or three-lead method,
  - capacitance measurement during measurement of  $R_{iso}$ ,
- » low-voltage measurement of continuity using current of  $\geq 200$  mA ( $R_{CONT}$ ),
- » low-voltage measurement of resistance ( $R_X$ ).

### Additional functions of the meter:

- » measurement of direct and alternating voltages within the range of 0...600 V,
- » backlit keyboard and display,
- » the instrument meets the requirements laid down by standard EN 61557.



Besides measuring insulation resistance, MIC-10 is capable of performing continuity tests of protective conductors and equipotential bonding in accordance with standard EN 61557.

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... 4 alkaline batteries or Ni-MH rechargeable batteries - size AA
- » display ..... segmented LCD

### Standard accessories:

M-6 carrying case	WAFUTM6
Black "crocodile" clip 1 kV 20 A	WAKROBL20K01
Test lead with banana plugs; 1 kV; 1.2 m; black	WAPRZ1X2BLBB
Test lead with banana plugs; 1 kV; 1.2 m; red	WAPRZ1X2REBB
Test probe with banana socket; 1 kV; black	WASONBLOGB1
Test probe with banana socket; 1 kV; red	WASONREOGB1
Meter strap (type M-1)	WAPZSZE4
M-1 housing holder - hanger	WAPZUCH1
Factory calibration certificate	

### Measurement of insulation resistance

Measuring range according to EN 61557-2 for

- »  $U_n = 50$  V: **50 kΩ...250.0 MΩ**
- »  $U_n = 100$  V: **100 kΩ...500.0 MΩ**
- »  $U_n = 250$  V: **250 kΩ...2.000 GΩ**
- »  $U_n = 500$  V: **500 kΩ...5.000 GΩ**
- »  $U_n = 1000$  V: **1000 kΩ...10.00 GΩ**

Display range	Resolution	Accuracy
0.0...999.9 kΩ	0.1 kΩ	±(3% m.v. + 8 digits)
1.000...9.999 MΩ	0.001 MΩ	
10.00...99.99 MΩ	0.01 MΩ	
100.0...250.0 MΩ   U <sub>n</sub> = 50 V	0.1 MΩ	
100.0...500.0 MΩ   U <sub>n</sub> = 100 V		
100.0...999.9 MΩ   U <sub>n</sub> ≥ 250 V		
1.000...2.000 GΩ   U <sub>n</sub> = 250 V		
1.000...5.000 GΩ   U <sub>n</sub> = 500 V	0.001 GΩ	±(4% m.v. + 6 digits)
1.000...9.999 GΩ   U <sub>n</sub> = 1000 V	0.001 GΩ	
10.00 GΩ   U = 1000 V	0.01 GΩ	

### Capacitance measurement

Display range	Resolution	Accuracy
1...999 nF	1 nF	±(5% m.v. + 10 digits)
1.00...9.99 μF	0.01 μF	

- » Capacitance measurement result displayed after measurement of  $R_{iso}$ ,
- » For measurement voltages below 100 V and measured resistance of less than 10 MΩ, the error of capacitance measurement is unspecified.

### Test of the continuity of protective conductors and equipotential bonding with 200 mA current

Measuring range according to EN 61557-4: 0.10...1999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
2000...1999 Ω	1 Ω	±(4% m.v. + 3 digits)

## Insulation resistance meter

### SONEL MIC-5

index: WMGBMIC5



#### Measurement of insulation resistance:

- » measurement voltage within the range of **250...500 V**: selected from 250, 500 V,
- » continuous indication of measured resistance,
- » automatic discharge of tested object's capacitance after measurement of insulation resistance,
- » sound signalling of five-second time intervals, facilitating capture of time characteristics,
- » measurement current **up to 1.4 mA**,
- » protection against measurement of live objects.

#### Measurement functions:

- » insulation resistance measurement using two-lead method,
- » low-voltage measurement of resistance ( $R_x$ ).

#### Additional functions of the meter:

- » measurement of direct and alternating voltages within the range of 0...600 V,
- » backlit display,
- » the instrument meets the requirements laid down by standard EN 61557.

#### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

#### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ... 2 LR03 alkaline batteries or Ni-MH rechargeable batteries - size AAA
- » display ..... segmented LCD



#### Standard accessories:


Φ4 mm screw tip (set of 4 pcs.)	WAPOZN4MMK
4 mm applied tip (set of 2 pcs.)	WAPOZO4MMK
2x AAA / LR03 alkaline battery	
Declaration of verification	

#### Measurement of insulation resistance

Measuring range according to EN 61557-2 for


- »  $U_n = 250 \text{ V}$ : **250 kΩ...1.000 GΩ**
- »  $U_n = 500 \text{ V}$ : **500 kΩ...1.999 GΩ**

Display range	Resolution	Accuracy
1...249 kΩ   $U_n = 250 \text{ V}$ 1...499 kΩ   $U_n = 500 \text{ V}$	1 kΩ	not defined
250...1999 kΩ   $U_n = 250 \text{ V}$ 500...1999 kΩ   $U_n = 500 \text{ V}$	1 kΩ	±(3% m.v. + 8 digits)
2.00...19.99 MΩ	0.01 MΩ	
20.0...199.9 MΩ	0.1 MΩ	
200...1000 MΩ   $U_n = 250 \text{ V}$ 200...1999 MΩ   $U_n = 500 \text{ V}$	1 MΩ	

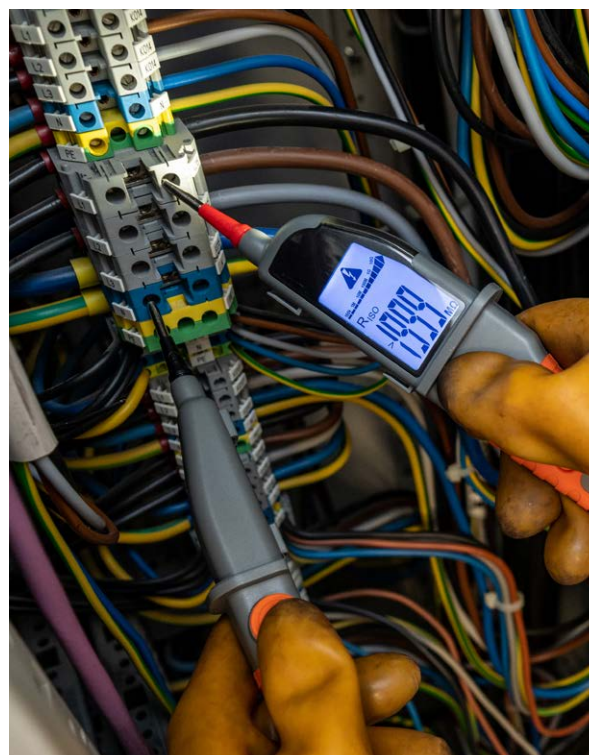



## SONEL MIC-RS

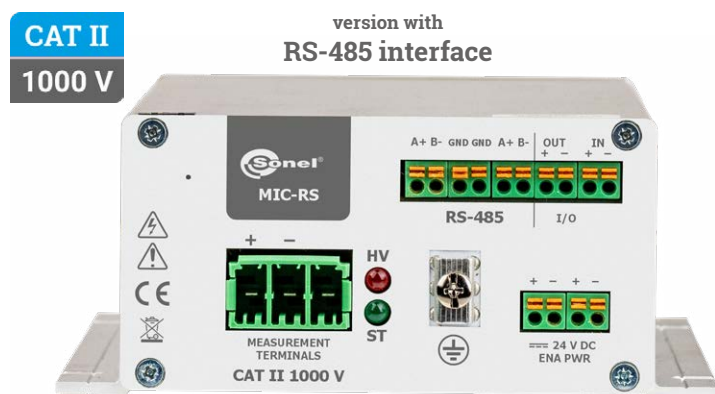
**RS-232 / RS-485**

interface

**MIC-RS-SCP / MODBUS**

communication protocol

### Measurement of insulation resistance:

- » measurement voltage within the range of **50...1000 V**,
- » automatic discharge of tested object's capacitance after measurement of insulation resistance,
- » measurement current  $\leq 2$  mA,
- » protection against measurement of live objects.

### Measurement functions:

- » insulation resistance measurement using two-lead method,
- » low-voltage measurement of resistance ( $R_X$ ).

### Additional functions of the meter:

- » RS-232 or RS-485 interface,
- » data transmission to a controlling device through the MIC-RS-SCP or Modbus communication protocol,
- » external power supply,
- » the instrument meets the requirements laid down by standard EN 61557.

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... basic, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... external, isolated, 24 V DC

### Measurement of insulation resistance

Measuring range according to EN 61557-2 for

- »  $U_n = 500$  V: **500 k $\Omega$ ...2.00 G $\Omega$**
- »  $U_n = 1000$  V: **1000 k $\Omega$ ...9.99 G $\Omega$**

Display range	Resolution	Accuracy
1.00...9.99 k $\Omega$	0.01 k $\Omega$	not defined
10.0...99.9 k $\Omega$	0.1 k $\Omega$	
100...249 k $\Omega$	1 k $\Omega$	
250...999 k $\Omega$	1 k $\Omega$	$\pm(3\% \text{ m.v.} + 8 \text{ digits})$
1.00...9.9 M $\Omega$	0.01 M $\Omega$	
10.0...99.9 M $\Omega$	0.1 M $\Omega$	
100...2000 M $\Omega$	1 M $\Omega$	

### Capacitance measurement

Display range	Resolution	Accuracy
0...9.9 $\mu$ F	0.1 nF	$\pm(5\% \text{ m.v.} + 6 \text{ digits})$

### Choose the best variant for your needs

#### MIC-RS: RS-232, MIC-RS-SCP

Meter with RS-232 interface and MIC-RS-SCP communication protocol  
index: WMGBMICRS232

#### MIC-RS: RS-232, Modbus

Meter with RS-232 interface and Modbus communication protocol  
index: WMGBMICRS232M

#### MIC-RS: RS-485, Modbus

Meter with RS-485 interface and Modbus communication protocol  
index: WMGBMICRS485M

It is possible to prepare a version of the meter with the interface and communication protocol requested by the customer.

### Standard accessories:

Factory calibration certificate

### Application

The instrument is dedicated for companies and sites, in which continuous or random assessment of the insulation resistance is required as part of production. It is also perfect for automated production systems.

The meter can be installed in the distribution board, at the operator's station (assembly or quality control bench), in the control cabinet or even in the rack enclosure. The measurement is performed by means of clamps, used to connect the test leads of the system, in which the instrument is installed.

### Features

The meter is designed for building in/permanent installation. It plays a Secondary/Slave role, meaning that it executes the commands issued by the Main/Master control device and it does not initialise the transmission on its own. It enables measuring the insulation resistance with the test voltage of up to 1000 V.

The scope set of functions of the meter is tailored to specialised applications. With the **AutoRange** function, available in two versions, the instrument can switch the test voltage dynamically and adjust it to the current conditions.

There are two measurement modes available: **automatic** (continuous) and **manual** (one-time). Under automated testing, the meter can be programmed to measure the capacity or not. In addition, **the user may define the default function** of the device as the measurement of insulation resistance ( $R_{iso}$ ), or low resistance ( $R_X$ ).

### Response and communication

The functionality of the instrument is extended by digital input and output. This enables the meter to respond to the events in the system, in which it operates.

The meter is operated from the Main/Master control device by means of the **MIC-RS-SCP serial communication protocol** or **Modbus protocol**. It enables, for example, starting and stopping the measurement of resistance, reading the measurement result or changing the configuration of the instrument.

Photo	Name	Index	MIC-15k1	MIC-10k1	MIC-5050	MIC-5010	MIC-5005	MIC-5001	MIC-2511 EPA	MIC-2511	MIC-2501	MIC-30	MIC-10	MIC-5
	AGT-16C three-phase socket adapter 16 A (PEN)	WAADAAGT16C										•	•	
	AGT-16P three-phase socket adapter 16 A	WAADAAGT16P										•	•	
	AGT-16T industrial socket adapter 16 A	WAADAAGT16T										•	•	
	AGT-32C three-phase socket adapter 32 A (PEN)	WAADAAGT32C										•	•	
	AGT-32P three-phase socket adapter 32 A	WAADAAGT32P										•	•	
	AGT-32T industrial socket adapter 32 A	WAADAAGT32T										•	•	
	AGT-63P three-phase socket adapter 63 A	WAADAAGT63P										•	•	
	AutoISO-2511 adapter	WAADA AIS02511							•	•				
	AutoISO-5000 adapter	WAADA AIS050	•	•										
	WS-04 adapter with UNI-Schuko angular plug	WAADAWS04										•		
	WS-11 adapter (pin probe)	WAADAWS11										•		
	AZ-3 power supply adapter (mains plug/banana sockets)	WAADAAZ3							•	•				
	Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01										•	1	•
	Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02										•	•	•
	Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02										1	•	
	Crocodile clip, black, 11 kV, 32 A	WAKROBL32K09	•	•	1	1	1	1	1	1	1			
	Crocodile clip, red, 11 kV, 32 A	WAKRORE32K09	•	•	1	1	1	1	1	1	1			
	Crocodile clip, blue, 11 kV, 32 A	WAKROBU32K09	•	•	1	1	1	1	1	1	1			
	Test lead 1 kV (banana plugs) black 1.2 m	WAPRZ1X2BLBB											1	
	Test lead 1 kV (banana plugs, shielded) black 1.2 m	WAPRZ1X2BLBBE										1	•	
	Test lead 1 kV (banana plugs, shielded) black 5 m	WAPRZ005BLBBE										•	•	
	Test lead 1 kV (banana plugs) red 1.2 m	WAPRZ1X2REBB										1	1	

## MIC

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories












































Photo	Name	Index	MIC-15k1	MIC-10k1	MIC-5050	MIC-5010	MIC-5005	MIC-5001	MIC-2511 EPA	MIC-2511	MIC-2501	MIC-30	MIC-10	MIC-5
	Test lead 1 kV (banana plugs) red 5 m	WAPRZ005REBB										•	•	
	Test lead 1 kV (banana plugs) blue 1.2 m	WAPRZ1X2BUBB										1	•	
	Test lead 1 kV (banana plugs) blue 5 m	WAPRZ005BUBB										•	•	
	Test lead 5 kV (banana plugs, shielded) black 1.8 m	WAPRZ1X8BLBB						1	1	1	1			
	Test lead 5 kV (banana plugs, shielded) black 3 / 5 / 10 m	WAPRZ003BLBBE5K WAPRZ005BLBBE5K WAPRZ010BLBBE5K						•	•	•	•			
	Test lead 5 kV (banana plugs) red 1.8 m	WAPRZ1X8REBB						1	1	1	1			
	Test lead 5 kV (banana plugs) red 3 / 5 / 10 m	WAPRZ003REBB5K WAPRZ005REBB5K WAPRZ010REBB5K						•	•	•	•			
	Test lead 5 kV (banana plugs) blue 1.8 m	WAPRZ1X8BUBB						1	1	1	1			
	Test lead 5 kV (banana plugs) blue 3 / 5 / 10 m	WAPRZ003BUBB5K WAPRZ005BUBB5K WAPRZ010BUBB5K						•	•	•	•			
	Test lead 11 kV (banana plugs, shielded) black 1.8 m	WAPRZ1X8BLBBE10K	•	•	1	1								
	Test lead 11 kV (banana plugs, shielded) black 3 / 5 / 10 / 20 m	WAPRZ003BLBBE10K WAPRZ005BLBBE10K WAPRZ010BLBBE10K WAPRZ020BLBBE10K	•	•	•	•								
	Test lead 11 kV (banana plugs) red 1.8 m	WAPRZ1X8REBB10K	•	•	1	1								
	Test lead 11 kV (banana plugs) red 3 / 5 / 10 / 20 m	WAPRZ003REBB10K WAPRZ005REBB10K WAPRZ010REBB10K WAPRZ020REBB10K	•	•	•	•								
	Test lead 11 kV (banana plugs) blue 1.8 m	WAPRZ1X8BUBB10K	•	•	1	1								
	Test lead 11 kV (banana plugs) blue 3 / 5 / 10 / 20 m	WAPRZ003BUBB10K WAPRZ005BUBB10K WAPRZ010BUBB10K WAPRZ020BUBB10K	•	•	•	•								
	Test lead 15 kV with crocodile clip, shielded, black 1.8 m	WAPRZ1X8BLKROE15KV	•	•	•	•	•							
	Test lead 15 kV with crocodile clip, shielded, black 3 m	WAPRZ003BLKROE15KV	1	1	1	•	•							
	Test lead 15 kV with crocodile clip, shielded, black 5 / 10 / 20 m	WAPRZ005BLKROE15KV WAPRZ010BLKROE15KV WAPRZ020BLKROE15KV	•	•	•	•	•							
	Test lead 15 kV with crocodile clip, red 1.8 m	WAPRZ1X8REKRO15KV	•	•	•	•	•							
	test lead 15 kV with crocodile clip, red 3 m	WAPRZ003REKRO15KV	1	1	1	•	•							
	test lead 15 kV with crocodile clip, red 5 / 10 / 20 m	WAPRZ005REKRO15KV WAPRZ010REKRO15KV WAPRZ020REKRO15KV	•	•	•	•	•							
	Test lead 15 kV with crocodile clip, blue 1.8 m	WAPRZ1X8BUKRO15KV	•	•	•	•	•							



Photo	Name	Index	MIC-15k1	MIC-10k1	MIC-5050	MIC-5010	MIC-5005	MIC-5001	MIC-2511 EPA	MIC-2511	MIC-2501	MIC-30	MIC-10	MIC-5
	Test lead 15 kV with crocodile clip, blue 3 m	WAPRZ003BUKRO15KV	1	1	1	•	•							
	Test lead 15 kV with crocodile clip, blue 5 / 10 / 20 m	WAPRZ005BUKRO15KV WAPRZ010BUKRO15KV WAPRZ020BUKRO15KV	•	•	•	•	•							
	PRS-1 resistance test probe	WASONPRS1	•	•	•	•	•	•	•	•	•	•	•	
	Probe for measuring resistance in zones with ESD protection (2 pcs.)	WASONPRS2							•	•				
	Probe for measuring resistance in zones with ESD protection (kit with a case)	WASONPRS2KIT							•	•				
	Set for measuring resistance in zones with ESD protection (kit with a case and PRS-1 probe)	WASONPRZ2							•	•				
	Kit for measuring resistance in zones with ESD protection with space for meter (kit with a case and PRS-1 probe)	WASONPRZ2MIC							1	•				
	Temperature probe ST-1	WASONT1		•	•				•	•				
	Pin probe, black 1 kV (banana socket)	WASONBLOGB1									•	1	1	
	Pin probe, red 1 kV (banana socket)	WASONREOGB1									•	1	1	
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1									•	•	•	
	Pin probe, black 5 kV (banana socket)	WASONBLOGB2						1	1	1	1			
	Pin probe, red 5 kV (banana socket)	WASONREOGB2						1	1	1	1			
	Pin probe, black 11 kV (banana socket)	WASONBLOGB11			1	1								
	Pin probe, red 11 kV (banana socket)	WASONREOGB11			1	1								
	Φ4 mm screw tip (set of 4 pcs.)	WAPOZN4MMK												1
	4 mm applied tip (set of 2 pcs.)	WAPOZO4MMK												1
	CS-1 cable simulator	WAADACS1	•	•	•	•	•	•	•	•	•	•	•	•
	CS-5kV calibration box	WAADACS5KV	•	•	•	•	•	•	•	•	•	•	•	•
	Li-Ion 10.8 V 3.5 Ah rechargeable battery	WAAKU29							1	1				
	Z7 power supply	WAZASZ7						1			1			

## MIC

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	MIC-15k1	MIC-10k1	MIC-5050	MIC-5010	MIC-5005	MIC-5001	MIC-2511 EPA	MIC-2511	MIC-2501	MIC-30	MIC-10	MIC-5
	Z32 power supply	WAZASZ32							1	1				
	230 V mains cable (IEC C7 plug)	WAPRZLAD230						1			1			
	Mains cable with IEC C13 plug	WAPRZ1X8BLIEC	1	1	1	1	1							
	Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM						•			•			
	Hanging strap	WAP0ZPAS6							1	1				
	M1 hanging straps	WAP0ZSZE4										1	1	
	W1 hanging straps	WAP0ZSZE5	1	•	•	1	1		•	•				
	M1 hanging hook straps	WAP0ZUCH1										1	1	
	Magnetic hanging strap	WAP0ZUCH6										•	•	
	L4 carrying case	WAFUTL4	1	1	1	1	1							
	L7 backpack	WAFUTL7	•	•	•	•	•							
	L14 carrying case	WAFUTL14	•	•	•	•	•							
	M6 carrying case	WAFUTM6							•	1		1	1	
	M8 carrying case	WAFUTM8						1			1			
	M15 carrying case	WAFUTM15							•	•				
	S2 carrying case	WAFUTS2												•
	L7 carrying case for PRS-2	WAWALL7							•	•				
	USB cable	WAPRZUSB	1	1	1	1	1	1			1			
	Type C USB cable	WAPRZUSBC							1	1				
	PC software: Sonel Reports Plus	WAPROREPORTSPUS	•	•	•	•	•	•	•	•	•	•	•	•
	PC software: Sonel Reader	WAPROREADER	•	•	•	•	•	•	•	•	•	•	•	•

## Fault loop impedance meters

MZC-340-PV  
MZC-330S  
MZC-320S  
MZC-310S

MZC-306

MZC-304F  
MZC-20E




## Comparison of fault loop impedance meters

					
	MZC-340-PV	MZC-330S	MZC-320S	MZC-310S	MZC-306
Rated voltage [V]	220/380 230/400 240/415 290/500 400/690 460/800	110/190 115/200 127/220 220/380 230/400 240/415 290/500 400/690	110/190 115/200 127/220 220/380 230/400 240/415 290/500	220/380 230/400	110/190 115/200 127/220 220/380 230/400 240/415 290/500 400/690
Operating voltage range [V]	200...900	100...750	100...550	187...440	100...750
Display range [Ω]	0...1999	0...1999	0...1999	0...199.9	0...1999
Maximum resolution [Ω]	0.001	0.001	0.001	0.001	0.01
Maximum resolution for measurement with 15 mA current [Ω]	—	—	—	—	0.01
Max. measurement current [A]	130/280	130/280	130/280	160/280	12.2...36.7
Measuring range according to EN 61557 [Ω]	0.0072...1999	0.0072...1999	0.0072...1999	0.0072...199.9	0.13...1999
Display of fault loop resistance and reactance	✓	✓	✓	✓	✓
Calculation of prospective fault current on the basis of rated voltage	✓	✓	✓	✓	✓
Calculation of prospective fault current on the basis of measured voltage	—	—	—	—	—
Memory (number of each type of measurement)	990	990	990	990	990
4-lead method	✓	✓	✓	✓	—
Measurement of prospective touch and shock voltage	✓	✓	✓	✓	—
Selection of test lead length	—	✓	✓	✓	✓
In-socket measurement by means of adapter - plug	—	—	—	—	Option
Triggering of measurements by adapter	—	—	—	—	Option
Triggering of measurements via Wi-Fi	✓	✓	✓	—	—
Alternating voltage measurement	✓	✓	✓	✓	✓
Dimensions [mm]	429 x 328 x 236 mm	390 x 308 x 172	390 x 308 x 172	295 x 222 x 95	288 x 223 x 75
Weight [kg]	9.0	6.5	6.5	2.2	2.2







MZC-304F	MZC-20E	MPI-540-PV MPI-540 MPI-536 MPI-535	MPI-530-IT MPI-530	MPI-525 MPI-520	MPI-507 MPI-506 MPI-502F	
220/380 230/400 240/415	220/380 230/400 240/415	110/190 115/200 127/220 220/380 230/400 240/415	110/190 115/200 127/220 220/380 230/400 240/415	110/190 115/200 127/220 220/380 230/400 240/415	220/380 230/400 240/415	Rated voltage [V]
180...460	180...440	95...440	95...440	95...440	180...460	Operating voltage range [V]
0...1999	0...200	0...1999.9	0...1999	0...1999	0...1999	Display range [Ω]
0.01	0.01	0.001	0.001	0.01	0.01	Maximum resolution [Ω]
0.01	0.01	0.01	0.01	0.01	0.01	Maximum resolution for measurement with 15 mA current [Ω]
7.6/13.3	15.3/26.7	23/44	23/44	23/44	7.6/13.3	Max. measurement current [A]
0.13...1999	0.24...200	0.50...1999	0.13...1999	0.13...1999	0.13...1999	Measuring range according to EN 61557 [Ω]
✓	✓	✓	✓	✓	✓	Display of fault loop resistance and reactance
✓	✓	✓	✓	✓	✓	Calculation of prospective fault current on the basis of rated voltage
✓	—	✓	✓	—	—	Calculation of prospective fault current on the basis of measured voltage
990	—	100 000	10 000	990	990	Memory (number of each type of measurement)
—	—	—	—	—	—	4-lead method
—	—	—	—	—	—	Measurement of prospective touch and shock voltage
✓	✓	✓	✓	✓	✓	Selection of test lead length
✓	—	✓	✓	✓	✓	In-socket measurement by means of adapter - plug
Option	—	✓	✓	✓	Option	Triggering of measurements by adapter
—	—	—	—	—	—	Triggering of measurements via Wi-Fi
✓	✓	✓	✓	✓	✓	Alternating voltage measurement
220 x 102 x 61	220 x 102 x 61	288 x 223 x 75	288 x 223 x 75	288 x 223 x 75	220 x 102 x 61	Dimensions [mm]
0.6	0.5	2.5	2.2	2.2	0.6	Weight [kg]

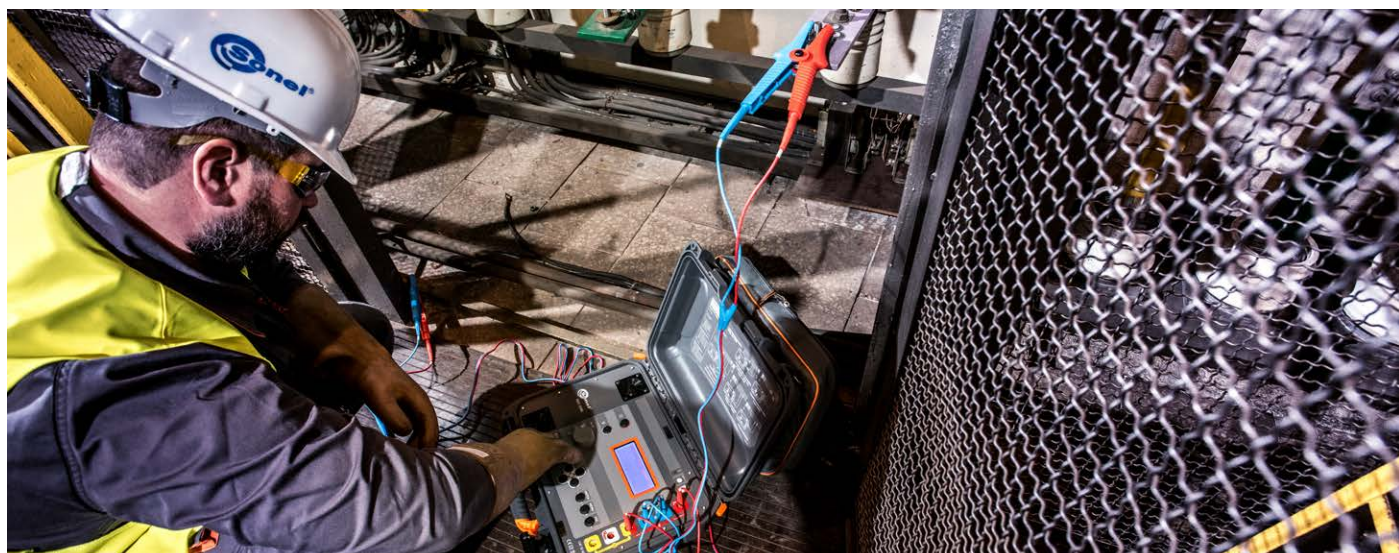



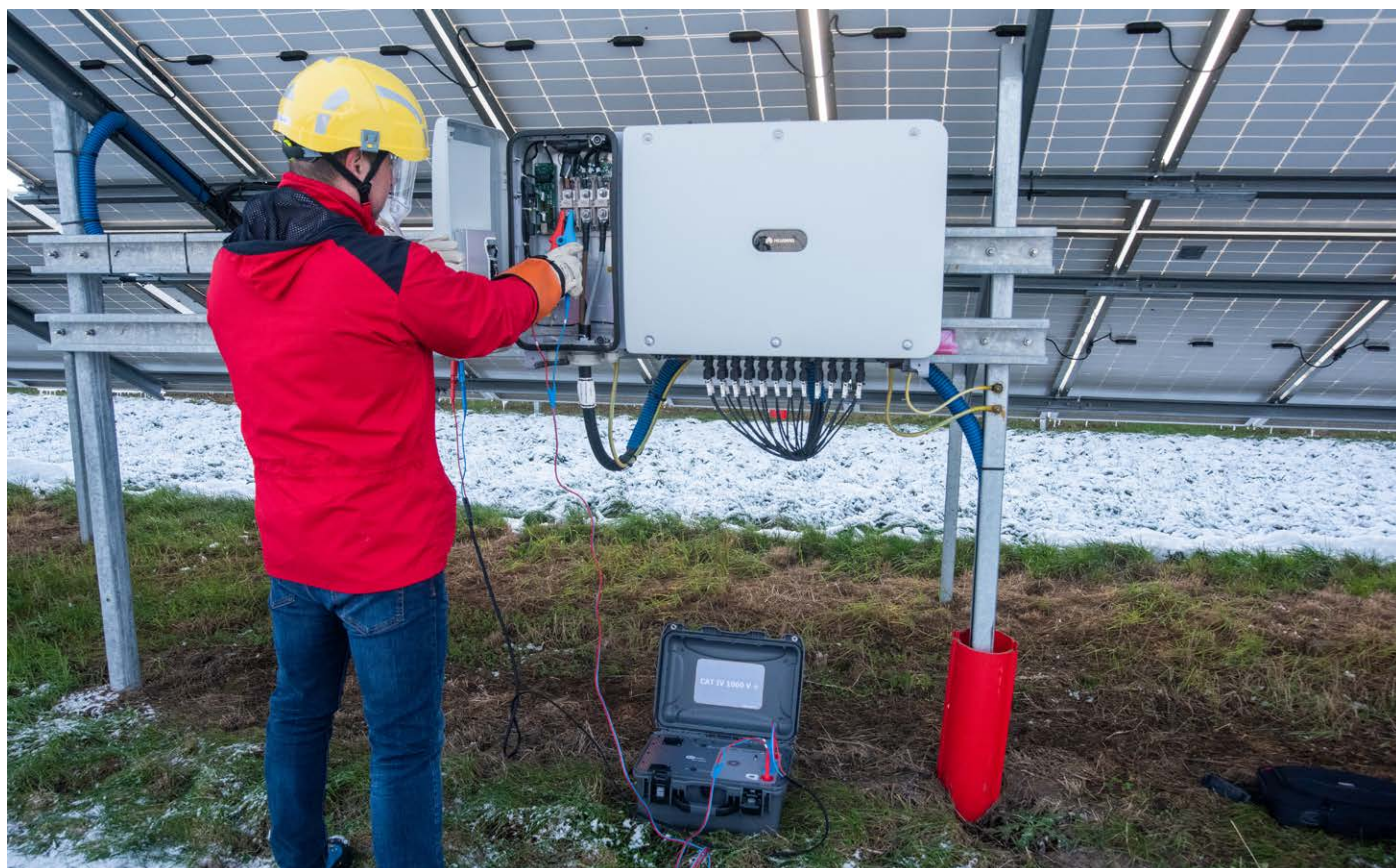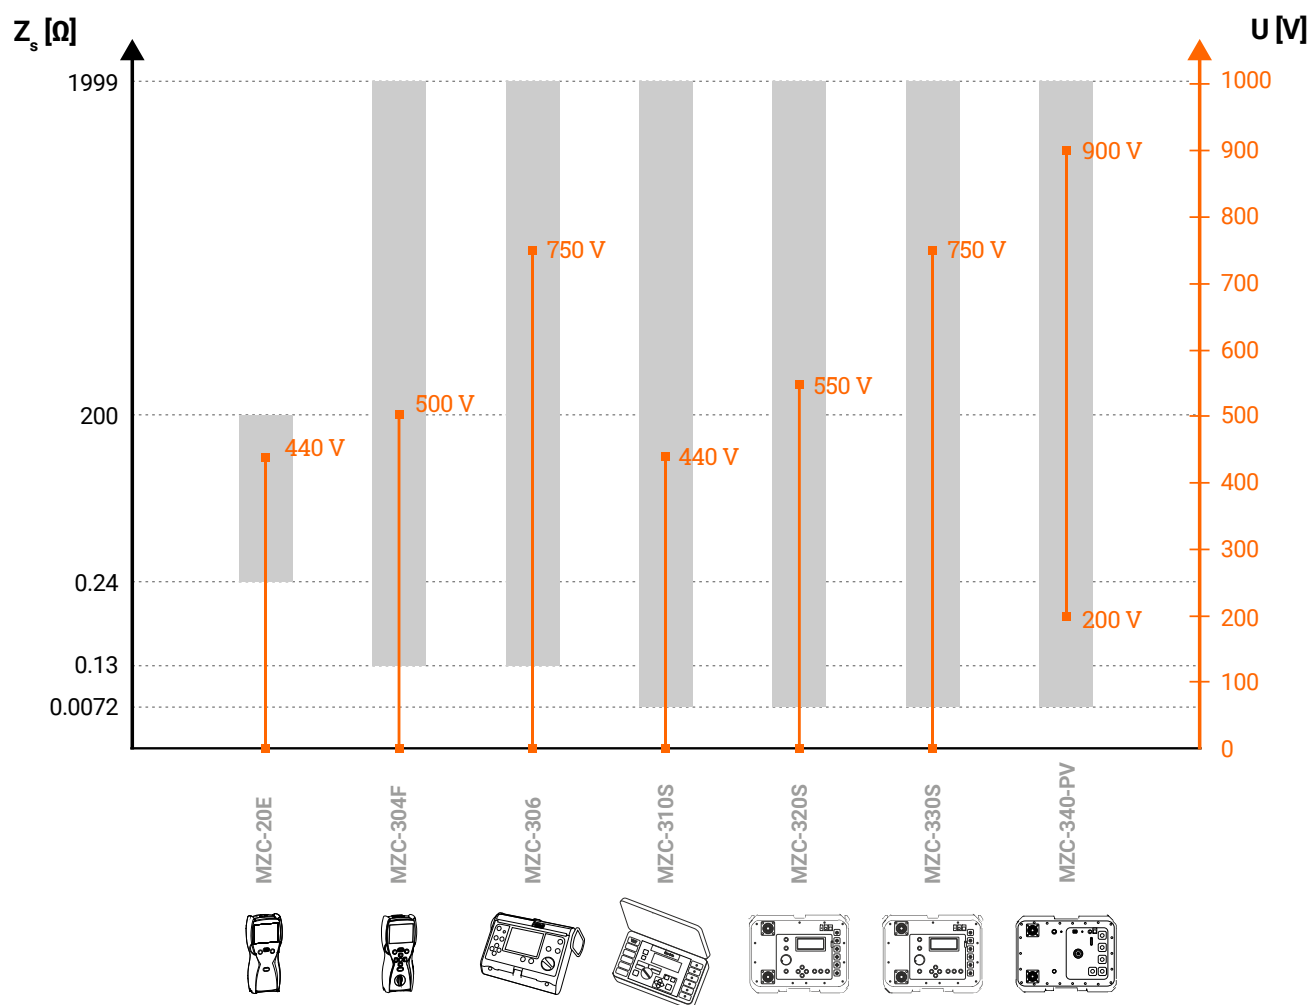



## SONEL MZC-340-PV

index: WMGBMZC340PV



**900 V**

maximum  
network  
voltage

**0.1 mΩ**

maximum  
resolution

**CAT IV**



**IP67**



**WiFi**

**1000 V**

### Fault loop impedance measurement:

- » measurement of very low short circuit loop impedances (with resolution 0.1 mΩ) with a current of 130 A at 230 V; maximum 305 A at 550 V AC and 250 A at 900 V AC,
- » measurements in installations with rated voltages: 220/380 V, 230/400 V, 240/415 V, 290/500 V, 400/690 V, 460/800 V (from 200 V up to 900 V) and frequencies 45...65 Hz,
- » ability to perform measurements in short circuit system: phase-phase, phase-PE, phase-N,
- » differentiation between the phase voltage and the inter-phase voltage while calculating the short circuit current,
- » 4p (four-pole) method, test leads do not require calibration (measurement with current up to 305 A),
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components.

### Additional functions of the meter:

- » remote control,
- » touch voltage and touch shock voltage measurement with resistor 1 kΩ,
- » AC voltage measurement in range 0...900 V,
- » frequency measurement 45.0...65.0 Hz,
- » memory of 990 measurement results, data transmission via USB and Wi-Fi,
- » power supply: rechargeable battery,
- » the device meets the requirements of EN 61557 standard.

### Electric security:

- » type of insulation ..... double, according to EN 61010-1 and IEC 61557
- » measurement category ..... IV 1000 V acc. to EN 61010-1
- » protection class acc. EN 60529 ..... IP67 (IP20 with front cover open)

### Other technical specifications:

- » power supply ..... built in Li-Ion 7.2 V / 9.8 Ah rechargeable battery
- » resistor limiting the current: for 4 pole method (4p) ..... 1.8 Ω for  $U \leq 550$  V  
..... 2.5 Ω for  $U > 550$  V
- » number of short circuit loop measurements ..... min. 5000 (2/min)
- » temperature coefficient .....  $\pm 0.1\%$  of measured value/ $^{\circ}\text{C}$
- » dimensions ..... 429 x 328 x 236 mm
- » weight ..... 9.0 kg

### Nominal operating conditions:

- » operating temperature range ..... -10...+40 $^{\circ}\text{C}$

### Standard accessories:

Doble-wire test lead 3 m (10 / 25 A) CAT IV 1000 V U1/I1	WAPRZ003DZBBU111CATIV
Doble-wire test lead 3 m (10 / 25 A) CAT IV 1000 V U2/I2	WAPRZ003DZBBU212CATIV
2x Kelvin clamp 1 kV 25 A CAT IV 1000 A	WAKROKELK07
2x high-current pin probe 1 kV CAT IV 1000 V (banana sockets)	WASONSPGB2
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Power supply adaptor Z19	WAZASZ19
M-6 carrying case	WAFUTM6
USB cable	WAPRZUSB
Factory calibration certificate	

### High-current measurement of fault loop parameters (4-lead $I_{\text{max}} = 305$ A)

High-current measurement of fault loop impedance  $Z_s$ :  
measuring range according to EN 61557-3: 7.2 mΩ...1999 mΩ

Display range	Resolution	Accuracy
0...199.9 mΩ	0.1 mΩ	$\pm(2\% \text{ m.v.} + 2 \text{ mΩ})$
200...1999 mΩ	1 mΩ	

### Short circuit current indication

Measuring range according to IEC 61557

for  $U_n = 230$  V **115.0 A...32.9 kA** for  $U_n = 400$  V **200 A...55.5 kA**  
for  $U_n = 500$  V **250 A...69.4 kA** for  $U_n = 690$  V **345 A...95.8 kA**  
for  $U_n = 800$  V **400 A...111.1 kA**

Display range	Resolution	Accuracy
110.0...199.9 A	0.1 A	Calculated on the basis of error for fault loop
200...1999 A	1 A	
2.00...19.99 kA	0.01 kA	
20.0...199.9 kA	0.1 kA	

### Touch voltage measurements $U_{\text{st}}$ and shock voltage $U_{\text{t}}$

Display range	Resolution	Accuracy
0...100 V	1 V	$\pm(10\% \text{ m.v.} + 2 \text{ digits})$



The MZC-310S, 320S, 330S and 340-PV meters are the only meters on the market that also enable touch voltage or shock voltage measurement, which can be employed during safety assessment of a tested system.

## SONEL MZC-330S / MZC-320S

index: WMGBMZC330S / WMGBMZC320S



MZC-330S  
**750 V**  
maximum  
network  
voltage

**0.1 mΩ**  
maximum  
resolution

CAT IV



IP67

600 V

### Fault loop impedance measurement:

- » measurement of very low short circuit loop impedances (with resolution 0,1 mΩ) with a current of 130 A at 230 V; maximum 300 A at 690 V (500 V in MZC-320S),
- » measurement with a current of 24 A at 230 V, maximum 37 A at 690 V (maximum 27 A at 500 V in MZC-320S) with resolution 0,01 Ω,
- » measurements in installations with rated voltages: 110/190 V, 115/200 V, 127/220 V, 220/380 V, 230/400 V, 240/415 V, 290/500 V and 400/690 V (MZC-330S only) and frequencies 45...65 Hz,
- » ability to perform measurements in short circuit system: phase-phase, phase-PE, phase-N,
- » differentiation between the phase voltage and the inter-phase voltage while calculating the short circuit current,
- » ability to change the length of test lead (measurement with 2p method),
- » 4p (four-pole) method, test leads do not require calibration (measurement with current up to 300 A),
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components.

### Additional functions of the meter:

- » remote control via Wi-Fi: triggering the measurement, saving the result to the meter's memory, downloading the results from the instrument's memory,
- » touch voltage and touch shock voltage measurement with resistor 1 kΩ),
- » AC voltage measurement in range 0...750 V (0...550 V in MZC-320S),
- » frequency measurement 45.0...65.0 Hz,
- » memory of 990 measurement results, ability to transfer the data to a PC via USB and Wi-Fi,
- » power supply: rechargeable battery,
- » the device meets the requirements of EN 61557 standard.

### Electric security:

- » type of insulation ..... double, according to EN 61010-1 and IEC 61557
- » measurement category ..... IV 600 V acc. to EN 61010-1
- » protection class acc. EN 60529 ..... IP67 (IP20 with front cover open)

### Other technical specifications:

- » power supply ..... built in Li-Ion 7.2 V / 8.8 Ah rechargeable battery
- » resistor limiting the current:
  - for 4 pole method (4p) ..... 1.8 Ω for  $U \leq 550$  V
  - ..... 2.5 Ω for  $U > 550$  V (MZC-330S)
  - for two pole method (2p) ..... 9.4 Ω for  $U \leq 253$  V
  - ..... 19 Ω for  $U > 253$  V
- » number of short circuit loop measurements ..... min. 4000 (2/min)
- » temperature coefficient .....  $\pm 0,1\%$  of measured value/ $^{\circ}\text{C}$
- » dimensions ..... 390 x 308 x 172 mm
- » weight ..... 6.5 kg

### Nominal operating conditions:

- » operating temperature range ..... -10...+40 $^{\circ}\text{C}$

### Standard accessories:

Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Pin probe, black 1 kV (banana socket)	WASONBLOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1
Doble-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU1I1
Doble-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU2I2
4x crocodile clip, black, 1 kV, 32 A	WAKROBL30K03
2x Kelvin clamp, 1 kV, 25 A	WAKROKELK06
2x high-current pin probe 1 kV (banana sockets)	WASONSPGB1
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Power supply adaptor Z19	WAZASZ19
L-14 carrying case	WAFUTL14
USB cable	WAPRZUSB

Factory calibration certificate

### High-current measurement of fault loop parameters (4-lead $I_{\text{max}} = 300$ A)

High-current measurement of fault loop impedance  $Z_s$ :

measuring range according to EN 61557-3: 7.2 mΩ...1999 mΩ

Display range	Resolution	Accuracy
0...199.9 mΩ	0.1 mΩ	$\pm(2\% \text{ m.v.} + 2 \text{ mΩ})$
200...1999 mΩ	1 mΩ	

### Short circuit current indication

Measuring range according to IEC 61557

for  $U_n = 230$  V 115.0 A...32.9 kA for  $U_n = 400$  V 200 A...55.5 kA

for  $U_n = 500$  V 250 A...69.4 kA for  $U_n = 690$  V 345 A...95.8 kA (MZC-330S)

Display range	Resolution	Accuracy
115.0...199.9 A	0.1 A	Calculated on the basis of error for fault loop
200...1999 A	1 A	
2.00...19.99 kA	0.01 kA	
20.0...199.9 kA	0.1 kA	
200 kA... *	1 kA	

\*max 690 kA for MZC-330S, max 500 kA for MZC-320S


### Touch voltage measurements $U_{\text{st}}$ and shock voltage $U_{\text{T}}$

Display range	Resolution	Accuracy
0...100 V	1 V	$\pm(10\% \text{ m.v.} + 2 \text{ digits})$

### Short circuit loop parameters measurement using standards current (2p, $I_{\text{max}} = 37$ A)

Measuring range according to IEC61557: 0,13 Ω...199,9 Ω for test leads length 1,2 m

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 Ω	0.1 Ω	$\pm(3\% \text{ m.v.} + 3 \text{ digits})$

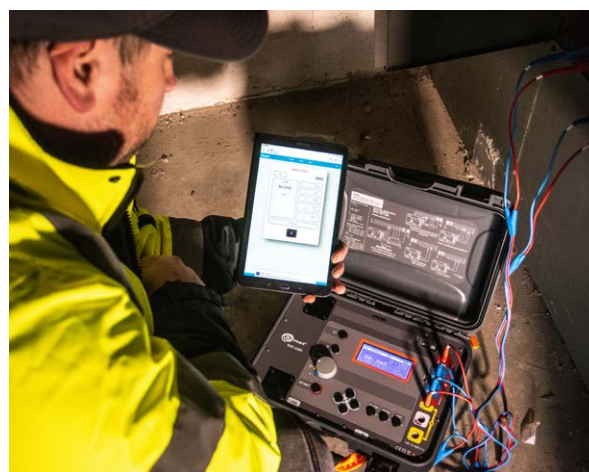

The MZC-310S, 320S, 330S and 340-PV meters are the only meters on the market that also enable touch voltage or shock voltage measurement, which can be employed during safety assessment of a tested system.



## SONEL MZC-310S

index: WMGBMZC310S



### Fault loop impedance measurement:

- » measurement of very low short circuit loop impedances (with resolution 0,1 mΩ) with a current of 150 A at 230 V; maximum 280 A at 440 V,
- » measurement with a current of 23 A at 230 V, maximum 42 A at 440 V with resolution 0,01 Ω,
- » measurements in installations with rated voltages: 220/380 V and 230/400 V and frequencies 45...65 Hz,
- » ability to perform measurements in short circuit system: phase-phase, phase-PE, phase-N,
- » differentiation between the phase voltage and the inter-phase voltage while calculating the short circuit current,
- » ability to change the length of test lead (measurement with 2p method),
- » 4p (four-pole) method, test leads do not require calibration (measurement with current up to 280 A),
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components.

### Additional functions of the meter:

- » touch voltage and touch shock voltage measurement with resistor 1 kΩ),
- » AC voltage measurement in range 0...440 V,
- » frequency measurement 45.0...65.0 Hz,
- » memory of 990 measurement results, ability to transfer the data to a PC via RS-232,
- » power supply: rechargeable battery (5x LR14).

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » power supply of the meter ..... LR14 alkaline batteries (size C, 5 pcs.)
- » current-limiting resistor ..... for 4-lead measurement: 1.5 Ω, for 2-lead measurement: 10 Ω
- » number of fault loop measurements (alkaline batteries) ..... at least 4000 (2/min.)
- » temperature coefficient .....  $\pm 0,1\%$  of measured value/ $^{\circ}\text{C}$

### Nominal operating conditions:

- » operating temperature range ..... 0...+40 $^{\circ}\text{C}$

### Standard accessories:

L1 carrying case	WAFUTL1
4x crocodile clip, black, 1 kV, 32 A	WAKROBL30K03
2x Kelvin clamp, 1 kV, 25 A	WAKROKELK06
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Double-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU1I1
Double-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU2I2
RS-232 serial transmission cable	WAPRZR232
Pin probe, black 1 kV (banana socket)	WASONBLOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1
2x high-current pin probe 1 kV (banana sockets)	WASONSPGB1
UNI-SONEL hanging straps	WAPZSZSE1
Factory calibration certificate	

### High-current measurement of fault loop parameters (4-lead, $I_{\max} = 280 \text{ A}$ )

High-current measurement of fault loop impedance  $Z_s$ :

measuring range according to EN 61557-3: 7.2 mΩ...1999 mΩ

Display range	Resolution	Accuracy
0...199.9 mΩ	0.1 mΩ	$\pm(2\% \text{ m.v.} + 2 \text{ mΩ})$
200...1999 mΩ	1 mΩ	

### Fault current readings

Measuring range according to EN 61557- 3:

for  $U_n = 230 \text{ V}$  115.0 A...32.0 kA

for  $U_n = 400 \text{ V}$  200 A...55.7 kA

Display range	Resolution	Accuracy
115.0...199.9 A	0.1 A	Calculated on the basis of error for fault loop
200...1999 A	1 A	
2.00...19.99 kA	0.01 kA	
20.0...199.9 kA	0.1 kA	
200kA... *	1 kA	

\*230 kA for  $U_{L-N}$  400 kA for  $U_{L-L}$

### Measurement of touch voltage $U_{ST}$ and shock voltage $U_T$

Display range	Resolution	Accuracy
0...100 V	1 V	$\pm(10\% \text{ m.v.} + 2 \text{ digits})$

### Measurement of fault loop impedance $Z_s$ with standard current (2-lead, $I_{\max} = 42 \text{ A}$ )

measuring range for 1.2 m test leads according to EN 61557: 0.13 Ω...199.9 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 Ω	0.1 Ω	$\pm(3\% \text{ m.v.} + 3 \text{ digits})$



The MZC-310S, 320S, 330S and 340-PV meters are the only meters on the market that also enable touch voltage or shock voltage measurement, which can be employed during safety assessment of a tested system.



## Fault loop impedance meter

# SONEL MZC-306

index: WMGBMZC306

**750 V**

maximum  
network  
voltage

**Z<sub>L-PE</sub>  
RCD**

measurements  
without tripping  
RCDs

**CAT IV**

**600 V**

**CAT III**

**1000 V**

**IP54**



### Standard accessories:

WS-05 adapter with UNI-SCHUKO angular plug	WAADWS05
NiMH battery 4.8 V 4.2 Ah	WAAKU07
L4 carrying case	WAFUTL4
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1
L2 hanging straps (set)	WAPZSZSEKPL
Z7 Power supply	WAZASZ7

Factory calibration certificate

### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$

Measuring range acc. to EN 61557-3 for 1.2 m test leads: **0.13...1999 Ω**

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(5% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	±(4% m.v. + 3 digits)
200...1999 Ω	1 Ω	

Nominal voltage: 100...440 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) or 100...750 V (for  $Z_{L-L}$ )

### Measurement of earth fault loop impedance $Z_{L-PE}$ in RCD mode

Measuring range according to EN 61557-3 for 1,2 m leads: **0.43...1999 Ω**

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(6% m.v. + 10 digits)
20.0...199.9 Ω	0.1 Ω	±(6% m.v. + 5 digits)
200...1999 Ω	1 Ω	

### Fault loop impedance measurement:

- » fault loop impedance measurement with 0.01 Ω resolution,
- » low-current impedance measurement in circuits protected by RCD ≥ 30mA with 0.01 Ω resolution (range of 100...440 V),
- » operates in networks with voltages 110/190 V, 115/200 V, 127/220 V, 220/380 V, 230/400 V, 240/415 V, 290/500 V and 400/690 V (operating range 100...750 V),
- » operating frequency 45...65 Hz,
- » calculation of  $I_k$  fault current,
- » automatic differentiation between phase and phase-to-phase voltage,
- » possibility of applying an adapter terminated by a power network plug or 1.2, 5, 10, 20 m test leads,
- » measurement with swapped L and N conductors,
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components.

### Additional functions of the meter:

- » contact electrode - quick testing of proper connection of PE conductor,
- » voltage measurement 0...750 V AC (0...250 V with resolution of 0,1 V),
- » memory of 990 measurement results, ability to transfer the data to a PC via USB,
- » power supply: batteries (4 x LR14) or rechargeable batteries.

### Instruments meet the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



Meter calculates the value of prospective fault current in compliance with standard HD 60364-6.

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » test leads ..... EN 61010-2-031

### Other technical specifications:

- » meter power supply ..... rechargeable battery pack or (optional) alkaline batteries
- » rechargeable battery or alkaline battery performance ..... at least 5000 measurements (2/min)
- » display ..... backlit LCD

### Nominal operating conditions:

- » operating temperature range ..... 0...+45°C
- » humidity ..... 20...80%




MZC-306 meter performs fault loop impedance measurements in industrial networks of any voltage up to 750 V.



## Fault loop impedance meter

# SONEL MZC-304F

index: WMGBMZC304F



### Fault loop impedance measurement:

- » fault loop impedance measurement with 0.01 Ω resolution,
- » low-current impedance measurement in circuits protected by RCD ≥ 30mA with 0.01 Ω resolution (range of 180...270 V),
- » operates in networks with voltages 220/380 V, 230 V/400 V, 240/415 V (operating range 180...460 V),
- » operating voltage range: 180...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) and 180...460 V (for  $Z_{L-L}$ ),
- » maximum measuring current: 7.6 A for 230 V (3x10 ms), 13.3 A for 400 V (3x10 ms),
- » operating frequency 45...65 Hz,
- » calculation of  $I_k$  fault current,
- » measurement with swapped L and N conductors,
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components,
- » low-voltage measurement of continuity of circuit and resistance.

### Additional functions of the meter:

- » contact electrode - quick testing of proper connection of PE conductor,
- » voltage measurement 0...500 V,
- » frequency measurement 45.0...65.0 Hz,
- » memory of 990 measurement results, ability to transfer the data to a PC via Bluetooth,
- » power supply: batteries (4 x LR14) or rechargeable batteries (4 x NiMH).

### Electrical safety:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » test leads ..... EN 61010-2-031
- » measurement category ..... CAT III 600 V (CAT IV 300 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP67

### Other technical specifications:

- » power supply of the meter .... pack of rechargeable batteries or alkaline batteries (size AA, 4 pcs.)
- » rechargeable battery life ..... at least 5000 measurements (2/min)

### Nominal operating conditions:

- » operating temperature range ..... 0...+50°C
- » humidity ..... 20...80%



The MZC-304F meter calculates the value of prospective fault current in compliance with standard HD 60364-6.

### Standard accessories:

WS-05 adapter with UNI-Schuko angular plug	WAADAWS05
M6 carrying case	WAFUTM6
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
Test lead 1,2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1,2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 1,2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
M1 hanging straps	WAPOZSZE4
M1 hanging hook straps	WAPOZUCH1
Factory calibration certificate	



The MZC-304F meter measures fault loop impedance with 0.01 Ω resolution, including in circuits protected by RCDs, without tripping them.

### Measurement of fault loop impedance $Z_{L-PE}$ , $Z_{L-N}$ , $Z_{L-L}$ , fault loop resistance and reactance

Measuring range for 1.2 m test leads according to EN 61557-3:  
0.13 Ω...1999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(5% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...1999 Ω	1 Ω	

### Measurement of earth fault loop impedance $Z_{L-PE}$ in RCD mode

Measuring range for 1.2 m leads according to EN 61557-3:  
0.51 Ω...1999 Ω

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(6% m.v. + 10 digits)
20.0...199.9 Ω	0.1 Ω	
200...1999 Ω	1 Ω	±(6% m.v. + 5 digits)

- » does not trip RCDs with  $I_{\Delta n} \geq 30$  mA



### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)



MZC-304F always measures total fault loop impedance as well as its components – resistance and reactance – regardless of the phase shift value.

## SONEL MZC-20E

index: WMGBMZC20E



CAT III

300 V

IP67

### Fault loop impedance measurement:

- » fault loop impedance measurement with 0.01 Ω resolution,
- » operates in networks with voltages 220/380 V, 230/400 V, 240/415 V (operating range 180...440 V),
- » operating frequency 45...65 Hz,
- » calculation of  $I_k$  fault current,
- » automatic differentiation between phase and phase-to-phase voltage,
- » possibility of applying test leads: 1.2 m, 5 m and longer,
- » measurement with swapped L and N conductors,
- » measurement of resistance ( $R_s$ ) and reactance ( $X_s$ ) components.

### Additional functions of the meter:

- » voltage measurement 0...440 V AC,
- » power supply: batteries (4 x LR6) or rechargeable batteries (4 x NiMH).

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and IEC 61557
- » measurement category ..... CAT III 300 V according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP67

### Other technical specifications:

- » power supply of the meter ..... LR6 alkaline batteries or Ni-MH rechargeable batteries (size AA, 4 pcs.)
- » dimensions ..... 220 x 102 x 61 mm
- » meter weight with battery pack ..... 509 g
- » storage temperature ..... -20...+70 °C
- » operating temperature range ..... -10...+50 °C
- » humidity ..... 20...80%
- » reference temperature ..... +23...± 2 °C
- » reference humidity ..... 40...60%
- » elevation above sea level ..... <2000 m
- » time until Auto-OFF ..... max. 900 seconds
- » number of Z measurements (for rechargeable batteries) ..... >5000 (2 measurements/minute)
- » display ..... segmented LCD
- » quality standard ..... development, design and production in compliance with ISO 9001
- » the instrument meets the requirements set forth in the standards ..... IEC 61557
- » the instrument is compliant with standards ..... EN 61326-1 and EN 61326-2-2

### Standard accessories:

M13 carrying case	WAFUTM13
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Test lead 1,2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1,2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, blue 1 kV (banana socket)	WASONBUOGB1
M1 hanging straps	WAPOZSZE4
M1 hanging hook straps	WAPOZUCH1
Factory calibration certificate	

### Measurement of fault loop impedance $Z_s$ within the range of 0.24...200 Ω

Fault current  $I_k$ : 0.115+1769 A ( $U_n=230$  V)

AC voltage measurement: 0÷440 V

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(2.5% m.v. + 5 digits)
20.0...99.9 Ω	0.1 Ω	±(2.5% m.v. + 3 digits)
100...200 Ω	1 Ω	±(3% m.v. + 3 digits)

- » Nominal operating voltage  $U_{n-LN}/U_{n-LL}$ : 220/380 V, 230/400 V, 240/415 V
- » Operating voltage range: 180...270 V (for  $Z_{L-PE}$  and  $Z_{L-N}$ ) and 180...440 V (for  $Z_{LL}$ )
- » Nominal network frequency  $f_n$ : 50 Hz, 60 Hz
- » Operating frequency range: 45...65 Hz
- » Maximum measurement current: 15.3 A for 230 V (10 ms) and 26.7 A for 400 V (10 ms)

### Readings of fault loop resistance $R_s$ and fault loop reactance $X_s$ :

Display range	Resolution	Accuracy
0.00...9.99 Ω	0.01 Ω	±(5% m.v. + 5 digits) of $Z_s$ value

- » Calculated and displayed for  $Z_s < 10$  Ω

### Readings of fault current $I_k$

Measuring ranges according to EN 61557 can be calculated on the basis of  $Z_s$  measurement ranges and nominal voltages

Display range	Resolution	Accuracy
1.15...9.99 A	0.01 A	Calculated on the basis of uncertainty for fault loop
10.0...99.9 A	0.1 A	
100...999 A	1 A	
1.00...9.99 kA	0.01 kA	
10.0...40.0 kA	0.1 kA	

### Voltage measurement

Display range	Resolution	Accuracy
0...440 V	1 V	±(2.5% m.v. + 3 digits)




















### Measurement of fault loop impedance $Z_s$

Test lead	$Z_s$ measuring range
1.2 m	0.24...200 Ω
5 m	0.26...200 Ω
10 m	0.28...200 Ω
20 m	0.35...200 Ω





Photo	Name	Index	MZC-340-PV	MZC-330S	MZC-320S	MZC-310S	MZC-306	MZC-304F	MZC-20E
	Control panel	WAPOZTAB08	•						
	AGT-16C three-phase socket adapter 16 A (PEN)	WAADAAGT16C				•	•	•	•
	AGT-16P three-phase socket adapter 16 A	WAADAAGT16P				•	•	•	•
	AGT-16T industrial socket adapter 16 A	WAADAAGT16T				•	•	•	•
	AGT-32C three-phase socket adapter 32 A (PEN)	WAADAAGT32C				•	•	•	•
	AGT-32P three-phase socket adapter 32 A	WAADAAGT32P				•	•	•	•
	AGT-32T industrial socket adapter 32 A	WAADAAGT32T				•	•	•	•
	AGT-63P three-phase socket adapter 63 A	WAADAAGT63P				•	•	•	•
	WS-01 adapter with START button with UNI-Schuko plug	WAADAWS01					•		
	WS-03 adapter with START button with UNI-Schuko plug	WAADAWS03						•	
	WS-04 adapter with UNI-Schuko plug	WAADAWS04						•	
	WS-05 adapter with UNI-Schuko angular plug	WAADAWS05					1	1	
	WS-07 adapter for measuring Z(L-N)	WAADAWS07						•	
	Kelvin clamp, 1 kV, 25 A	WAKROKELK06		2	2	2			
	Kelvin clamp, 1 kV, 25 A CAT IV 1000 A	WAKROKELK07	2						
	Crocodile clip, black, 1 kV, 32 A	WAKROBL30K03		4	4	4			
	Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02					1		1
	Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02					1	•	
	Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02					•	1	

Photo	Name	Index	MZC-340-PV	MZC-330S	MZC-320S	MZC-310S	MZC-306	MZC-304F	MZC-20E
	Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB		1	1	1			
	Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB					1	1	1
	Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB					1	1	1
	Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB		1	1	1	1	1	
	Test lead 5 m, red, 1 kV (banana plugs)	WAPRZ005REBB					•	•	•
	Test lead 5 m, yellow, 1 kV (banana plugs)	WAPRZ005YEBB		•	•	•			
	Test lead 10 m, red, 1 kV (banana plugs)	WAPRZ010REBB					•	•	•
	Test lead 10 m, yellow, 1 kV (banana plugs)	WAPRZ010YEBB		•	•	•			
	Test lead 20 m, red, 1 kV (banana plugs)	WAPRZ020REBB					•	•	•
	Test lead 20 m, yellow, 1 kV (banana plugs)	WAPRZ020YEBB		•	•	•			
	Test lead 5 kV (banana plugs, shielded) black 1.8 m	WAPRZ1X8BLBB	•						
	Doble-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU1I1		1	1	1			
	Doble-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU2I2		1	1	1			
	Doble-wire test lead 6 m (10 A / 25 A) U1/I1	WAPRZ006DZBBU1I1		•	•				
	Doble-wire test lead 6 m (10 A / 25 A) U2/I2	WAPRZ006DZBBU2I2		•	•				
	Doble-wire test lead 3 m (10 / 25 A) CAT IV 1000 V U1/I1	WAPRZ003DZBBU1I1	1						
	Doble-wire test lead 3 m (10 / 25 A) CAT IV 1000 V U2/I2	WAPRZ003DZBBU2I2	1						
	Foldable pin probe, 1 kV, 2 m (banana socket)	WASONSP2M					•	•	•
	High-current pin probe 1 kV (banana sockets)	WASONSPGB1		2	2	2			

## MZC

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	MZC-340-PV	MZC-330S	MZC-320S	MZC-310S	MZC-306	MZC-304F	MZC-20E
	High-current pin probe 1 kV CAT IV 1000 V (banana sockets)	WASONSPGB2	2						
	Pin probe, black 1 kV (banana socket)	WASONBLOGB1		1	1	1			
	Pin probe, red 1 kV (banana socket)	WASONREOGB1					1	1	1
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1					1	1	1
	Pin probe, yellow 1 kV (banana socket)	WASONYEGB1		1	1	1	1		•
	Pin probe, black 11 kV (banana socket)	WASONBLOGB11	•						
	Pin probe, red 11 kV (banana socket)	WASONREOGB11				•			
	NiMH battery 4.8 V 4.2 Ah	WAAKU07					1		
	Battery container	WAPOJ1					•		
	230 V mains cable (IEC C7 plug)	WAPRZLAD230	1				1		
	Z7 Power supply	WAZASZ7					1		
	Power supply adaptor Z19	WAZASZ19	1	1	1				
	Cable for battery charging from car cigarette lighter socket (12V)	WAPRZLAD12SAM					•		
	Reel for long test lead	WAPQZSZP1				•			
	UNI-SONEL hanging straps	WAPQZSZE1				1			
	M1 hanging straps	WAPQZSZE4				•	1	1	

Photo	Name	Index	MZC-340-PV	MZC-330S	MZC-320S	MZC-310S	MZC-306	MZC-304F	MZC-20E
	L2 hanging straps (set)	WAPQZSZEKPL					1		
	M1 hanging hook straps	WAPQZUCH1						1	1
	Magnetic hanging strap	WAPQZUCH6					•		
	Cover (universal)	WAPQZUCH12					•		
	L1 carrying case	WAFUTL1				1			
	L2 carrying case	WAFUTL2				•			
	L4 carrying case	WAFUTL4		•	•		1		
	L7 backpack	WAFUTL7		•	•				
	L14 carrying case	WAFUTL14		1	1				
	M6 carrying case	WAFUTM6	1					1	
	M13 carrying case	WAFUTM13							1
	USB cable	WAPRZUSB	1	1	1		1		
	RS-232 serial transmission cable	WAPRZRS232				1			
	USB/RS-232 converter	WAADAUSBR232				•			
	PC software: Sonel Reports Plus	WAPROREPORTSPUS		•	•	•	•	•	
	PC software: Sonel Reader	WAPROREADER		•	•	•	•	•	

## Earth resistance meters

MRU-200-GPS  
MRU-200  
MRU-120HD  
MRU-120

MRU-30

MRU-21  
MRU-12  
MRU-10



## Set of instruments for earth measurements

Earth resistance measurement according to 3-pole method	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Earth resistance measurement according to 4-lead method	✓	✓	✓	✓	—	✓	—	✓	✓	—
Measurement current in measurements of earthing resistance [mA]	200	200	200	20	20	20	20	20	20	20
Maximum resolution [Ω]	0.001	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Earth resistance measurement according to 3-pole method with additional clamp	✓	✓	✓	✓	—	—	—	✓	✓	—
Earth impedance measurement according to impulse method	✓	—	—	—	—	—	—	—	—	—
Earth resistance measurement according to two-clamp method	✓	✓	✓	✓	—	—	—	✓	✓	—
Leakage current measurement with hard clamp	✓	—	—	✓	—	—	—	✓	✓	MPI-520
Leakage current measurement with flexible coil	✓	—	—	—	—	—	—	✓	✓	✓
Measurement of resistance of earth connection and equipotential bonding according to standard EN 61557-4	✓	✓	✓	✓	✓	—	—	✓	✓	✓
Soil resistivity measurement	✓	✓	✓	✓	—	✓	—	✓	✓	—
Internal source of current	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Earth resistance measurement according to 2-lead method	—	—	—	✓	✓	✓	✓	—	—	—
Power supply	rechargeable battery / batteries	rechargeable battery	rechargeable battery / batteries	rechargeable battery	rechargeable battery / batteries	rechargeable batteries / batteries	rechargeable batteries / batteries	rechargeable battery	rechargeable battery / batteries	rechargeable battery / batteries
Charging from car lighter socket	✓	✓	✓	✓	—	—	—	✓	✓	OPTIONAL
Memory (records)	990	990	990	990	990	990	—	100 000	10 000	990
Measurement of disturbance voltages	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Resistance measurement of auxiliary electrodes	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dimensions [mm]	288 x 223 x 75	390 x 310 x 180	288 x 223 x 75	200 x 180 x 74	288 x 223 x 75	220 x 102 x 61	220 x 102 x 61	288 x 223 x 75	288 x 223 x 75	288 x 223 x 75
Weight [kg]	2	4	2	1.1	1.4	0.7	0.7	2.5	2.2	2.2

## Earth resistance measurements adapter

### SONEL ERP-1

index: WAADAERP1 / WAADAERP1V2 / WAADAERP1V3



**The adapter is compatible with meters:**

- » MRU-200-GPS
- » MRU-200
- » MRU-120HD
- » MRU-120

The SONEL ERP-1 adapter, in combination with meters that can generate measurement current of 200 mA, serves for measuring of resistance of multiple groundings without disconnecting control connection clamps. The flexible, big diameter coil allows to measure earth resistance of e.g. transmission towers - including lattice poles - without shutting down the power line.

Ergonomic design of the adapter, its convenient housing and simple operation make earth resistance measurements on transmission towers and pylons quick and problem-free. The protection degree of the adapter is IP67, which makes it suitable for operation in muddy and rain conditions.

## Standard accessories:

	WAADAERP1	WAADAERP1V2	WAADAERP1V3
FS-2 flexible coil (Ø 1260 mm)	WACEGFS20KR	✓	
FSX-3 flexible coil (Ø 630 mm)	WACEGFSX30KR		✓
M6 carrying case	WAFUTM6	✓	✓
3x AA (LR6) 1.5 V battery		✓	✓
Declaration of verification		✓	✓

## Optional accessories:









XL8 hard carrying case	WAWALXL8
------------------------	----------

## Electrical specifications:

- » measuring range ..... up to 5 A
- » operating frequency ..... 125 Hz (in 50 Hz networks)  
..... 150 Hz (in 60 Hz networks)
- » power supply ..... 3 x LR6 1.5 V battery or 3 x Ni-MH LR6 1.2 V rech. battery
- » measurement category ..... CAT IV 300 V according to EN 61010-1

## Other specifications:


- » protection rating ..... IP67
- » storage temperature ..... -20...+80°C
- » relative humidity of storage ..... 20...90%
- » operating temperature range ..... -10...+50°C
- » operating humidity ..... 20...85%
- » exterior dimensions ..... 146 x 88 x 33 mm
- » weight with batteries / without batteries ..... 340 g / 270 g

Application	Distinguishing feature								
<b>Hard-to-reach measuring points</b> • cataloguing the coordinates of measurement locations	Coordinates of the measurement points added to the measurement results	✓							
<b>Military facilities</b> • comprehensive measurements	Operation in 400 Hz networks	✓	✓						
<b>Airport areas</b> • comprehensive measurements	Operation in 400 Hz networks	✓	✓						
<b>Lightning protection</b> • earthing impedance measurements	Impulse method	✓	✓						
<b>Gas stations</b> • earthing impedance measurements • other earthing measurements	Impulse method	✓	✓						
<b>Railway electric traction</b> • comprehensive measurements for all types of earthing	Operation in 16 2/3 Hz networks	✓	✓						
<b>Power poles</b> • multiple earthing points • pole base measurements	• Measurement current: 200 mA • Using ERP-1	✓	✓	✓	✓				
<b>Power stations</b> • high disruptions • multiple lattice earthing	Measurement current: 200 mA	✓	✓	✓	✓				
<b>Urban areas</b> • system consisting of horizontal and vertical earth electrodes • impossible to insert auxiliary electrodes	2-clamp method	✓	✓	✓	✓	✓			
<b>Soil tests</b> • earthing design	Soil resistivity	✓	✓	✓	✓	✓		✓	
<b>Commercial buildings</b> • ring, foundation, lattice earthing	3-pole method	✓	✓	✓	✓	✓	✓	✓	✓
<b>Residential buildings</b> • ring, foundation earth electrodes • vertical earth electrode systems	3-pole method	✓	✓	✓	✓	✓	✓	✓	✓
<b>Difficult measuring conditions</b> • dust in the air • rain, snow	Casing resistant to weather conditions and mechanical damage			✓					
									
		MRU-200-GPS	MRU-200	MRU-120HD	MRU-120	MRU-30	MRU-21	MRU-12	MRU-10
		Measurement current 200 mA							



## SONEL MRU-200 / MRU-200-GPS

index: WMGBMRU200 (with L2 case) / WMGBMRU200GPS (with L2 case)  
WMGBMRU200XL3 (with XL3 case) / WMGBMRU200GPSXL3 (with XL3 case)



### Earthing resistance measurements:

- » impulse method (without the need to disconnect measured earth electrodes) - three types of measurement impulse (4/10  $\mu$ s, 8/20  $\mu$ s, 10/350  $\mu$ s),
- » 3-pole method,
- » 4-lead method,
- » 3-pole method with additional clamp,
- » 3-pole method with ERP-1 adapter,
- » two-clamp method.

### Soil resistivity measurements (Wenner method):

- » distances between electrodes can be input in meters (m) or feet (ft),
- » displaying the soil resistivity value in  $\Omega$ m or  $\Omega$ ft.

### Measurement of resistance of earth connection and equipotential bonding:

- » with auto-zeroing function - with current  $\geq 200$  mA,
- » according to EN 61557-4.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_{Hr}$ ,
- » measurement of voltage and frequency of interference signal,
- » measurement in the presence of disturbance voltages in networks with frequency 16  $\frac{2}{3}$  Hz, 50 Hz and 60 Hz as well as 400 Hz (with automatic or manual selection of relevant measurement signal frequency),
- » selection of maximum measurement voltage (25 V and 50 V),
- » calibration of applied clamp,
- » full interoperability with ERP-1 adapter,
- » memory storing 990 measurements (10 banks with 99 cells each),
- » MRU-200-GPS | built-in GPS receiver,
- » real-time clock (RTC),
- » data transmission to computer (USB, Bluetooth).
- » reading of battery charge state, built-in quick charger.



MRU-200-GPS is the only earthing resistance and impedance meter with the function of determining the geographical coordinates of the location of measurement.



## SONEL MRU MOBILE

Mobile version of the program supports ground resistance and ground resistivity meters MRU-200 and MRU-200-GPS. It can be downloaded from **Google Play**.

### Standard accessories:

NiMH battery 4.8 V 4.2 Ah	WAAKU07
L2 carrying case (only WMGBMRU200, WMGBMRU200GPS)	WAFUTL2
XL3 carrying case (only WMGBMRU200XL3, WMGBMRU200GPSXL3)	WAWALXL3
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 2.2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ
Test lead 25 m, blue (banana plugs, on a reel)	WAPRZ025BUBBSZ
Test lead 50 m, yellow (banana plugs, on a reel, shielded)	WAPRZ050YEBBSZE
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
4x earth contact test probe (rod), 30 cm	WASONG30
L2 hanging straps (set)	WAPRZSZKPL
Cramp (banana socket)	WAZACIMA1
Z7 Power supply	WAZASZ7

Factory calibration certificate

### Earthing resistance measurement - 3-pole and 4-lead method

measuring range according to EN 61557-5: 0.100  $\Omega$ ...19.99 k $\Omega$

Display range	Resolution	Accuracy
0.000...3.999 $\Omega$	0.001 $\Omega$	$\pm(2\% \text{ m.v.} + 4 \text{ digits})$
4.00...39.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$
40.0...399.9 $\Omega$	0.1 $\Omega$	
400...3999 $\Omega$	1 $\Omega$	$\pm(5\% \text{ m.v.} + 2 \text{ digits})$
4.00 k $\Omega$ ...19.99 k $\Omega$	0.01 k $\Omega$	

### Resistance measurement of multiple earthing systems - 3-pole method with additional clamp

Display range	Resolution	Accuracy
0.000...3.999 $\Omega$	0.001 $\Omega$	$\pm(8\% \text{ m.v.} + 4 \text{ digits})$
4.00...39.99 $\Omega$	0.01 $\Omega$	$\pm(8\% \text{ m.v.} + 3 \text{ digits})$
40.0...399.9 $\Omega$	0.1 $\Omega$	
400...1999 $\Omega$	1 $\Omega$	

### Measurement of multiple earthing systems - two-clamp method

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(10\% \text{ m.v.} + 3 \text{ digits})$
20.0...149.9 $\Omega$	0.1 $\Omega$	$\pm(20\% \text{ m.v.} + 3 \text{ digits})$

### Measurement of earthing impedance - impulse method

Display range	Resolution	Accuracy
0.0...99.9 $\Omega$	0.1 $\Omega$	$\pm(2.5\% \text{ m.v.} + 3 \text{ digits})$
100...300 $\Omega$	1 $\Omega$	

### The instrument meets the requirements set forth in standards:

- » EN 62305-1 (lightning protection)
- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ... CAT IV 300 V (CAT III 600 V) acc. to EN 61010-1
- » number of measurements provided by set of batteries ..... >1500

### Nominal operating conditions:

- » operating temperature range ..... -10...+50°C
- » storage temperature ..... -20...+80°C
- » humidity ..... 20...90%



## SONEL MRU-120HD

index: WMGBMRU120HD



### Earthing resistance measurements:

- » 3-pole method,
- » 4-lead method,
- » 3-pole method with additional clamp,
- » two-clamp method.

### Soil resistivity measurements (Wenner method):


- » distances between electrodes can be input in meters (m) or feet (ft),
- » displaying the soil resistivity value in  $\Omega\text{m}$  or  $\Omega\text{ft}$ .

### Measurement of resistance of earth connection and equipotential bonding:

- » with auto-zeroing function - with current  $\geq 200\text{ mA}$
- » in compliance with EN 61557-4.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_H$ ,
- » measurement of voltage and frequency of interference signal,
- » measurement in the presence of disturbance voltages in networks with frequencies of 50 Hz and 60 Hz,
- » selection of maximum measurement voltage (25 V or 50 V),
- » interoperability with ERP-1 adapter,
- » memory storing 990 measurements (10 banks with 99 cells each),
- » real-time clock (RTC),
- » data transmission to computer (USB),
- » reading of battery charge status, built-in quick charger.

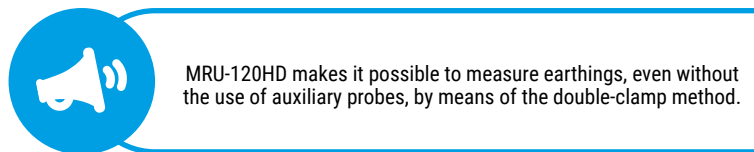

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 300 V (CAT III 600 V) acc. to EN 61010-1
- » number of measurements provided by set of batteries ..... >1100

### Nominal operating conditions:

- » operating temperature range ..... -10...+50°C
- » storage temperature ..... -20...+80°C
- » humidity ..... 20...85%

### Standard accessories:

L4 carrying case	WAFUTL4
Test lead 4 m black 1 kV (banana plugs)	WAPRZ4X0BLBB
Test lead 4 m blue 1 kV (banana plugs)	WAPRZ4X0BUBB
Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ
Test lead 25 m, blue (banana plugs, on a reel)	WAPRZ025BUBBSZ
Test lead 50 m, yellow (banana plugs, on a reel)	WAPRZ050YEBBSZ
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
4x earth contact test probe (rod), 30 cm	WASONG30
2x clamp (banana socket)	WAZACIMA1
W1 hanging straps	WAP0ZSZE5
Z7 Power supply	WAZASZ7
Factory calibration certificate	

### Earthing resistance measurement - 3-pole and 4-lead method

measuring range according to EN 61557-5: 0.30  $\Omega$ ...19.9 k $\Omega$


Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	
2.0...9.99 k $\Omega$	0.01 k $\Omega$	$\pm(5\% \text{ m.v.} + 2 \text{ digits})$
10.0...19.9 k $\Omega$	0.1 k $\Omega$	

### Resistance measurement of multiple earthing systems - 3-pole method with additional clamp

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(8\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

### Measurement of multiple earthing systems - two-clamp method

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(10\% \text{ m.v.} + 3 \text{ digits})$
20.0...149.9 $\Omega$	0.1 $\Omega$	$\pm(20\% \text{ m.v.} + 3 \text{ digits})$

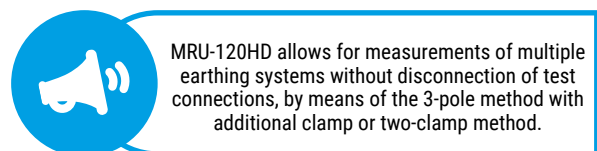

## SONEL MRU-120

index: WMGBMRU120 (with L2 case) / WMGBMRU120XL3 (with XL3 case)



**CAT III**  
600 V

**CAT IV**  
300 V

**IP54**

**200 mA**  
measurement current



### Earthing resistance measurements:

- » 3-pole method,
- » 4-lead method,
- » 3-pole method with additional clamp,
- » two-clamp method.

### Soil resistivity measurements (Wenner method):

- » distances between electrodes can be input in meters (m) or feet (ft),
- » displaying the soil resistivity value in  $\Omega\text{m}$ .

### Measurement of resistance of earth connection and equipotential bonding:

- » with auto-zeroing function - with current  $\geq 200$  mA
- » in compliance with EN 61557-4.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_{sp}$ ,
- » measurement of voltage and frequency of interference signal,
- » measurement in the presence of disturbance voltages in networks with frequencies of 50 Hz and 60 Hz,
- » selection of maximum measurement voltage (25 V or 50 V),
- » interoperability with ERP-1 adapter,
- » memory storing 990 measurements (10 banks with 99 cells each),
- » real-time clock (RTC),
- » data transmission to computer (USB),
- » reading of battery charge status, built-in quick charger.



MRU-120 makes it possible to measure earthings, even without the use of auxiliary probes, by means of the double-clamp method.

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 300 V (CAT III 600 V) acc. to EN 61010-1
- » number of measurements provided by set of batteries ..... >1100

### Nominal operating conditions:

- » operating temperature range ..... -10...+50°C
- » storage temperature ..... -20...+80°C
- » humidity ..... 20...85%

### Standard accessories:

NiMH battery 4.8 V 3.2 Ah	WAAKU08
L2 carrying case (only WMGBMRU120)	WAFUTL2
XL3 carrying case (only WMGBMRU120XL3)	WAWALXL3
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 2.2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ
Test lead 25 m, blue (banana plugs, on a reel)	WAPRZ025BUBBSZ
Test lead 50 m, yellow (banana plugs, on a reel)	WAPRZ050YEBBSZ
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
4x earth contact test probe (rod), 30 cm	WASONG30
Pin probe, red 1 kV (banana socket)	WASONREOGB1
L2 hanging straps (set)	WAPRZSZEKPL
Cramp (banana socket)	WAZACIMA1
Z7 Power supply	WAZASZ7
Factory calibration certificate	

### Earthing resistance measurement - 3-pole and 4-lead method

measuring range according to EN 61557-5: 0.30  $\Omega$ ...19.9 k $\Omega$

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 2 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	
2.0...9.99 k $\Omega$	0.01 k $\Omega$	$\pm(5\% \text{ m.v.} + 2 \text{ digits})$
10.0...19.9 k $\Omega$	0.1 k $\Omega$	

### Resistance measurement of multiple earthing systems - 3-pole method with additional clamp

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(8\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	

### Measurement of multiple earthing systems - two-clamp method

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(10\% \text{ m.v.} + 3 \text{ digits})$
20.0...149.9 $\Omega$	0.1 $\Omega$	$\pm(20\% \text{ m.v.} + 3 \text{ digits})$



MRU-120 allows for measurements of multiple earthing systems without disconnection of test connections, by means of the 3-pole method with additional clamp or two-clamp method.





## SONEL MRU-30

index: WMGBMRU30



CAT III

300 V

IP65



soil resistivity  
without manual  
conversion

### Earthing resistance measurements:

- » 3-pole method,
- » 4-lead method,
- » 3-pole method with additional clamp,
- » two-clamp method.

### Soil resistivity measurements (Wenner method):

- » distances between electrodes can be input in meters (m) or feet (ft),
- » displaying the soil resistivity value in  $\Omega\text{m}$  or  $\Omega\text{ft}$ .

### Measurement of resistance of earth connection and equipotential bonding:

- » with auto-zeroing function - with current  $\geq 200\text{ mA}$
- » in compliance with EN 61557-4.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_H$ ,
- » measurement of interference voltage,
- » measurement in the presence of disturbance voltages in networks with frequencies of 50 Hz and 60 Hz,
- » selection of maximum measurement voltage (25 V or 50 V),
- » memory storing 990 measurements (10 banks with 99 cells each),
- » data transmission to computer (USB),
- » reading of battery charge status.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT III 300V according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65
- » display ..... segment LCD, backlit
- » dimensions ..... 200 x 150 x 73 mm

### Nominal operating conditions:

- » operating temperature range ..... -10...+50°C
- » storage temperature ..... -20...+60°C
- » humidity ..... 20...90%



### Standard accessories:

L10 carrying case	WAFUTL10
M9 carrying case	WAFUTM9
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 2.2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ
Test lead 50 m, yellow (banana plugs, on a reel)	WAPRZ050YEBBSZ
USB cable	WAPRZUSB
230 V mains cable (IEC C7 plug)	WAPRZLAD230
2x earth contact test probe (rod), 30 cm	WASONG30
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Cramp	WAZACIMA1
Z7 Power supply	WAZASZ7
Factory calibration certificate	

### Earthing resistance measurement - 3-pole and 4-lead method

measuring range according to EN 61557-5:2007: 0.53  $\Omega$ ...9999  $\Omega$  for 50 V

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(3\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	$\pm 5\% \text{ m.v.}$
2000...9999 $\Omega$	1 $\Omega$	$\pm 8\% \text{ m.v.}$

### Resistance measurement of multiple earthing systems - 3-pole method with additional clamp

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(3\% \text{ m.v.} + 3 \text{ digits})$
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	$\pm 5\% \text{ m.v.}$
2000...9999 $\Omega$	1 $\Omega$	$\pm 8\% \text{ m.v.}$

### Measurement of multiple earthing systems - two-clamp method

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	$\pm(10\% \text{ m.v.} + 8 \text{ digits})$
20.0...99.9 $\Omega$	0.1 $\Omega$	$\pm(20\% \text{ m.v.} + 3 \text{ digits})$





## SONEL MRU-21

index: WMGBMRU21



### Earthing resistance measurement:

- » 3-pole method,
- » 2-pole method.

### Resistance measurement - 2-pole method:

- » auto-zeroing of test leads

### Measurement of resistance of earth connection and equipotential bonding:

- » meeting the requirements of EN 61557-4, with auto-zeroing function - with  $\geq 200$  mA current.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_H$ ,
- » measurement of interference voltage,
- » measurement in the presence of disturbance voltages in the network,
- » selection of maximum measurement voltage (25 V or 50 V),
- » memory storing up to 990 results, data transmission to computer via USB cable,
- » reading of battery or rechargeable battery charge status,
- » power supply from batteries or rechargeable batteries,
- » automatic power down.

### The instrument meets the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » EN 61557 (requirements for measurement instruments)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)
- » PN-E 04700 (performance of measurements - commissioning tests)

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 300V according to EN 61010-1
- » display ..... segment LCD, backlit
- » number of measurements provided by set of alkaline batteries ..... >1000 (5  $\Omega$ , 2/min)
- » dimensions ..... 260 x 190 x 60 mm
- » weight including batteries ..... 1.4 kg
- » this product meets EMC requirements in compliance with standards ..... EN 61326-1 and EN 61326-2-2
- » power supply of the meter ..... 4 x 1.5 V batteries or type C rechargeable batteries

### Nominal operating conditions:

- » operating temperature range ..... -10...+55°C
- » storage temperature ..... -20...+70°C
- » humidity ..... 20...90%

### Standard accessories:

L4 carrying case	WAFUTL4
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Battery container	WAP0J1
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB
Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ
Test lead 2.2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 30 m, red, (banana plugs, on a reel)	WAPRZ030REBBSZ
USB cable	WAPRZUSB
2x earth contact test probe (rod), 30 cm	WASONG30
L2 hanging straps (set)	WAP0ZSZEKPL
Factory calibration certificate	

### Earthing resistance measurement - 3-pole method

measuring range according to EN 61557-5:

**0.50  $\Omega$ ...1.99 k $\Omega$  for 50 V; 0.68  $\Omega$ ...1.99 k $\Omega$  for 25 V**


Display range	Resolution	Accuracy
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
10.0...99.9 $\Omega$	0.1 $\Omega$	
100...999 $\Omega$	1 $\Omega$	
1.00...1.99 k $\Omega$	0.01 k $\Omega$	

- » measurement current: >20 mA upon closing of circuit
- » frequency of measurement current: 125 Hz

### Measurement of resistance of earth connection and equipotential bonding:

measuring range according to EN 61557-4: **0.13  $\Omega$ ...199  $\Omega$**

Display range	Resolution	Accuracy
0.00...9.99 $\Omega$	0.01 $\Omega$	$\pm(2\% \text{ m.v.} + 3 \text{ digits})$
10.0...99.9 $\Omega$	0.1 $\Omega$	
100...199 $\Omega$	1 $\Omega$	

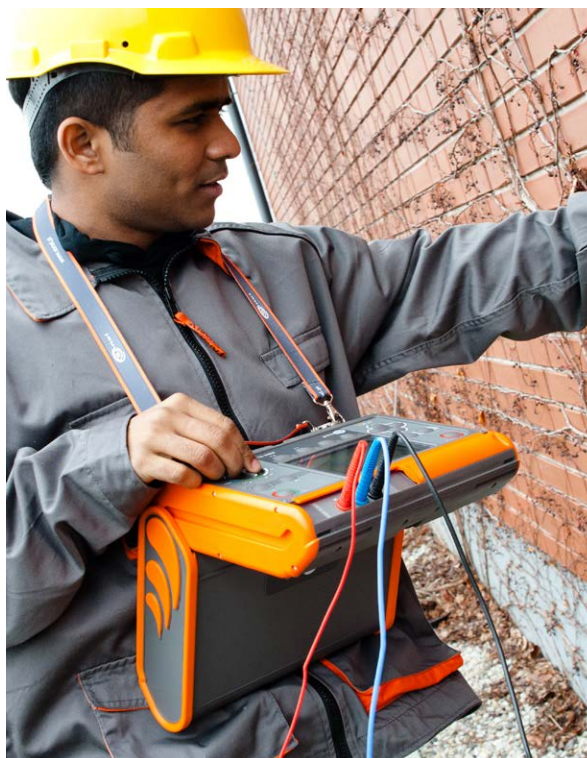

## SONEL MRU-12

index: WMGBMRU12



### Earthing resistance measurement:

- » 3-pole method,
- » 4-lead method,
- » 2-pole method.

### Soil resistivity measurements (Wenner and Schlumberger method):

- » distances between electrodes can be input in meters (m) or feet (ft),
- » displaying the soil resistivity value in  $\Omega\text{m}$  or  $\Omega\text{ft}$ .

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_{Hr}$ ,
- » measurement of interference voltage,
- » selection of maximum measurement voltage (25 V or 50 V),
- » memory storing up to 990 results,
- » data transmission to computer (Bluetooth).
- » reading of battery or rechargeable battery charge status,
- » automatic power down.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 150 V (III 300 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP65
- » power supply of the meter ..... alkaline batteries or NiMH AA rechargeable batteries (4 pcs.)
- » display ..... segment LCD, backlit
- » the meter meets the EMC requirements acc. to standards ..... EN 61326-1 and EN 61326-2-2
- » dimensions ..... 221 x 102 x 62 mm
- » weight with batteries ..... 710 g

### Nominal operating conditions:

- » operating temperature ..... -10...+50°C
- » storage temperature ..... -20...+60°C
- » reference temperature ..... +23±2°C
- » humidity ..... 20...90%

### Standard accessories:

M6 carrying case	WAFUTM6
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Test lead 15 m, blue (banana plugs, on H-frame reel)	WAPRZ015BUBBN
Test lead 15 m, red (banana plugs, on H-frame reel)	WAPRZ015REBBN
Test lead 30 m, yellow (banana plugs, on H-frame reel)	WAPRZ030YEBBN
Test lead 2,2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
Test lead 2,2 m, blue, 1 kV (banana plugs)	WAPRZ2X2BUBB
4x earth contact test probe (rod), 25 cm	WASONG25
M1 hanging straps	WAPOZSZE4
M1 hanging hook straps	WAPOZUCH1
4x AA battery, LR6	
Factory calibration certificate	

### Earthing resistance measurement - 3-pole and 4-lead method

measurement range to IEC 61557-5:2007: 0.53  $\Omega$ ...9999  $\Omega$  for 50 V

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	±(3% m.v. + 3 digits)
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	±5% m.v.
2000...9999 $\Omega$	1 $\Omega$	±8% m.v.

- » Measurement current: under short circuit >20 mA, frequency 125 Hz or 150 Hz, voltage selectable 25 V or 50 V.
- » Maximum interference voltage, at which  $R_E$  measurement is performed, equals 24 V.

### Earthing resistance measurement - 2-pole method

Display range	Resolution	Accuracy
0.00...19.99 $\Omega$	0.01 $\Omega$	±(3% m.v. + 3 digits)
20.0...199.9 $\Omega$	0.1 $\Omega$	
200...1999 $\Omega$	1 $\Omega$	±5% m.v.
2000...9999 $\Omega$	1 $\Omega$	±8% m.v.

- » Measurement current: under short circuit >20 mA, frequency 125 Hz or 150 Hz, voltage selectable 25 V or 50 V.
- » Maximum interference voltage, at which  $R_E$  measurement is performed, equals 24 V.



## Earthing resistance meter

# SONEL MRU-10

index: WMGBMRU10

**CAT IV**  
150 V

**CAT III**  
300 V

**IP67**



### Earthing resistance measurement:

- » 3-pole method,
- » 2-pole method.

### Additional functions of the meter:

- » measurement of auxiliary electrode resistances  $R_s$  and  $R_H$ ,
- » measurement of interference voltage,
- » selection of maximum measurement voltage (25 V or 50 V),
- » reading of battery or rechargeable battery charge status,
- » automatic power down.

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and EN 61557
- » measurement category ..... CAT IV 150 V (III 300 V) according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP67
- » power supply of the meter ..... alkaline batteries or NiMH AA rechargeable batteries (4 pcs.)
- » display ..... segment LCD, backlit
- » the meter meets the EMC requirements acc. to standards ..... EN 61326-1 and EN 61326-2-2
- » dimensions ..... 221 x 102 x 62 mm
- » weight with batteries ..... approx. 660 g

### Nominal operating conditions:

- » operating temperature ..... -10...+50°C
- » storage temperature ..... -20...+60°C
- » reference temperature ..... +23±2°C
- » humidity ..... 20...90%

### Standard accessories:

M6 carrying case	WAFUTM6
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Test lead 15 m, red (banana plugs, on H-frame reel)	WAPRZ015REBBN
Test lead 30 m, yellow (banana plugs, on H-frame reel)	WAPRZ030YEBBN
Test lead 2,2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB
2x earth contact test probe (rod), 25 cm	WASONG25
M1 hanging straps	WAPOZSZE4
M1 hanging hook straps	WAPOZUCH1
4x AA battery, LR6	
Factory calibration certificate	

### Earthing resistance measurement - 3-pole method

measurement range to IEC 61557-5:2007: 0.53 Ω...9999 Ω for 50 V

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(3% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...1999 Ω	1 Ω	±5% m.v.
2000...9999 Ω	1 Ω	±8% m.v.

- » Measurement current: under short circuit >20 mA, frequency 125 Hz or 150 Hz, voltage selectable 25 V or 50 V.
- » Maximum interference voltage, at which  $R_E$  measurement is performed, equals 24 V.


















### Earthing resistance measurement - 2-pole method

Display range	Resolution	Accuracy
0.00...19.99 Ω	0.01 Ω	±(3% m.v. + 3 digits)
20.0...199.9 Ω	0.1 Ω	
200...1999 Ω	1 Ω	±5% m.v.
2000...9999 Ω	1 Ω	±8% m.v.

- » Measurement current: under short circuit >20 mA, frequency 125 Hz or 150 Hz, voltage selectable 25 V or 50 V.
- » Maximum interference voltage, at which  $R_E$  measurement is performed, equals 24 V.






















Photo	Name	Index	MRU-200-GPS (L2)	MRU-200-GPS (XL3)	MRU-200 (L2)	MRU-200 (XL3)	MRU-120HD	MRU-120 (L2)	MRU-120 (XL3)	MRU-30	MRU-21	MRU-12	MRU-10	ERP-1
	ERP-1 adapter for earth resistance measurements	WAADAERP1	•	•	•	•	•	•	•					
	ERP-1 adapter for earth resistance measurements with FS-2 flexible coil	WAADAERP1V2	•	•	•	•	•	•	•					
	ERP-1 adapter for earth resistance measurements with FSX-3 flexible coil	WAADAERP1V3	•	•	•	•	•	•	•					
	F-1A flexible coil (Ø360 mm)	WACEGF1AOKR	•	•	•	•								•
	F-2A flexible coil (Ø235 mm)	WACEGF2AOKR	•	•	•	•								•
	F-3A flexible coil (Ø120 mm)	WACEGF3AOKR	•	•	•	•								•
	F-4A flexible coil (Ø630 mm)	WACEGF4OKR	•	•	•	•								•
	FS-2 flexible coil (Ø1260 mm)	WACEGFS2OKR	•	•	•	•								•
	FSX-3 flexible coil (Ø630 mm)	WACEGFSX3OKR	•	•	•	•								•
	N-1 transmitting clamp (Ø52 mm)	WACEGN1BB	•	•	•	•	•	•	•	•				
	C-3 current clamp (Ø52 mm)	WACEGC3OKR	•	•	•	•	•	•	•	•				
	Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01	1	1	1	1	•	1	1	1	1	1	1	
	Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	1	1	1	1	•	•	•	•	•	•	•	
	Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	•	•	•	•	•	•	•	•	1	1	•	
	Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	1	1	1	1	•	1	1	1	•	•	•	

## MRU

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	MRU-200-GPS (L2)	MRU-200-GPS (XL3)	MRU-200 (L2)	MRU-200 (XL3)	MRU-120HD	MRU-120 (L2)	MRU-120 (XL3)	MRU-30	MRU-21	MRU-12	MRU-10	ERP-1
	Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB	•	•	•	•	•	•	•	•	1	•	•	
	Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB	•	•	•	•	•	•	•	•	•	•	•	
	Double-wire test lead 2 m, for N-1 clamps (banana plugs)	WAPRZ002DZBB	•	•	•	•	•	•	•	•				
	Test lead 2.2 m, black, 1 kV (banana plugs)	WAPRZ2X2BLBB	1	1	1	1	•	1	1	1	1	1	1	
	Test lead 2.2 m, red, 1 kV (banana plugs)	WAPRZ2X2REBB	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 2.2 m, blue, 1 kV (banana plugs)	WAPRZ2X2BUBB	•	•	•	•	•	•	•	•	•	1	•	
	Test lead 2.2 m, yellow, 1 kV (banana plugs)	WAPRZ2X2YEBB	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 4 m black 1 kV (banana plugs)	WAPRZ4X0BLBB	•	•	•	•	1	•	•	•	•	•	•	
	Test lead 4 m blue 1 kV (banana plugs)	WAPRZ4X0BUBB	•	•	•	•	1	•	•	•	•	•	•	
	Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ	•	•	•	•	•	•	•	•	1	•	•	
	Test lead with banana plug; 15 m; red	WAPRZ015REBBN	•	•	•	•	•	•	•	•	•	1	1	
	Test lead with banana plug; 15 m; blue	WAPRZ015BUBBN	•	•	•	•	•	•	•	•	•	1	•	
	Test lead 25 m, red (banana plugs, on a reel)	WAPRZ025REBBSZ	1	1	1	1	•	1	1	1	•	•	•	
	Test lead 25 m, blue (banana plugs, on a reel)	WAPRZ025BUBBSZ	1	1	1	1	1	1	1	•	•	•	•	
	Test lead 30 m, red (banana plugs, on a reel)	WAPRZ030REBBSZ	•	•	•	•	•	•	•	•	1	•	•	
	Test lead with banana plug; 30 m; red	WAPRZ030REBBN	•	•	•	•	•	•	•	•	•	•	•	
	Test lead with banana plugs; 30 m; yellow	WAPRZ030YEBBN	•	•	•	•	•	•	•	•	•	1	1	

Photo	Name	Index	MRU-200-GPS (L2)	MRU-200-GPS (XL3)	MRU-200 (L2)	MRU-200 (XL3)	MRU-120HD	MRU-120 (L2)	MRU-120 (XL3)	MRU-30	MRU-21	MRU-12	MRU-10	ERP-1
	Test lead 40 / 60 / 80 m, yellow (banana plugs, on a reel)	WAPRZ040YEBBSZ WAPRZ060YEBBSZ WAPRZ080YEBBSZ	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 50 m, yellow (banana plugs, on a reel)	WAPRZ050YEBBSZ	•	•	•	•	1	1	1	1	•	•	•	
	Test lead 50 m, yellow (banana plugs, on a reel, shielded)	WAPRZ050YEBBSZE	1	1	1	1								
	Test lead 75 / 100 / 200 m, red (banana plugs, on a reel)	WAPRZ075REBBSZ WAPRZ100REBBSZ WAPRZ200REBBSZ	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 75 / 100 / 200 m, blue (banana plugs, on a reel)	WAPRZ075BUBBSZ WAPRZ100BUBBSZ WAPRZ200BUBBSZ	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 75 / 100 / 200 m, yellow (banana plugs, on a reel)	WAPRZ075YEBBSZ WAPRZ100YEBBSZ WAPRZ200YEBBSZ	•	•	•	•	•	•	•	•	•	•	•	
	Test lead 75 / 100 / 200 m, yellow (banana plugs, on a reel, shielded)	WAPRZ075YEBBSZE WAPRZ100YEBBSZE WAPRZ200YEBBSZE	•	•	•	•								
	Pin probe, black 1 kV (banana socket)	WASONBLOGB1	•	•	•	•	•	•	•	•	•	•	•	
	Pin probe, red 1 kV (banana socket)	WASONREOGB1	•	•	•	•	•	1	1	1	•	•	•	
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1	•	•	•	•	•	•	•	•	•	•	•	
	Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1	•	•	•	•	•	•	•	•	•	•	•	
	Earth contact test probe (rod), 25 cm	WASONG25	•	•	•	•	•	•	•	•	•	4	2	
	Earth contact test probe (rod), 30 cm	WASONG30	4	4	4	4	4	4	4	2	2	•	•	
	Earth contact test probe (rod), 80 cm	WASONG80V2	•	•	•	•	•	•	•	•	•	•	•	
	Cramp	WAZACIMA1	1	1	1	1	2	1	1	1	•	•	•	
	NiMH battery 4.8 V 4.2 Ah	WAAKU07	1	1	1	1		•	•					
	NiMH battery 4.8 V 3.2 Ah	WAAKU08						1	1					



## MRU

Set of standard and optional accessories








1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	MRU-200-GPS (L2)	MRU-200-GPS (XL3)	MRU-200 (L2)	MRU-200 (XL3)	MRU-120HD	MRU-120 (L2)	MRU-120 (XL3)	MRU-30	MRU-21	MRU-12	MRU-10	ERP-1
	NIMH battery 4.8 V 4.2 Ah (replaceable in the SONEL S.A. service)	WAAKU28					1							
	Battery pack	WAP0J1									1			
	Z7 power supply	WAZASZ7	1	1	1	1	1	1	1	1				
	230 V mains cable (IEC C7 plug)	WAPRZLAD230	1	1	1	1	1	1	1	1				
	Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM	1	1	1	1	•	•	•	•				
	Test wire reel	WAP0ZSZP1	•	•	•	•	•	•	•	•	•	•	•	
	L2 hanging straps (set)	WAP0ZSZEKPL	1	1	1	1		1	1		1			
	M1 hanging straps	WAP0ZSZE4										1	1	
	W1 hanging straps	WAP0ZSZE5					1							
	M1 hanging hook straps	WAP0ZUCH1										1	1	
	Cover (universal)	WAP0ZUCH12	•	•	•	•		•	•		•			
	L2 carrying case	WAFUTL2	1	•	1	•		1	•					
	L3 carrying case for a 80 cm rods	WAFUTL3	•	•	•	•	•	•	•	•	•	•	•	
	L4 carrying case	WAFUTL4					1				1			
	L7 backpack	WAFUTL7					•							
	L10 carrying case	WAFUTL10								1				
	L19 backpack	WAFUTL19	•		•			•		•	•			

## MRU

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	MRU-200-GPS (L2)	MRU-200-GPS (XL3)	MRU-200 (L2)	MRU-200 (XL3)	MRU-120HD	MRU-120 (L2)	MRU-120 (XL3)	MRU-30	MRU-21	MRU-12	MRU-10	ERP-1
	M6 carrying case	WAFUTM6										1	1	
	M9 carrying case	WAFUTM9								1				
	XL3 carrying case (accessories not included)	WAWALXL3	•	1	•	1		•	1					
	XL8 carrying case	WAWALXL8												•
	USB cable	WAPRZUSB	1	1	1	1	1	1	1	1	1			
	PC software: Sonel Reports Plus	WAPROREPORTSPLUS	•	•	•	•	•	•	•	•	•	•		
	PC software: Sonel Reader	WAPROREADER	•	•	•	•	•	•	•	•	•	•		

## SONEL MRU MOBILE



Mobile version of the program cooperating with ground resistance and ground resistivity meters **MRU-200** and **MRU-200-GPS**. It can be downloaded from **Google Play**.

Thanks to the application, you can **connect directly to the device** via Bluetooth and download measurement data from the meter. After reading the measurements from the device, they can be easily and quickly **viewed**, and also **sent from the place of measurement** to a person who can help in interpretation of data or make a measurement report.

Thanks to the application, you can enrich the measurement with a photo, comments or voice memo. From the application level, we also have **access to the meter's manual** and help regarding various measurement methods.

Users who do not have a meter can use the set of **sample data** implemented in demo mode.

## SONEL REPORTS PLUS



**Sonel Reports Plus** supports creation of documentation after testing of electrical installation. The software communicates with Sonel test instruments, downloads data from memory of the devices and creates necessary documentation. Many useful functions are included in order to help creating documentation of the measurements. Sonel Reports Plus supports the meter by reading, downloading and uploading test structure from/to test instrument.

- » Every report can contain description page.
- » Tree structure presents a clear picture of the tested building and its rooms. Test structure can be uploaded to the meter and downloaded from it together with test results.
- » User can print labels for test points.
- » For every room user can add picture or scheme of electrical installation.
- » Software contains library of fuses.
- » For every room user can create separate table with test results.

## Temperature measurements

KT-1K / KT-670 / KT-650 / KT-560

KT-550 / KT-530 / KT-525 / KT-520 / KT-510

KT-256F / KT-256 / KT-128

DIT-500  
DIT-200  
DIT-120



# Contactless temperature measurements




**Thermal imaging** is a process based on **processing infrared radiation**, that is the heat emitted by objects, **into a visible image**, making possible to assess temperature distribution on the surface of the observed object without contact.

This is important wherever it is necessary to measure temperature at inaccessible or hazardous locations and also allows for:

- » quick temperature measurement on surfaces of any size,
- » or lightning-fast location of heat escape points invisible to the naked eye related to failures in buildings' insulation and construction errors (thermal bridges for example).

In thermographic analysis, **contactless measurement in the infrared spectrum** is used to determine the temperature of a surface from a distance. Since all objects with a temperature above absolute zero emit thermal radiation of similar characteristics (called black-body radiation), by measuring the radiation and with knowledge of the emissivity coefficient of a given object, its temperature can be determined.


Professional radiometric thermal imaging cameras register temperature separately for each point of the image. For example, in the case of a camera with a 640 x 480 resolution, temperature is registered simultaneously for each of the 307200 points. This makes it possible to conduct detailed analysis of saved thermal images, which display different temperatures as different colors.

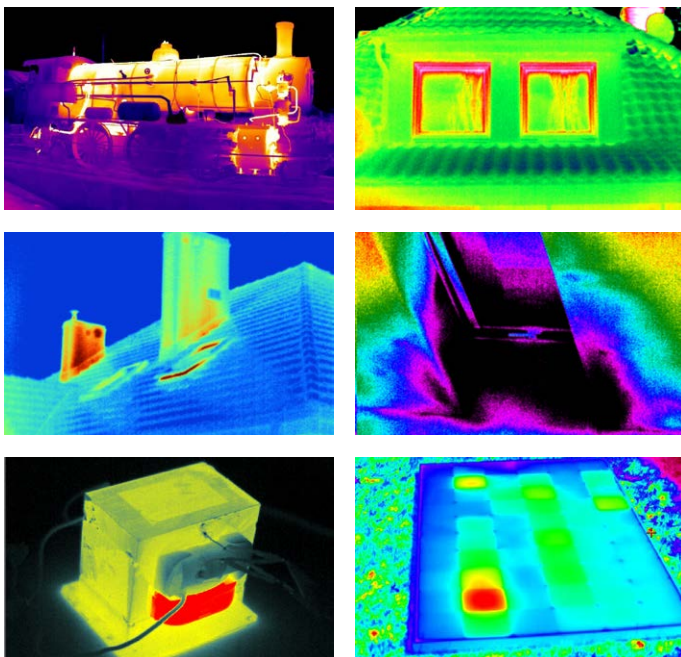


All information saved in a thermogram can be used by specialized software delivered with the thermal imaging camera. During analysis of a thermogram, points with maximum or minimum temperature can be determined, the emissivity coefficient of the whole thermogram or a part of it can be corrected, temperature can be read at any point of the thermogram, mean temperature can be calculated, temperature distribution can be presented in the form of histograms or isotherms, the thermal image can be combined with the real image, just as on the screen of the

camera, which makes it possible to precisely locate places with a specific temperature, and the color palette can be changed arbitrarily to best represent the temperature distribution.

One useful function of thermal imaging cameras is the **capability of taking real-life photographs** as well as **combined image modes** enabling combination of the real-life image with the thermal image and displaying an image in which the thermal image overlaps with the real-life image.

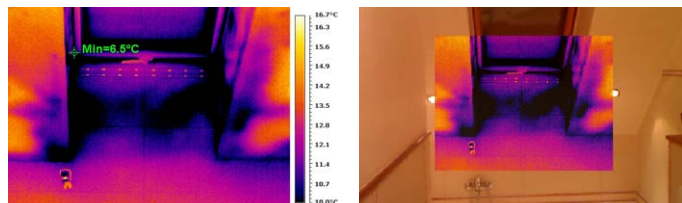

A thermal image is presented on-screen in the color palette selected by the user that best represents individual temperature ranges:

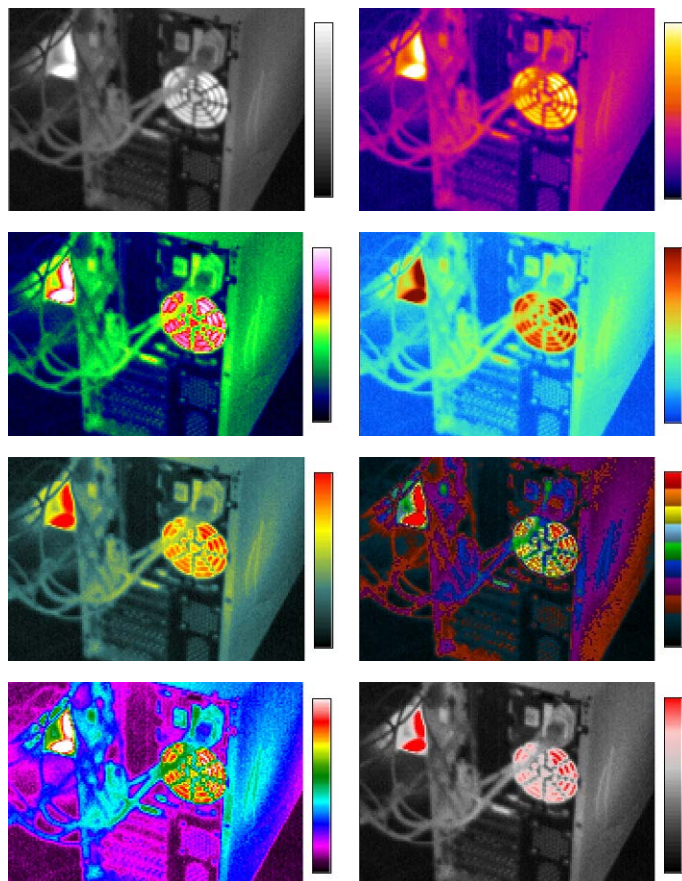

**Infrared thermometers** are also devices that serve for contactless temperature measurement, and they operate on the basis of **analysis of the thermal radiation** emitted by the tested object. These devices are applied whenever it is required to measure wide range of temperatures.

The main **parameters** characterizing an infrared thermometer are: measured temperature ranges, accuracy and **D:S ratio**, which is the ratio of the distance from the object to the diameter of the field for which the measurement is made.

Thanks to their design, pyrometers allow to measure temperature of small objects, also from great distance. The bigger D:S ratio is, the smaller objects can be measured from big distance.



## THERMAL IMAGERS



### INDUSTRIAL APPLICATION


- » high accuracy
- » wide range


## IR THERMOMETERS



### INDUSTRIAL APPLICATION

- » high accuracy
- » wide range

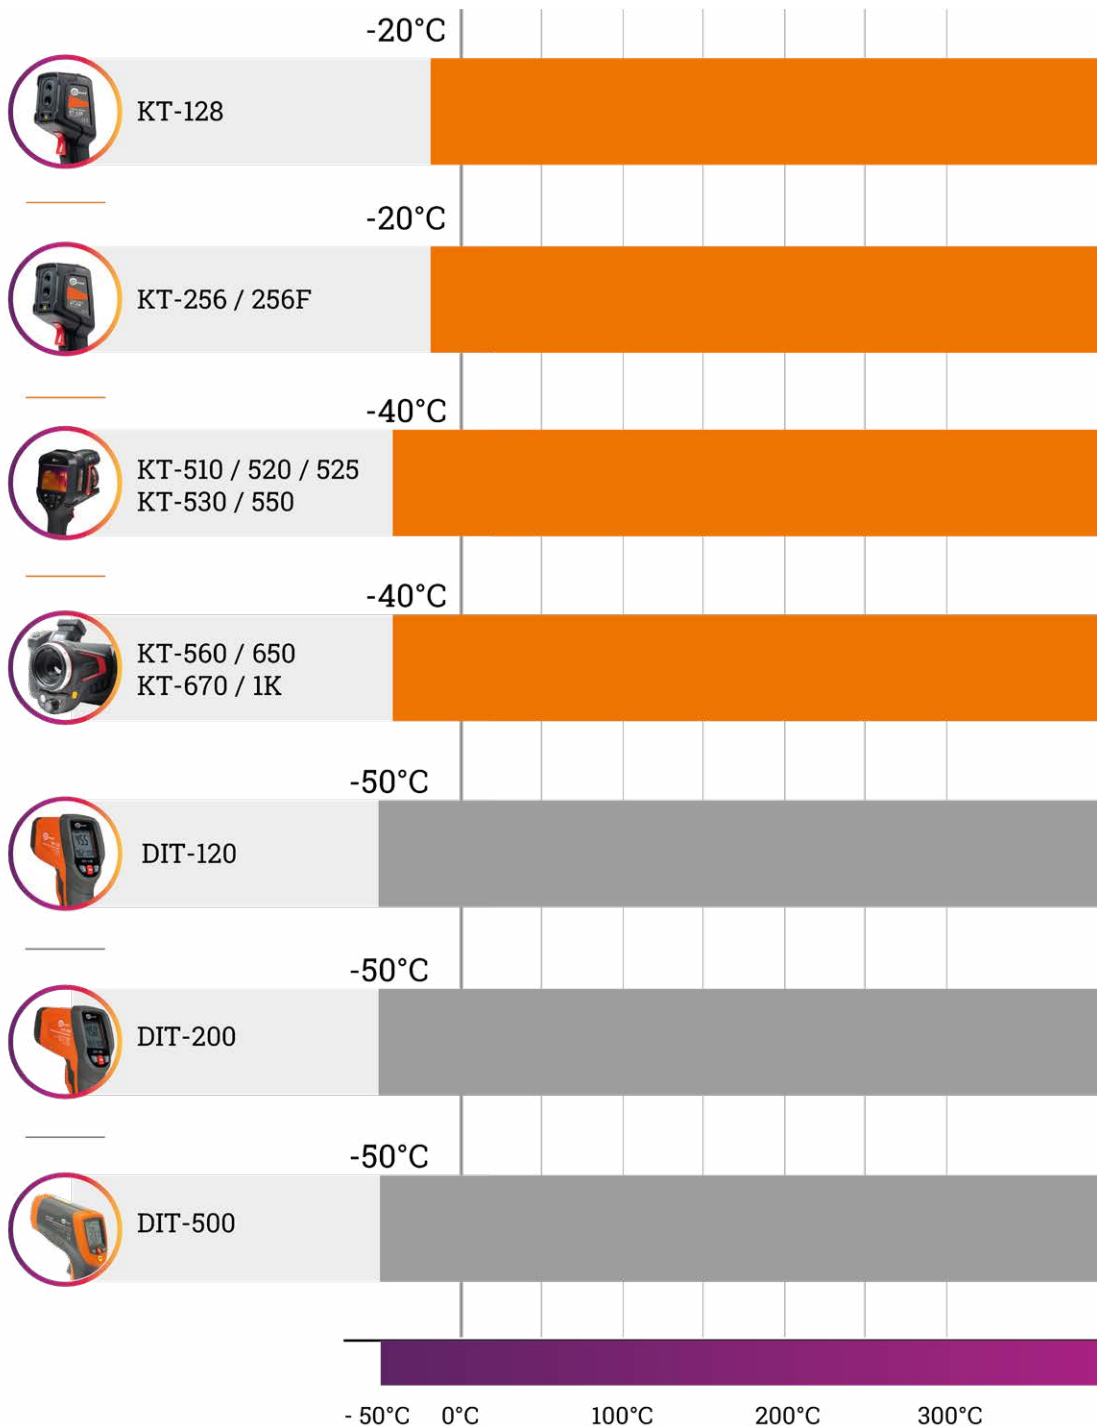

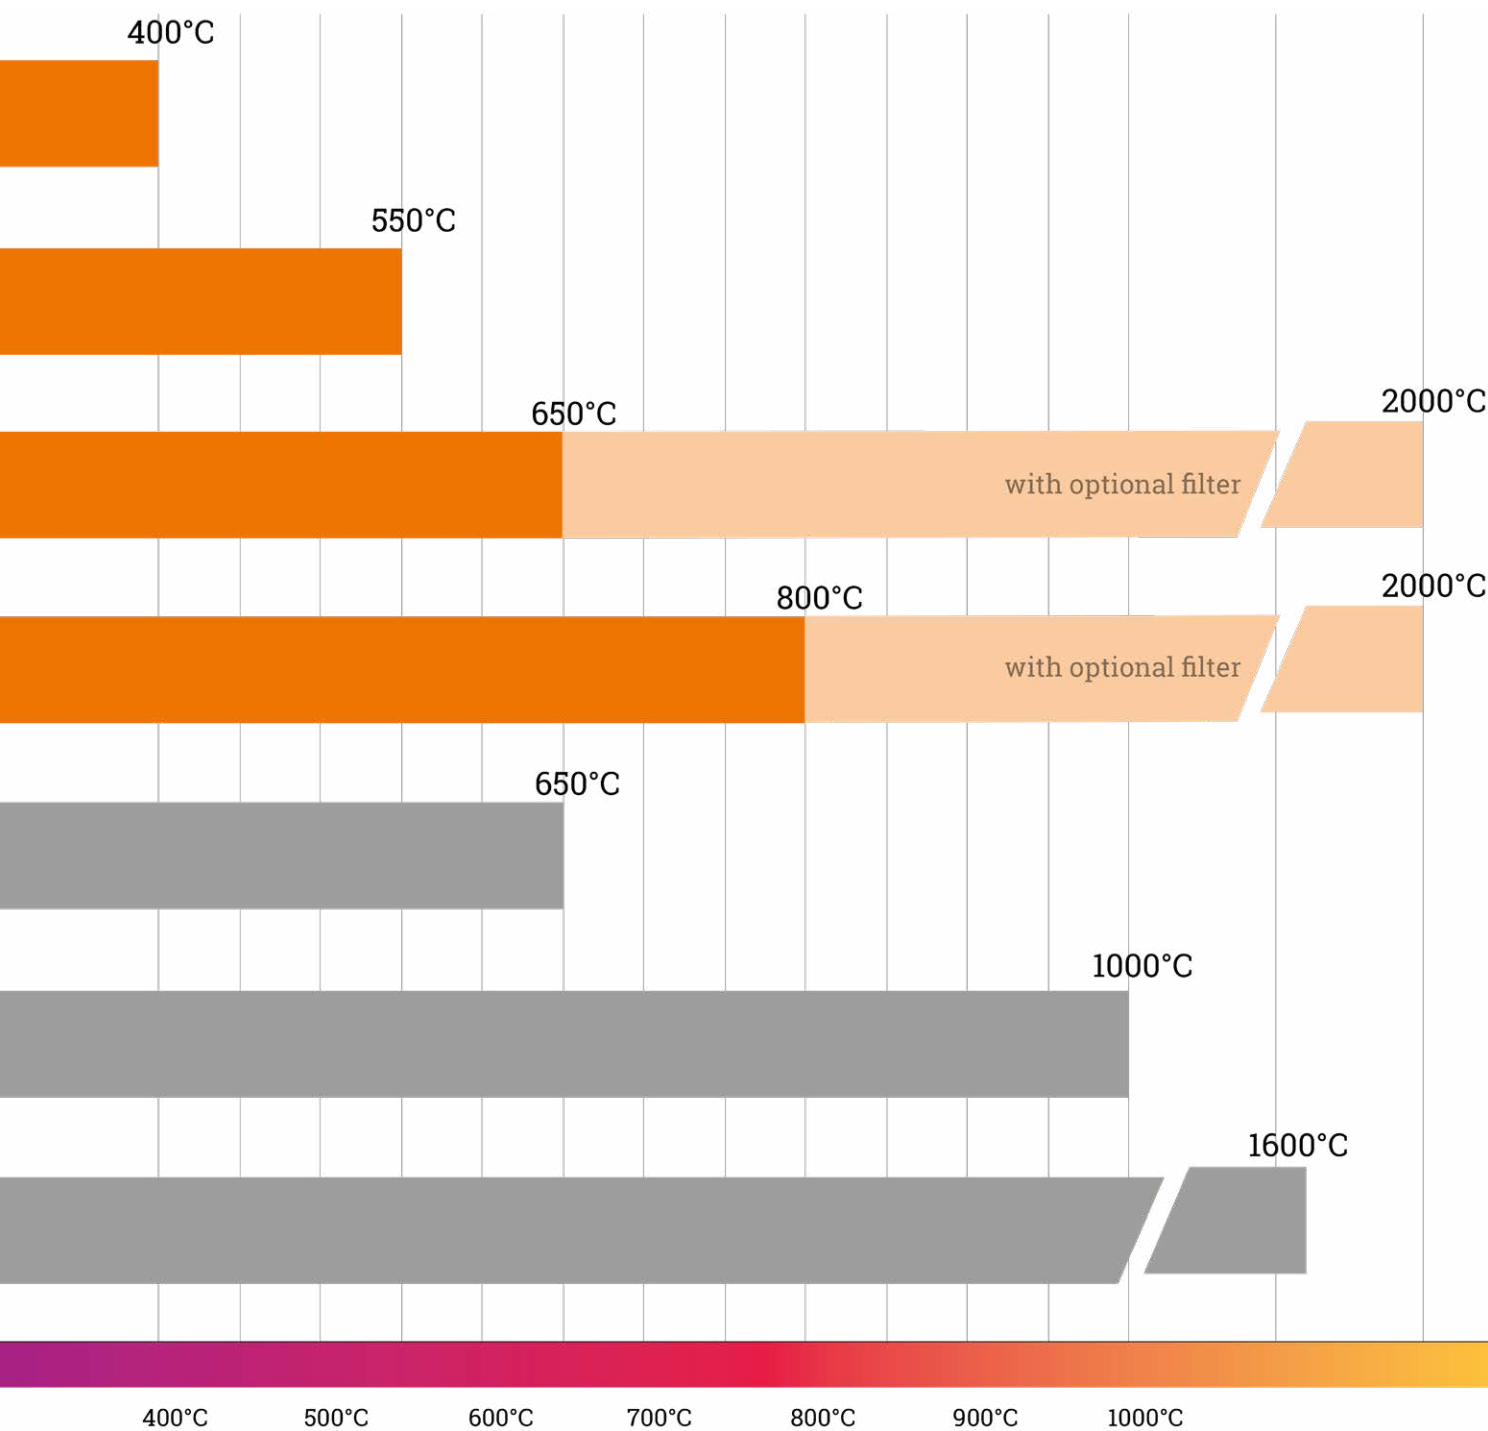



# SONEL KT-1K / KT-670 / KT-650 / KT-560

index: WMGBKT1K / WMGBKT6701 / WMGBKT6501 / WMGBKT5601



	KT-560	KT-650	KT-670	KT-1K
Detector type	384 x 288 / 17 µm	640 x 480 / 17 µm		1024 x 768 / 12 µm
Spectral range	7.5~14 µm			
Sensitivity	45 mK	40 mK	35 mK	≤30 mK
Lens (field of view / focal length / instantaneous field of view / min. focus distance)				
• standard	24.9° x 18.7° / 15 mm / 1.13 mrad / 0.4 m	24.6° x 18.5° / 25 mm / 0.68 mrad / 0.3 m		24.6° x 18.5° / 28 mm / 0.43 mrad / 0.3 m
• wide angle	48.1° x 35.9° / 7.78 mm / 2.19 mrad / 0.15 m	45.4° x 34.8° / 13 mm / 1.31 mrad / 0.15 m		-
• telephoto	11.2° x 8.4° / 33 mm / 0.52 mrad / 2 m	11.3° x 8.5° / 55 mm / 0.31 mrad / 1.5 m		-
• ultra-telephoto	7.3° x 5.5° / 50.7 mm / 0.34 mrad / 4 m	7.3° x 5.5° / 85 mm / 0.2 mrad / 4 m		-
• macro	23.3 mm x 17.5 mm / 67 mm / - / 60.7 µm	23.3 mm x 17.5 mm / 67 mm / - / 37.5 µm		-
• high temp	24.9° x 18.7° / - / -	24.6° x 18.5° / - / - / -		24.6° x 18.5° / - / - / -
Display	5", 1280 x 720 high brightness, LCD touchscreen			
Viewfinder	1280 x 960 LCOS			
Image mode	IR / Visual / Infravision MIF/ PiP			
Zoom	1...10	1...35		
Temperature range	Range 1: -40°C...150°C Range 2: 100°C...800°C Optional: 700°C...2000°C			
Accuracy	±2°C or 2% of reading		±1°C or ±1% of reading	
Image analysis mode	12 points, 12 lines, 12 areas. Temperature readings: min., max., average. Isotherms. Temperature alarm. Smart stroke	16 points, 16 lines, 16 areas. Temperature readings: min., max., average. Isotherms. Temperature alarm. Smart stroke		30 points, 30 lines, 30 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.
Palettes	8	10	12	
Super-resolution	4x, 768 x 576	4x, 1280 x 960		2048 x 1536
Panoramic images	-	✓		
Emissivity coefficient	Set from 0.01 to 1.00			
Measurement correction	Auto-adjustable distance, relative humidity, ambient temperature (reflected)			
Image file format	JPG			
Notes on IR images	Additional visual photos, voice, text recognition, text typing			
Reports module	PDF reports			
Video file format	MP4 (without temp. information), IRGD (including temp. information)			
Built-in functions	Visual camera 13 MPix, LED flashlight, GPS, laser pointer, laser rangefinder, mi-crophone, speaker, digital compass, light sensor.			
Wireless communication	Wi-Fi, Bluetooth			
Storage	Built-in memory (64 GB), SD card, cloud service			
Interfaces	SD card slot (max. 64 GB), LAN 1 Gb/s, micro HDMI, USB type C (data transfer only), tripod			
Power supply	Li-ion battery (4 h of continuous operation), built-in charger, AC adapter 110-230 V, 50/60 Hz			Li-ion battery (3 h of continuous operation), built-in charger, AC adapter 110-230 V, 50/60 Hz
Operating temperature range	-20°C...+50°C			
Storage temperature	-40°C...+70°C			
Humidity	≤95%			
Resistance to shocks / vibrations	30g 11 ms (IEC 60068-2-27)			
Housing	IP54			
Weight	approx. 1.4 kg (with battery)			approx. 1.5 kg (with battery)

Overview

Behold the **highest class of thermal imagers** that offers temperature measurements of substantial accuracy. Robustly designed and constructed, they are ideally suited for:

- » troubleshooting electrical installations, wiring, panels, motors, breakers, transformers, switchgear, and electrical equipment,
- » monitoring the thermal performance of industrial manufacturing processes,
- » identifying overheating of mechanical and electro-mechanical components,
- » inspecting buildings for insulation leaks, energy audits, HVAC/R equipment, water damage, and pests,
- » locating hidden heat sources (of people, animals, objects) in dark or low-light conditions.

The touchscreen as well as the lens swivel independently to view objects of interest that are difficult to access from any angle. The large number of functions, intuitive handling and excellent ergonomics make the KT-560/650/670/1K imagers perfect for **every advanced thermographer**.

Features

- » image files saved in JPG format (complete image data)
- » recording of IR videos (on SD memory card or computer hard disk)
- » built-in reports module
- » MIF image combining mode
- » extensive image analysis tools
- » built-in camera for capturing images within the visible light spectrum
- » built-in: GPS, digital compass, LED flashlight, laser pointer, laser rangefinder
- » interfaces: USB type C, Wi-Fi, Gigabit Ethernet, micro HDMI, SD memory card slot, Bluetooth
- » digital zoom



Imagers have built-in tools for analysis and generating reports on-site.

Standard accessories:		KT-560	KT-650	KT-670	KT-1K
2x Li-Ion battery 10.8 V 3.35 Ah	WAAKU18	✓	✓	✓	✓
Power supply adaptor Z13	WAZASZ13	✓	✓	✓	✓
External battery charger Z14	WAZASZ14			✓	
Type C USB cable	WAPRZUSBC	✓	✓	✓	✓
LAN cable (RJ45)	WAPRZRJ45	✓	✓	✓	✓
Micro HDMI cable	WAPRZMIKROHDMI	✓	✓	✓	✓
SD card 64 GB	WAPZSD64	✓	✓	✓	✓
Shoulder harness	WAPZPAS3	✓	✓	✓	✓
XL9 carrying case	WAWALXL9	✓	✓	✓	✓
Factory calibration certificate		✓	✓	✓	✓




## Thermal imagers

### SONEL KT-550 / KT-530

index: WMGBKT550 / WMGBKT530

### SONEL KT-525 / KT-520 / KT-510

index: WMGBKT525 / WMGBKT520 / WMGBKT510



	KT-510	KT-520	KT-525	KT-530	KT-550
Detector resolution	256 x 192 / 12 μm	320 x 240 / 12 μm	384 x 288 / 12 μm	480 x 360 / 12 μm	640 x 480 / 12 μm
Spectral range	7.5~14 μm VOx				
Thermal sensitivity	≤45 mK				≤40 mK
Focus	Manual / Auto				
IFOV	1.70 mrad	1.36 mrad	1.13 mrad	0.91 mrad	0.68 mrad
Min. focus distance	0.1 m	0.1 m	0.15 m	0.15 m	0.15 m
Lens (field of view/focal length)	25° x 19° / 10.5 mm	25° x 19° / 10.5 mm	25° x 19° / 10.5 mm	25° x 19° / 17.7 mm	25° x 19° / 17.7 mm
Display	4.3", 800 x 480 high brightness, LCD touchscreen				
Image modes	IR / Visual / Infrafusion MIF / PiP				
Digital zoom	1...8	1...8	1...10	1...16	1...20
Temperature range					
• Standard	Range 1: -40°C...150°C Range 2: 0°C...650°C				
• Optional	-	High temperature lens: 500°C...2000°C			
Accuracy	±2°C or ±2% of reading				
Image analysis modes	5 points, 5 lines, 5 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.	8 points, 8 lines, 8 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.	10 points, 10 lines, 10 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.	12 points, 12 lines, 12 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.	16 points, 16 lines, 16 areas. Temperature indication: min, max, average. Isotherm. Temperature alarm. Smart stroke.
Palettes	16				
Super-resolution	2x, 512 x 384	2x, 640 x 480	2x, 768 x 576	2x, 960 x 720	2x, 1280 x 960
Panoramic images	√				
Emissivity coefficient	Selectable from 0.01 to 1.00				
Measurement adjustment	Auto-adjustable distance, relative humidity, ambient temperature (reflected)				
File format	JPG				
IR image annotations	Additional visual photos, voice, text recognition, text typing				
Reports module	PDF reports				
Video file format	MP4 (without temp. information), IRGD (including temp. information)				
Built-in features					
• Visual camera resolution	5 MPix	5 MPix	8 MPix	8 MPix	13 MPix
• Other features	LED flashlight, GPS, laser pointer, laser rangefinder (0.1...40 m), microphone, speaker, digital compass				
Wireless communication	Wi-Fi, Bluetooth				
Storage	Built-in memory (64 GB), SD card				
Interface	SD card slot (max. 256 GB), USB type C, tripod				
Power supply	Li-ion battery (5 h of continuous operation), built-in charger, AC adapter 110-230 V (50/60 Hz)			Li-ion battery (4 h of continuous operation), built-in charger, AC adapter 110-230 V (50/60 Hz)	
Operating temperature	-20°C...+50°C				
Storage temperature	-40°C...+60°C				
Ingress protection	IP54				
Weight	ca. 1.15 kg (with battery)				



Features

Regardless of whether you take photos or record videos, the Sonel KT-510/520/525/530/550 cameras, equipped with modern detectors, a wide range of temperature measurement and high-quality lenses, ensure highly detailed images and accurate measurements. The cameras are available in several versions, thus enabling the appropriate configuration for the user's needs.

Modernity and comfort

A large display with innovative data processing electronics is protected by a solid housing, ensuring the perfect combination of high efficiency and comfortable work.

Moreover, the comfortable handle and easily accessible buttons make the operation highly ergonomic and optimal both for professional and less experienced thermographers.

Thermal imaging is not everything

Cameras are additionally equipped with visual lenses and related image mixing technologies: PIP, MIF. Support from the built-in LED torch and laser improves operational quality by facilitating photography and then image interpretation.

The picture is just the beginning

The built-in report module allows for the preparation and printing out of reports directly from the camera. Built-in communication interfaces ensure constant communication between the camera and the computer or mobile device, also over a wireless network. Thanks to state-of-the-art technologies and solutions, the cameras ensure full control and flexibility in various situations, and are an ideal tool for both novice users and professional thermographic inspectors.

Features

- » image files saved in JPG format (complete image data)
- » recording of IR videos (on SD memory card or computer hard disk)
- » built-in reports module
- » MIF image combining mode
- » extensive image analysis tools
- » built-in camera for capturing images within the visible light spectrum
- » built-in: GPS, digital compass, LED flashlight, laser pointer, laser rangefinder
- » interfaces: USB type C, Wi-Fi, Gigabit Ethernet, SD memory card slot, Bluetooth
- » digital zoom

Standard accessories:

		KT-550	KT-530	KT-525	KT-520	KT-510
2x 7.4 V 3.2 Ah Li-Ion rechargeable battery	WAAKU33	✓	✓	✓	✓	✓
Type C USB cable	WAPRZUSBC	✓	✓	✓	✓	✓
LAN cable (RJ45)	WAPRZRJ45	✓	✓	✓	✓	✓
Adapter for data transmission (USB-C/RJ45)	WAADAUSBCRJ	✓	✓	✓	✓	✓
Wristband	WAPOZPAS8	✓	✓	✓	✓	✓
64 GB SD card	WAPOZSD64	✓	✓	✓	✓	✓
Z-37 battery charger	WAZASZ37	✓	✓	✓	✓	✓
Z-38 external battery charger	WAZASZ38	✓	✓			
XL-16 hard carrying case	WAWALXL16	✓	✓	✓	✓	✓
Factory calibration certificate		✓	✓	✓	✓	✓



## Thermal imager

# SONEL KT-256F / KT-256 / KT-128

index: WMGBKT256F / WMGBKT256 / WMGBKT128



KT-128 • KT-256

### Trigger

Temperature measurement with a single press



KT-256F

Autofocus trigger  
Sharp image with a single press

Trigger  
Temperature measurement with a single press

## Simple thermography

KT-128 / 256 / 256F is a special camera. Economical, practical and handy, it is a powerful tool in everyday work. The camera is used for basic diagnostics. It is equipped with a matrix having a resolution of:

- » **KT-128** | 120 x 90 pixels,
  - » **KT-256 • KT-256F** | 256 x 192 pixels,
- supported by visual camera, laser pointer and additional features to fully meet the needs of users.

## KT-256F | Autofocus

KT-256F is equipped with an automatic focus which ensures that your IR measurement pictures will always be sharp and crisp, no matter the distance.

## Application

KT-128 / 256 / 256F is used always when the temperature of objects is important and may affect the operation of the equipment. Particularly useful in:

- » power engineering,
- » construction sector,
- » industry
- » HVAC.

## Features

- » measuring range:
  - **KT-128** | -20°C...400°C
  - **KT-256 • KT-256F** | -20°C...550°C
- » quick start
- » fast temperature measurement
- » automatic signalling of exceeded alarm threshold
- » **KT-256F** | autofocus
- » saving IR images to SD card
- » built-in Li-Ion battery with:
  - **KT-128** | 5-hour working time
  - **KT-256 • KT-256F** | 16-hour working time
- » interfaces: USB type C, SD slot
- » can be set up on a tripod

## Standard accessories:

		KT-128	KT-256	KT-256F
USB charger	WAZASZ20	✓	✓	✓
Type C USB cable	WAPRZUSBC	✓	✓	✓
16 GB microSD card	WAPOZMSD16	✓	✓	
32 GB microSD card	WAPOZMSD32			✓
Wristband	WAPOZPAS1	✓	✓	✓
Declaration of verification		✓	✓	✓



	KT-128	KT-256	KT-256F
Detector resolution	120 x 90 / 17 μm VOx	256 x 192 / 12 μm VOx	
Spectral range	7.5~14 μm		
Frame rate	25 Hz		
Sensitivity	60 mK	45 mK	
Focus	Fixed		Auto
Lens (field of vision / focal distance)	50° x 38°/2.28 mm	56° x 48°/3.2 mm	25° x 19°/7 mm
Spatial resolution (IFOV)	7.6 mrad	3.75 mrad	1.71 mrad
Display	2.4", 240 x 320 px, LCD		
Image mode	IR / Visual / PiP	IR / Visual / Infrarufusion MIF / PiP	
Temperature range	Range 1: -20°C...+150°C Range 2: 100°C....+400°C	Range 1: -20°C...+150°C Range 2: 100°C....+550°C	
Accuracy	±2°C or ±2% of reading (for ambient temperature 15°C...30°C, object temp. ≥0°C)		
Image analysis mode	Point. 3 areas. Temperature indication: min, max. Temp. alarm		
Palettes	6		
Emissivity	Selectable from 0.01 to 1.00 or from the list		
Measurement adjustment	Adjustable distance, ambient temperature (reflected)		
Image file format	JPG		
Built-in features	Visual camera 2 MPix, LED flashlight, laser pointer		
Interfaces	microSD card slot (max. 32 GB), USB type C, tripod		
Power supply	Li-Ion battery (operating time >5 hours), built-in charger (charging time <2.5 hour), AC adapter 110-230 V, 50/60 Hz	Li-Ion battery (operating time >16 hours), built-in charger (charging time <2.5 hour), AC adapter 110-230 V, 50/60 Hz	
Operating temperature	-10°C...+50°C		-15°C...+50°C
Storage temperature	-40°C...+70°C		
Housing	IP54		
Weight	ca. 0.35 kg	ca. 0.38 kg	

## Software

# SONEL THERMOANALYZE 3


index: WAPROTHERMOANALYZE3




Software for analyses and reports, included with the set of thermal imagers.

Capability of correcting the emissivity coefficient throughout the entire thermogram or part of it – the coefficient can be corrected individually for each selected area.

Analyzed areas selection – drawing of a rectangular area, oval area, area of any shape.

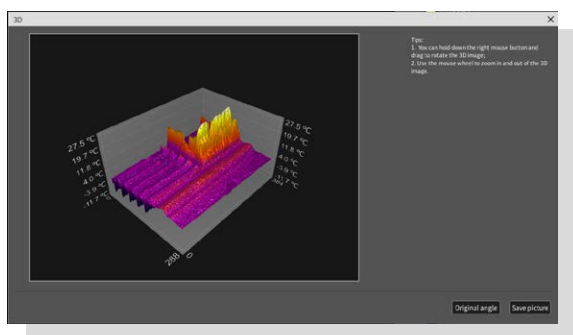


Temperature reading at any point – after scrolling the cursor over to the "Information" window, temperature readouts are displayed continuously along with current coordinates, and other recorded information is also available (maximum temperature, humidity, emissivity).

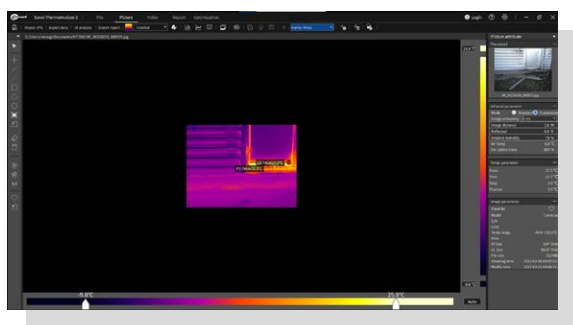


Infra Fusion technology – a thermogram is superimposed onto a part of the visible image, in any palette selected by the user. The thermogram is applied with the selected transparency, making it possible to optimally display and mark areas of interest, particularly when it is difficult to visually compare points on the thermogram with details on the visible image of the observed object.

Determination and reading of minimum, maximum and mean temperature for the entire area and in every marked area of interest. Selection of segment (straight line or polyline).

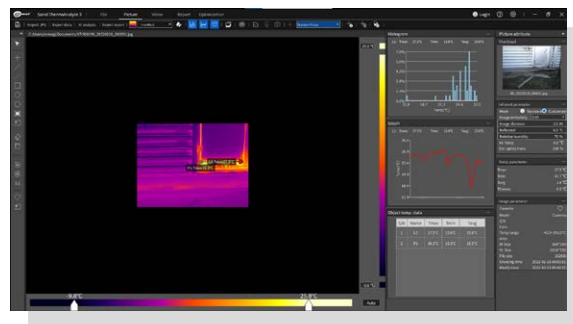

Easy report creation, "drag-and-drop" desired elements into the report – thermograms and the visible images corresponding to them.

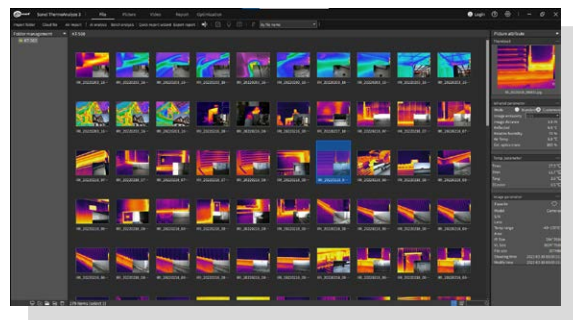

All corrections applied and characteristic points are saved for further analysis at a later time. Selection of the visually optimal color palette (among 9 available in the application) for the best visualization of temperature changes. Configuration of the temperature range for the best imaging of temperature distribution (manual or automatic mode available).


The software has an unlimited license - it can be used simultaneously on multiple devices.

The software is available on the website: [www.sonel.com](http://www.sonel.com).

## SONEL KT MOBILE



A mobile version of the program supporting Sonel thermal imaging cameras. With the application, you can get a preview of the actual image on your phone, and remotely perform a series of other activities by managing the camera from a mobile device. It can be downloaded from [Google Play](https://play.google.com/store/apps/details?id=com.sonel.kt_mobile).

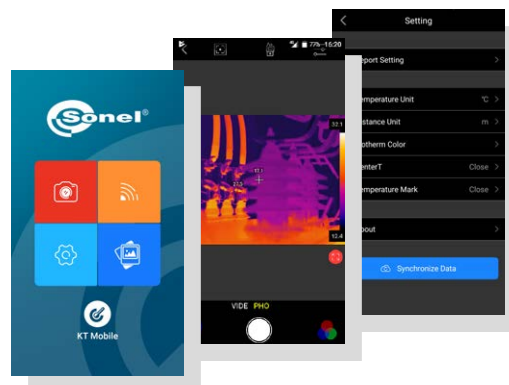



Infrared thermometer

## SONEL DIT-500

index: WMGBDIT500



## SONEL IR THERMOMETER

A program dedicated for the PC. It is used to download results from the memory of the **DIT-500** pyrometer and to supervise continuous temperature measurements by downloading the results in real time.



### Standard accessories:

Mini-USB data transmission cable	WAPRZUSBMNIB5
Temperature measurement probe (type K)	WASONTEMK
Mini tripod	WAPOZSTATYW
Carrying case	
9 V battery	
Factory calibration certificate	

### Measurements

- » Precise non-contact temperature measurement.
- » Emissivity digitally adjustable from 0.10 to 1.00.
- » Resolution from 0.1°C and 0.1°F.
- » Laser pointer: double.
- » Input for type K temperature probe.

### Additional functions

- » Displaying MAX, MIN, AVG, DIF temperatures.
- » Automatic Data Hold
- » Temperature unit selection: °C / °F.
- » High and Low alarm.
- » Backlit LCD display.
- » Auto power off.

### Description

Professional and compact infrared (IR) thermometers are a solution for problems in every area where specific thermal conditions are required. The intuitive one-hand operation of the devices and the ergonomically designed gun-type housing allow for trouble-free daily work.

### Applications

- » HVACR areas.
- » Electrical areas.
- » Mechanical areas.
- » Industry areas.

### Special features

- » Temperature measurements in the range of **-50°C...1600°C**.
- » Operation with an external temperature probe - temperature measurement range **-50°C...1370°C**.
- » D:S ratio of **50:1**.
- » Data memory (LOG) for **100 measurements**.
- » Double laser pointer (marking the measurement area).
- » Transmission of current readings to computer via USB cable.

### Technical specification

		DIT-500
		All advanced measurements in industrial environments
LCD display		segmented, with backlight
Spectral sensitivity		8~14 μm
Emissivity		digitally adjusted from 0.10 to 1.00
Semi-conductor laser diode	output power	<1 mW
	wavelength	630~670 nm
	class	class 2 (II) laser
Power supply		9 V alkaline battery NEDA 1604A or IEC 6LR61
Operating temperature range		0...50°C 32...122°F
Storage temperature		-20...+60°C -4...+140°F
Humidity		10...90%
Indication of range overflow		symbol "----"
Response time		150 ms
Weight		350 g
Dimensions		230 x 155 x 54 mm



## SONEL DIT-200 / DIT-120

index: WMGBDIT200 / WMGBDIT120



### Measurements

- » Precise non-contact temperature measurement.
- » Emissivity digitally adjustable from 0.10 to 1.00.
- » Resolution from 0.1°C and 0.1°F.
- » Laser pointer:
  - DIT-200 | circular,
  - DIT-120 | dual.
- » DIT-200 | Input for type K temperature probe.

### Additional functions

- » Displaying MAX, MIN, AVG, DIF temperatures.
- » Automatic Data Hold
- » Temperature unit selection: °C / °F.
- » High and Low alarm.
- » Backlit LCD display.
- » Auto power off.

### Description

DIT-120 and DIT-200 are pyrometers for professionals. Durable housing, ergonomic grip, buttons accessible with one finger - all this contributes to the comfort of the user. Technical parameters speak for themselves. The advanced laser pointer will precisely and unambiguously indicate the area of the performed measurement.

### Applications

- » Temperature measurement of transformers.
- » Temperature control of busbars and connections.
- » Monitoring the condition of heating and cooling devices.
- » Temperature control of materials in metallurgical processes.
- » Checking the heating of rollers and bearings in transport conveyors.
- » ...and many others.

### Special features

#### DIT-200

- » Temperature measurements in the range of **-50°C...1000°C**.
- » Operation with an external temperature probe - temperature measurement range **-50°C...1370°C**.
- » D:S ratio of **20:1**.
- » Circular laser pointer (marking the measurement area).

#### DIT-120

- » Temperature measurements in the range of **-50°C...650°C**.
- » D:S ratio of **12:1**.
- » Double laser pointer (marking the measurement area).

#### Standard accessories - DIT-200:

Temperature measurement probe (type K)	WASONTEMK
Holster	WAFUTS5
2x AAA 1.5 V battery	
Factory calibration certificate	

#### Standard accessories - DIT-120:

Holster	WAFUTS5
2x AAA 1.5 V battery	
Factory calibration certificate	

### Technical specification


	DIT-200	DIT-120
LCD display	segmented, with backlight	
Spectral sensitivity	8~14 μm	
Emissivity	digitally adjusted from 0.10 to 1.00	
Semi-conductor laser diode	output power	<1 mW
	wavelength	630~670 nm
	class	class 2 (II) laser
Power supply	2x AAA 1.5 V battery	
Operating temperature range	0...50°C 32...122°F	
Storage temperature	-10...+60°C 14...+140°F	
Humidity	10...90%	
Indication of range overflow	symbol "----"	
Response time	150 ms	
Weight	242 g	231 g
Dimensions	170 x 50 x 95 mm	170 x 50 x 85 mm



## KT / DIT

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories


Photo	Name	Index	KT-1K	KT-670	KT-650	KT-560	KT-550	KT-530	KT-525	KT-520	KT-510	KT-256F	KT-256	KT-128	DIT-500	DIT-200	DIT-120
	Adapter for data transmission (USB-C/RJ45)	WAADAUSBCRJ					1	1	1	1	1						
	Adapter – converter HDMI / RCA	WAADAHDMIXRCP		•	•	•											
	Li-Ion battery 10.8 V 3.35 Ah	WAAKU18	2	2	2	2											
	Li-Ion battery 7.2 V 3.2 Ah	WAAKU33					2	2	2	2	2						
	MicroSD card 16 GB	WAP0ZMSD16											1	1			
	MicroSD card 32 GB	WAP0ZMSD32										1					
	SD card 64 GB	WAP0ZSD64	1	1	1	1											
	High temperature filter (up to 2000°C)	WAADAOF1		•	•	•											
	High temperature filter (up to 2000°C)	WAADAOF3					•	•	•	•							
	Wide-angle IR lens 6 mm (44°x34°)	WAADA06V5XX							•	•	•						
	Wide-angle IR lens 7.78 mm (48.1°x35.9°)	WAADA08V560				•											
	Wide-angle IR lens 10 mm (44°x34°)	WAADA010V5XX					•	•									
	Wide-angle IR lens 13 mm (45.4°x34.8°)	WAADA013V6701		•	•												
	Tele IR lens 17,5 mm (15°x11°)	WAADA018V5XX							•	•	•						
	Tele IR lens 29 mm (15°x11°)	WAADA029V5XX					•	•									



## KT / DIT

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	KT-1K	KT-670	KT-650	KT-560	KT-550	KT-530	KT-525	KT-520	KT-510	KT-256F	KT-256	KT-128	DIT-500	DIT-200	DIT-120
	Tele IR lens 33 mm (11.2°x8.4°)	WAADA033V560				•											
	Tele IR lens 55 mm (11.3°x8.5°)	WAADA055V6701		•	•												
	Ultra tele IR lens 37,5 mm (7°x5°)	WAADA0375V5XX							•	•	•						
	Ultra tele IR lens 62.9 mm (7°x5°)	WAADA063V5XX					•	•									
	Macro IR lens 16,2 mm (3x)	WAADA016V5XX					•	•									
	Wristband	WAPOZPAS1										1	1	1			
	Shoulder harness	WAPOZPAS3	1	1	1	1											
	Wristband	WAPOZPAS8					1	1	1	1	1						
	Type C USB cable	WAPRZUSBC	1	1	1	1						1	1	1			
	USB cable MINI-B 5	WAPRZUSBMNIB5													1		
	MicroHDMI cable	WAPRZMIKROHDMI	1	1	1	1											
	LAN cable (RJ45)	WAPRZRJ45	1	1	1	1											
	Type K Temperature Probe	WASONTEMK													1	1	
	Temperature probe (type K, metal)	WASONTEMK2													•	•	
	Additional Pin Probe with banana plugs	WASONTEMP													•	•	

## KT / DIT

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	KT-1K	KT-670	KT-650	KT-560	KT-550	KT-530	KT-525	KT-520	KT-510	KT-256F	KT-256	KT-128	DIT-500	DIT-200	DIT-120
	M11 carrying case	WAFUTM11		•	•	•											
	M13 carrying case	WAFUTM13													•		
	S1 carrying case	WAFUTS1										•	•	•		•	•
	XL9 carrying case	WAWALXL9	1	1	1	1											
	XL16 carrying case	WAWALXL16					1	1	1	1	1						
	Power supply adaptor Z13	WAZASZ13	1	1	1	1											
	Power supply adaptor Z20	WAZASZ20										1	1	1			
	Power supply adaptor Z37	WAZASZ37					1	1	1	1	1						
	External battery charger Z14	WAZASZ14	1	1	•	•											
	External battery charger Z38	WAZASZ38					1	1	•	•	•						
	Mini tripod	WAPOZSTATYW													1		

## High voltage measurements

S-120 DC / S-110 DC / S-80 DC / S-50 DC / S-25 DC  
S-57 VLF / S-44 VLF / S-36 VLF / S-24 VLF

UV-260



## SONEL S-120 DC / S-110 DC / S-80 DC / S-50 DC / S-25 DC

index: WMGBS25DC / WMGBS50DC / WMGBS80DC / WMGBS110DC / WMGBS120DC

### S-50 DC / S-80 DC / S-110 DC / S-120 DC

#### S-25 DC



#### Features

- » Easy operation
- » Robust construction, low weight
- » Integrated timer:
  - S-25 DC | max. 30 min (standard)
  - S-50 / 80 / 110 / 120 DC | max. 60 min (option)
- » Discharge device:
  - S-25 DC | integrated (S-25 DC),
  - S-50 / 80 / 110 / 120 DC | external ground-discharge rod
- » S-25 DC | Internal battery charger with deep discharge protection
- » Voltage measurement direct at HV output
- » Short-circuit-proof output:
  - S-25 DC | electronically limited output current
  - S-50 / 80 / 110 / 120 DC | protection by overcurrent tripping
- » Protective ground connection
- » S-25 DC | Mains-independent by internal rechargeable battery

#### Overview

The S-xx DC series devices are universal high voltage testers. They are extremely robust, but also lightweight, compact and easily portable thanks to a transport case on wheels (only for S-50 / 80 / 110 / 120 DC).

Capacitive loads, such as shielded power cables, will be properly and automatically discharged in case of an error or at the end of testing time by the integrated discharge device. Key switch, switch-on interlock and a protective ground circuit ensure maximum safety. S-25 DC stands out in particular. Not just with modest dimensions. Thanks to an internal rechargeable battery it enables mains-independent testing.

#### Fields of application

- » Testing at recommissioning of cable systems after maintenance and repair
- » Testing of newly installed cables and cable joints before commissioning
- » S-25 DC | Voltage testing at cable sheath
- » S-50 DC / 80 DC / 110 DC / 120 DC | Regular preventive cable testing
- » Testing of electrical equipment

#### Standard accessories - S-25 DC:

Protective bag	
Power cable	
Connection cables for external DC power supply	
Protective ground cable, 3 m	
Operation ground cable, 3 m	
High voltage connecting cable (shielded), 3 m	
Service pack	
Start keys	

#### Standard accessories - S-50 DC / S-80 DC / S-110 DC / S-120 DC:

Protective bag	
Discharge rod	
Protective ground cable, 3 m	
Operation ground cable, 3 m	
High voltage connecting cable, 2 m	
Service pack	
Start keys	

#### Optional accessories - S-25 DC:

Transport case	
Transport case with wheels	WAWALXXL1

#### Optional accessories - S-50 DC / S-80 DC / S-110 DC / S-120 DC:

Transport case	
Transport case with wheels	WAWALXXL2



	S-25 DC	S-50 DC	S-80 DC	S-110 DC	S-120 DC
Power supply	internal rechargeable battery mains, switchable 115 / 230 V, 50-60 Hz external DC voltage source 11...15 V DC		mains 230 V / 50 Hz (optional: 115 V / 60 Hz)		
Power consumption	max. 120 VA		max. 900 VA		
Output voltage	0...25 kV DC infinitely adjustable negative polarity ripple < 0,25%	0...50 kV DC infinitely adjustable negative polarity	0...80 kV DC infinitely adjustable negative polarity	0...110 kV DC infinitely adjustable negative polarity	0...120 kV DC infinitely adjustable negative polarity
Rated output current at max. output voltage	1.5 mA electronically limited	6 mA	5 mA	4 mA	3.5 mA
Battery operation at full load	45 min		-		
Discharge - integrated automatic discharge device	3000 J 9.6 µF at 25 kV	7500 J 6 µF at 50 kV	12 250 J 4 µF at 75 kV 3.5 µF at 80 kV	15 000 J 3 µF at 100 kV 2.5 µF at 110 kV	18 750 J 2.4 µF at 125 kV 2.6 µF at 120 kV
Voltage measuring range	0...30 kV	0...50 kV	0...80 kV	0...110 kV	0...130 kV
Current measuring ranges	0...200 µA / 0...2 mA manual or automatic switching between ranges		0...100 µA / 1 mA / 10 mA manual switching between ranges		
Operating temperature			-25...+55°C		
Storage temperature			-40...+70°C		
Weight	Operating unit	13.5 kg		13 kg	
	High voltage unit	-	17 kg	18.5 kg	20 kg
Dimensions	Operating unit	473 x 152 x 275 mm		370 x 200 x 280 mm	
	High voltage unit	-	210 x 380 x 310 mm	210 x 400 x 310 mm	210 x 420 x 310 mm



## SONEL S-57 VLF / S-44 VLF / S-36 VLF / S-24 VLF

index: WMGBS57VLF / WMGBS44VLF (230 V) / WMPAS44VLF (110 V) / WMGBS36VLF / WMGBS24VLF



- » Extremely compact high-power VLF test device
- » Easily portable for 1-2 people
- » Simple operation: menu-assisted control with industrial class OLED display
- » Fully automatic test sequence
- » Integrated timer 1-300 min with automatic tripping
- » Integrated breakdown detection
- » Integrated fault time detection
- » Voltage measurement direct at HV output
- » Protective ground connection
- » High voltage start key interlock
- » Protective circuit / indication in accord. with EN 50191
- » Leakage current measurement during VLF test

### Overview

The compact, robust and portable S VLF cable test sets are used for testing of medium voltage cables in accordance to the standards IEEE400, IEC 60502-2, CENELEC HD 620 & 621 and DIN VDE 0276/620 & 621. The test is carried out with a low strain practice with VLF (very low frequency) test voltage at 0.1 Hz frequency.

VLF test enables detection of damages of the insulation within shortest test time. The S VLF series device can test cables with extruded insulation (XLPE-, PE-, EPR-insulation) as well as cables with paper-oil insulation (PILC). Cable sheath testing with direct voltage is also possible.

### Optional features

- » Data logging (USB stick) for VLF test sets
- » Frequency extension: 0.05 + 0.02 Hz
- » Customized test cables
- » Transport case

## SONEL VLF TESTER SOFTWARE

index: WAPROVLFTS

The programme **Sonel VLF Tester Software** generates a test report based on the individual recorded data files.

The first page of the generated report is an overview. The following pages describe the individual tests of the power cable system. The software is easy to use, so you can quickly create a PDF report that is attractive to the end user.

<b>Insulation Testing:</b>		[x] from (A)	[ ] from (R)				
Desired Values:	Method:	[x] VLF [ ] DC	Test Voltage:	36 kV	Test Time:	60 min	
Measured Values	L1-L2 L3-E	L2-L1 L3-E	L3-L1 L2-E	L1 L2 L3-E	L1 L2-L3-E	L1 L3-L2-E	L2 L3-L1-E
Test Voltage (kV rms)	36.0 kV	36.0 kV	36.0 kV	36.0 kV			
Frequency (Hz)	0.1 Hz	0.1 Hz	0.1 Hz	0.1 Hz			
DC Voltage (kV)	---	---	---	---			
Test Time (min)	60:00 min	60:00 min	2:47 min	37:04 min			
Breakdown	at kV	---	42.7 kV	44.4 kV			
	after min	---	3:47 min	37:04 min			
<b>Sheath Testing:</b>		[x] from (A)	[ ] from (B)				
Measured Values	*S <sub>11</sub> →E	*S <sub>12</sub> →E	*S <sub>13</sub> →E	*S <sub>111111</sub> →E	Desired Values:		
DC Voltage (kV)					Test Voltage (DC):		
Test Time (min)					Test Time:		
breakdown	yes/no						
<b>Test Result:</b>		Fault occurred!					
Comments to the Test:		Insulation Fault on L3, Repair or Replacement					

### Standard accessories:

High voltage connecting cable (shielded) 5 m	
Bridging cables	
Connecting cable between high voltage unit and station ground	
Connecting cable between operation unit and protective ground	
Service pack	
Start keys	
Case	WAWALVLF

### Optional accessories:

USB stick for data logging	WAADAHVVLFDL
Case with wheels	WAWALVLF2
Frequency extension 0.05 Hz + 0.02 Hz	WAADAHVVLFFE
Sonel VLF Tester Software	WAPROVLFTS





		S-24 VLF	S-36 VLF	S-44 VLF (230 V)	S-44 VLF (110 V)	S-57 VLF
Power supply		230 V (±10%) 10 A, 50/60 Hz	230 V (±10%) 10 A, 50/60 Hz	230 V (±10%) 10 A, 50/60 Hz	110 V (100 V...127 V) 15 A, 50/60 Hz	230 V (±10%) 10 A, 50/60 Hz
Output voltage		0...24 kV <sub>RMS</sub> VLF 0.1 Hz (option: 0.05 Hz + 0.02 Hz) ± 0...34 kV DC	0...36 kV <sub>RMS</sub> VLF 0.1 Hz (option: 0.05 Hz + 0.02 Hz) ± 0...52 kV DC	0...44 kV <sub>RMS</sub> VLF 0.1 Hz (option: 0.05 Hz + 0.02 Hz) ± 0...62 kV DC	0...44 kV <sub>RMS</sub> VLF 0.1 Hz (option: 0.05 Hz + 0.02 Hz) ± 0...62 kV DC	0...57 kV <sub>RMS</sub> VLF 0.1 Hz (option: 0.05 Hz + 0.02 Hz) ± 0...62 kV DC
Voltage waveshape	VLF	similar sine-wave, symmetrical, with True RMS measurement				
	DC	direct voltage, negative and positive polarity				
Overcurrent trip (DC)		10 mA				
Max. testable cable length, max. capacitance (VLF)		up to 60 km (15 µF at 24 kV <sub>RMS</sub> * 0.02 Hz)*	up to 60 km (15 µF at 18 kV <sub>RMS</sub> * 0.02 Hz)*	up to 60 km (15.0 µF at 18 kV <sub>RMS</sub> * 0.02 Hz)*	up to 60 km (15.0 µF at 6 kV <sub>RMS</sub> * 0.02 Hz)*	up to 60 km (15.0 µF at 18 kV <sub>RMS</sub> * 0.02 Hz)*
*at a cable capacitance of approx. 0.25 µF/km						
Max. load at max. output voltage (VLF) and 0.1 Hz		5 µF at 24 kV <sub>RMS</sub>	2.4 µF at 36 kV <sub>RMS</sub>	1.6 µF at 44 kV <sub>RMS</sub>	1.0 µF at 44 kV <sub>RMS</sub>	0.55 µF at 57 kV <sub>RMS</sub>
Discharge - integrated automatic discharge device		max. 9000 J	max. 12500 J	max. 12500 J	max. 12500 J	max. 12500 J
Voltage measuring range		-40...0...40 kV accuracy ±1%	-60...0...60 kV accuracy ±1%	-70...0...70 kV accuracy ±1%	-70...0...70 kV accuracy ±1%	-70...0...70 kV accuracy ±1%
Current measuring ranges		±0...100 µA / 1 mA / 10 mA				
Operating temperature		-20...+45°C				
Storage temperature		-25...+70°C				
Duty		continuous operation				
PC interface		USB stick				
Construction		in two parts: operation unit and high voltage unit				
Dimensions and weight	Operation unit	37 x 34 x 20 cm 17 kg				
	High voltage unit	40 x 41 x 24 cm 38 kg	40 x 44 x 24 cm 48 kg	40 x 44 x 24 cm 49 kg	40 x 44 x 24 cm 49 kg	40 x 44 x 24 cm 49 kg



## SONEL UV-260

index: WMGBV260



### Specifications of UV section

Image type	Monochromatic
Minimum UV sensitivity	$2.2 \times 10^{-18} \text{ W/cm}^2$
Minimum detectable discharge	1 pC from a distance of 10 meters
Spectral range	UV 240 ... 280 nm
Field of vision (WxS)	5.5° x 4.0°
Sharpness setting	Automatic and manual (UV and visible spectrum)
Sharpness range	2 m ... ∞
Detector life	Non-consumable
Frequency:	50 Hz

### Specifications of visible spectrum section

Image type	Full color
Accuracy of UV/visible image superposition	Better than 1 milliradian
Minimum sensitivity	0.1 lux
Zoom	25x optical and 12x digital

### Display

Type	Unfolding 5.7" VGA touch LCD
Video standard	PAL/NTSC
Imaging modes	Combined (UV & visible) / only UV / only visible
Discharge color	White, red, blue

### Processing and communication

Video standard	H.264
Alarm	Audio, LED
Operation	Buttons and touch LCD
Audio module	Microphone input for audio notes
GPS module	✓

### Data storage

Memory type	SD memory card
Image file format	JPG
Video file format	AVI
Memory capacity	8000 images or >4 hours of video (for 2 GB card)
File transfer	USB, card reader

### Power supply

Power consumption	10 W
Battery type	Li-Ion (2 pcs. in set)
Operating time on battery power	2 hours
Charging	External or internal charger
External power supply	9-12 V, 10 VA
Power adapter	110-240 V AC, 50/60 Hz / 12 V DC 3.8 A

### Other specifications

Operating temperature range	-10°C ... +50°C
Storage temperature	-25°C ... +60°C
Relative Humidity	95% without condensation
Dimensions	238 x 165 x 91 mm
Weight	2.5 kg
Power input	✓
SD card slot	✓
Video output	CVBS
Audio input / output	Microphone / headphones

### Standard accessories:

Power supply	
2x Li-Ion rechargeable battery 7.2 V 2.2 Ah	WAAKU22
External battery charger	WAADALB220
RCA/RCA video cable	WAPRZVIDRCA
Battery charging cable for 12 V car sockets	WAPRZLAD12SAM1
Camera strap	WAPRZSZEUV260
Headphone set with microphone	WAPRZSLU2
Hard briefcase	WAWALXL11
SD card 4 GB	WAPRZSD4

### Description of the device:


The UV-260 is a high-class, professional, and simultaneously lightweight and intuitive device enabling quick and simple remote diagnostics of a system without interfering in its operation. Its design, placing emphasis on high functionality, allows for detection and monitoring of corona, arc and surface discharges in power engineering. This is a way to continuously analyze the technical condition of equipment, e.g. an HV power line, and locate problems before damage or serious failure occurs.



UV-260 is an innovative solution in the field of UV radiation detection!

### Additional features:

- » precise location of discharge sources,
- » recording and playback of videos and images,
- » high UV sensitivity,
- » automatic sharpness for UV and visible image,
- » automatic noise reduction,
- » 5.7" touch LCD,
- » no sensitivity to sunlight during operation in full daylight,
- » additional LED alarm in the event of UV radiation detection,
- » built-in GPS,
- » PC software for data transmission and generating reports.

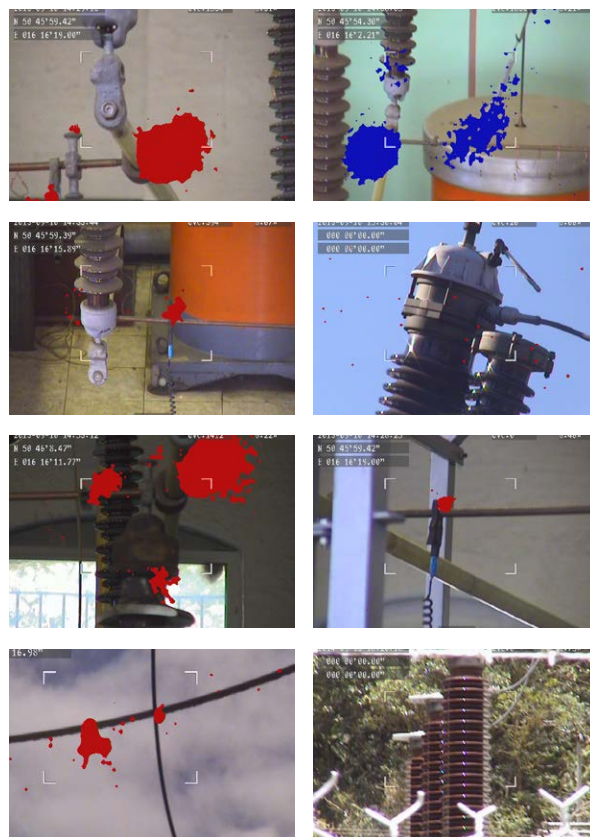



## Low resistance meters

MMR-6700  
MMR-6500



MMR-650



MMR-630  
MMR-620




## Low resistance measurements

Low resistance measurements are made when testing the resistance of the following connections: welded, equipotential, contacts, cable connections and coils of low resistance. Meters for low resistance measurement are also used to test motor and transformer windings. These tests also include testing the quality of solder joints or continuity of earthing cables.

Low resistance measurements may be performed by several methods. The most popular is the **technical method**.

For small resistance values (microohms), the wiring and contact resistances in connection points are of significant importance. Therefore, the design of the bridge provides separate current and voltage terminals at the  $R_x$  and  $R_p$  resistors. It is recommended that all other resistors have a resistivity 1000 times greater than the resistance of the leads.

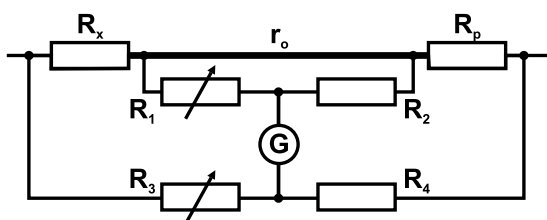

Circuit diagram of Thomson bridge

At the balanced state of the bridge, the current flowing in the branch of the galvanometer is equal to zero. The formula for the measured resistance is as follows:


$$R_x = \frac{R_p R_1}{R_2}$$

The accuracy of the measurement with Thomson bridge is affected insensitivity deviation, which for low resistances of  $R_x = 10^{-6} \dots 10^{-5} \Omega$  order is particularly evident. The accuracy also depends on the error in recreating the model, which is related to the quality of particular elements of the bridge. During the measurement, there may be additional errors due to current overloads of the tested and reference resistors, temperature changes and the presence of additional electromotive forces in the system.

Due to defectiveness and limitations of traditional technical bridges, currently we witness a tendency to construct electronic meters for the measurement of low resistances in the range from single micro-ohms to several hundred ohms. Instruments can measure very small resistances even with a resolution of  $0.1 \mu\Omega$ . An important feature of modern micro-ohm meters is ease of use, application of different measurement modes and the option to cooperate with a computer. These devices measure the resistance using the technical method. Any conductive element may be described by the formula according to Ohm's law:

$$R_x = \frac{U_x}{I}$$

$U_x$  - voltage drop in tested object,  
 $I$  - intensity of flowing current,  
 $R_x$  - measured resistance.

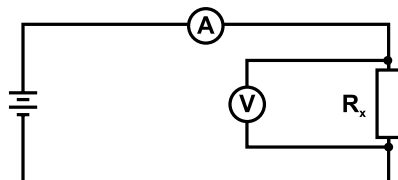

Resistance measurement using technical method  
(circuit with correctly measured voltage)

The circuit with correctly measured voltage is used for small resistances, when the current flowing through the tested object is several times greater than the current of the voltmeter, which measures the voltage drop on the object. The resistance obtained by the measurement is calculated from the formula:

$$R_x = \frac{U_x}{I - I_v}$$

$I_v$  - current flowing through the voltmeter.



Measurements with MMR-650

With a voltmeter of very high resistance, the current flowing in its circuit is negligibly low, so the measurement result is not affected by the resistance of test leads. This is so called 4-pole method. This type of measurement, which eliminates the impact of the resistance of wires, is used in low resistance meters of MMR series.

Due to very low values of the measured resistance, the four-wire method is used, which allows user to perform accurate measurements without taking into account the impact of the resistance of test leads. Therefore, the manual calibration of the meter and test leads is not necessary, but it is possible (e.g. when using other type of test probes). In addition, it is always possible to restore the factory calibration settings of the device.

Before starting the measurement, select the maximum measurement current (range: from 0.1 mA to 10 A). The measuring range (and thus the current) is selected manually or automatically. In some cases (e.g. exceeding the allowable power generated at the object), it may be desirable to limit the maximum current flowing through the tested object. MMR devices have a lock that allows user to set the upper limit of the measuring current.

The device measures the resistance by causing a current to flow through the tested object (using current leads), at the same time controlling the voltage drop across the terminals of the voltage lines. A break in any circuit will be adequately signalled and the resistance measurement will not be possible.

### Operating mode

The user selects the measurement method in one of available modes:

- » in manual mode, each measurement must be triggered by the operator by pressing "Start" button;
- » in automatic mode, the measurement starts at the moment of connecting the last measurement terminal
- » for the continuous mode, measurements are performed every three seconds (resistive mode) or continuously (inductive mode).

The measurements may be performed using the current:

- » flowing only in one direction or
- » flowing in two opposite directions.

Testing with unidirectional current makes the measurements faster, whereas using bidirectional current eliminates errors resulting caused by the presence of internal voltages and electrothermal forces in the tested object. The main result of measurements using the bidirectional current is the average of two measurements of the resistance with the currents flowing in opposite directions. In addition, supplemental results are displayed, i.e.  $R_f$  resistance with the current flowing in theoretical "forward" direction and  $R_b$  resistance with the current flowing in theoretical "backward" direction.

The normal duration of the measurement is 3 seconds. In order to measure an inductive object, the extended measurement time may be selected. For objects with a high inductance, the measurement time is extended to a few minutes and after completed measurement, the tested object is discharged.

There is an option of using fast measurement mode for inductive devices/objects (FAST mode), which at a slightly lower accuracy accelerates the measurement procedure.

Another operation mode is the window mode, which allows the user to set the upper and lower limits for the measurement result. Results outside this range are additionally signalled by the meter.

The limits of the acceptable range of variability of results are determined by the user.

When using the automatic and continuous mode, exceeding the pre-set range limits will interrupt a series of measurements and the meter will wait for a reaction of the user.

## Contact resistance meters

# SONEL MMR-6700 / MMR-6500

index: WMGBMMR6700 / WMGBMMR6500



## Application

MMR-6xxx micrometers series are devices with a **state of art design** with unprecedented approach to measuring small resistances. The instruments allow to **measure resistive objects with a high current** and have a unique in his measurement class module for inductive current objects **up to 10 A**.

## Device capabilities

Sonel microohmmeter MMR-6xxx series thanks to the use of special algorithms, measuring functions and a stabilized, non-pulsing measurement current allow user to work in difficult conditions. Possibility of use measurement current **up to 200 A** and a high power source allows you to measure the contacts of the HV switch with basic uncertainty from 0.25%.

## Simplicity of readings

The MMR-6700 microcontroller is equipped with readable, touch screen, 5 inch color display with a resolution of 800x480 pixels for convenience of readings measurement results.

## Help system

The use of a large, readable display allowed for use helpful appetent drawings how to use the meter.

## Product features

- » measurements of resistive objects with current up to **100/200 A**
- » measurements of induction objects **up to 10 A**
- » measurements of objects earthed on both sides (i.e. main joints of HV switches)
- » measurement with one- or both-way current flow
- » high immunity to outside interference
- » measurements temperature of windings
- » automatic compensation temperature of objects measured
- » a state of the art interface with a touch screen and expanded memory
- » work with a printer and a 2D barcode reader
- » Wi-Fi, USB and LAN communication
- » IP67

## Measurements of contact resistance using high current

Range	Resolution	Accuracy	Test current
0.0...999.9 $\mu\Omega$	0.1 $\mu\Omega$	$\pm(0.25\% + 2 \text{ digits})$	100 A < I $\leq$ 200 A*
0.0...999.9 $\mu\Omega$	0.1 $\mu\Omega$		50 A < I $\leq$ 100 A
1.0000...1.9999 m $\Omega$	0.0001 m $\Omega$		20 A < I $\leq$ 50 A
0.0...999.9 $\mu\Omega$	0.1 $\mu\Omega$		10 A < I $\leq$ 20 A
1.0000...3.9999 m $\Omega$	0.0001 m $\Omega$		
0.0...999.9 $\mu\Omega$	0.1 $\mu\Omega$		
1.0000...7.9999 m $\Omega$	0.0001 m $\Omega$		


\* MMR-6700 only

## Measurements of resistance and inductive objects using low current

Range	Resolution	Accuracy	Test current
0...999.9 $\mu\Omega$	0.1 $\mu\Omega$	$\pm(0.25\% + 2 \text{ digits})$	10 A
1.0000...1.9999 m $\Omega$	0.0001 m $\Omega$		10 A
2.000...19.999 m $\Omega$	0.001 m $\Omega$		10 A / 1 A
20.00...199.99 m $\Omega$	0.01 m $\Omega$		1 A / 0.1 A
200.0...999.9 m $\Omega$	0.1 m $\Omega$		0.1 A
1.0000...1.9999 $\Omega$	0.0001 $\Omega$		10 mA
2.000...19.999 $\Omega$	0.001 $\Omega$		
20.00...199.99 $\Omega$	0.01 $\Omega$		
200.0...1999.9 $\Omega$	0.1 $\Omega$		

## Standard accessories:

2x crocodile clip, black, 1 kV, 32 A	WAKROBL30K03
2x Kelvin clamp, 1 kV, 25 A	WAKROKELK06
Current carrying test lead 3 m black I1 (200 A, 25 mm <sup>2</sup> )	WAPRZ003BLI1
Current carrying test lead 3 m black I2 (200 A, 25 mm <sup>2</sup> )	WAPRZ003BLI2
Test lead 3 m blue 1 kV U1 (banana plug)	WAPRZ003BUBBU1
Test lead 3 m blue 1 kV U2 (banana plug)	WAPRZ003BUBBU2
Doble-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU1I1
Doble-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU2I2
USB cable	WAPRZUSB
Mains cable with IEC C19 plug	WAPRZZAS1
ST-3 temperature probe	WASONT3
Case L4	WAFUTL4
Factory calibration certificate	

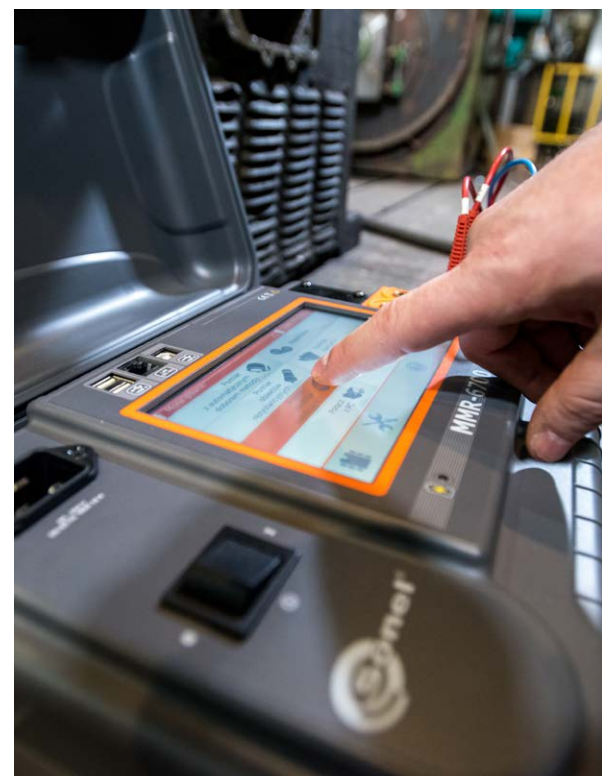



## Winding and low resistance meter

# SONEL MMR-650

index: WMGBMMR650



CAT IV

300 V

IP67

closed cover

IP54

open cover

TOUCH SCREEN

## Product features

- » measurement of winding resistance (including amorphous core transformers)
- » transformer core demagnetization function
- » automatic temperature compensation function (temperature probe)
- » function of determining the temperature of a motor under load
- » high immunity to disturbances
- » measurement of resistant objects using bipolar current

## Application

The MMR-650 winding resistance and low resistance meter is designed to measure very low very low resistance of both windings - including amorphous core transformers - and resistive objects. This product is made to be used in power plants, railways and maintenance companies to measure:

- » windings of power transformers and motors,
- » breakers, contacts,
- » earthing conductors, equipotential bondings,
- » welded and soldered connections,
- » bolted connections,
- » and other resistive and inductive objects.

MMR-650 can be also utilized on production lines (eg. at the final production control stage).

## Device capabilities

The MMR-650 winding resistance and low resistance meter provides an innovative combination of a **high-performance measuring device** with a **modern user interface** and advanced **data management system**. Wireless data transmission, enhanced system of 2D codes and ability to print labels to identify test items, all contribute to bringing new quality of work and allow the user to perform a wide range of measurements.

## Easy readout

The MMR-650 winding resistance and low resistance meter is equipped with a readable colour touchscreen that, due to its 800 x 480 pixel resolution, provides both high comfort of interacting with the interface and high readability of the measurement results.

## Durable and practical casing

In response to the customers needs the MMR-650 microohmmeter has been designed to operate in difficult environmental conditions. A unique casing with the IP67 ingress protection rating ensures that the device is both waterproof and dustproof.


## Resistance measurement

Range [Ω]	Resolution [Ω]	Accuracy*	Test current
0...999.9 μ	0.1 μ	±(0.2% + 2 digits)	10 A
1.0000...1.9999 m	0.0001 m		10A
2.000...19.999 m	0.001 m		10 A/1 A
20.00...199.9 m	0.01 m		1 A/0.1 A
200.0...999.9 m	0.1 m		0.1 A
1.0000...1.9999	0.0001		10 mA
2.000...19.999	0.001		1 mA
20.00...199.99	0.01		
200.0...1999.9	0.1		

\*for resistive objects

## Standard accessories:

L11 carrying case	WAFUTL11
2x Kelvin clamp, 1 kV, 25 A	WAKROKELK06
Doble-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU111
Doble-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU212
Mains cable with IEC C13 plug	WAPRZ1X8BLIEC
USB cable	WAPRZUSB
2x double-tip Kelvin probe (banana sockets)	WASONKEL20GB
ST-3 temperature probe	WASONT3
Li-Ion 7.2 V rechargeable battery	WAAKU27
Factory calibration certificate	

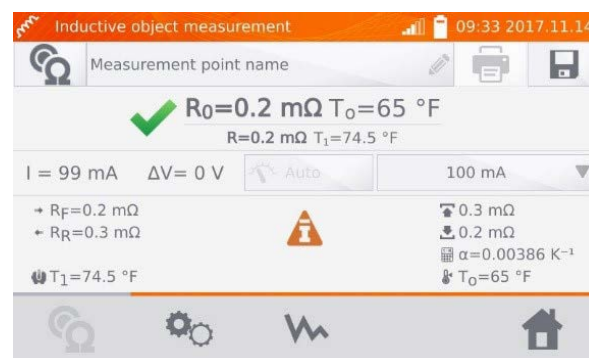

The MMR-650 allows single-channel measurement resistance of transformer windings with amorphous cores.



## SONEL MMR-630 / MMR-620

index: WMGBMMR630 / WMGBMMR620



CAT III

300 V

IP54

### Measurements of objects resistive in nature:

- » welded and soldered connections, equipotential bondings, earthing conductors,
- » contacts, welds of rails, conductors and cables,
- » measurement according to the four-lead method.

### Measurements of objects inductive in nature:

- » motor windings,
- » low-resistance coils.

### Additional functions of the meters:

Automatic or manual selection of measuring range (measurement of objects of an inductive nature).

### Selection of measurement mode according to the type of measured object:

- » fast measurement (3 seconds) for measurement of objects of a resistive nature,
- » extended measurement for testing of objects of an inductive nature (accelerated mode, with slightly worse accuracy, available); with automatic discharging of the object after measurement.

### Selection of measurement mode depending on application (including control of product series):

- » measurement in **normal** mode - triggered when the "START" button is pressed,
- » measurement in **automatic** mode - the instrument awaits connection of all four test leads to the object, after which it automatically start measurement in one or both directions and calculates the mean resistance value,
- » measurement in **continuous** mode - the meter repeats successive measurement cycles with breaks every 3 seconds (for objects of a resistive nature) or performs measurement continuously (for objects of an inductive nature).

### Window mode:

- » makes possible to set an upper and lower limit within the measurement result should remain; sound signal triggered when the result is beyond set range,
- » capability of performing measurements even under disturbances of a value five times greater than the measured signal.

### Instruments meet the requirements set forth in the standards:

- » EN 61010-1 (general and particular requirements related to safety)
- » EN 61010-031 (general and particular requirements related to safety)
- » EN 61326 (electromagnetic compatibility)
- » HD 60364-6 (performance of measurements - checking)
- » HD 60364-4-41 (performance of measurements - shock protection)

### Standard accessories:

NiMH rechargeable battery 4.8 V 3 Ah	WAAKU03
L-1 carrying case	WAFUTL1
4x black "crocodile" clip 1 kV 32 A	WAKROBL30K03
2x Kelvin clamp 1 kV 25 A	WAKROKELK06
Two-core cord; 3 m (10 / 25 A) U1/I1	WAPRZ003DZBBU111
Two-core cord; 3 m (10 / 25 A) U2/I2	WAPRZ003DZBBU212
230 V mains cable (IEC C7 plug) (MMR-630)	WAPRZLAD230
RS-232 serial transmission cable	WAPRZRS232
2x double-tip Kelvin probe (banana sockets)	WASONKEL20GB
Meter strap (Unisonel type)	WAPOZSZE1
Factory calibration certificate	

### Resistance measurement

MMR-620		MMR-630		Test current
Range	Resolution	Range	Resolution	
0...999 µΩ*	1 µΩ	0...999.9 µΩ	0.1 µΩ	10 A
1.000...1.999 mΩ	0.001 mΩ	1.0000...1.9999 mΩ	0.0001 mΩ	
2.00...19.99 mΩ	0.01 mΩ	2.000...19.999 mΩ	0.001 mΩ	
20.0...199.9 mΩ	0.1 mΩ	20.00...199.99 mΩ	0.01 mΩ	1 A
200...999 mΩ	1 mΩ	200...999.9 mΩ	0.1 mΩ	0.1 A
1.000...1.999 Ω	0.001 Ω	1.0000...1.9999 Ω	0.0001 Ω	
2.00...19.99 Ω	0.01 Ω	2.000...19.999 Ω	0.001 Ω	
20.0...199.9 Ω	0.1 Ω	20.00...199.99 Ω	0.01 Ω	1 mA
200...1999 Ω	1 Ω	200.0...1999.9 Ω	0.1 Ω	0.1 mA

Accuracy ±(0.25% m.v. + 2 digits)

"m.v." = "measured value"

### Other technical specifications:

- » type of insulation ..... double, as per EN 61010-1 and IEC 61557
- » meter power supply ..... SONEL/Ni-MH 4.8 V rechargeable battery pack
- » charger ..... built-in
- » battery charging time ..... approx. 2.5 hours
- » number of measurements with 10 A current ..... 300
- » time until auto-OFF ..... 120 seconds
- » electric hum immunity ..... additional error ≤1% for 50 Hz voltage  
..... ≤100 mV RMS
- » maximum lead resistance for 10A current ..... 100 mΩ
- » measurement current input accuracy ..... ±10%
- » time of resistance measurement:
  - resistance mode, with two-directional current flow ..... 3 seconds
  - induction mode ..... max 10 min (depends on R and L of the object)
- » dimensions ..... 295 x 222 x 95 mm
- » meter weight ..... approx. 1.7 kg
- » operating temperature range ..... 0...+40°C



MMR-630/620 microohmmeters enable accurate measurements of both connections resistance (welded, soldered, bolted) and winding resistance of electrical motors and power transformers.

Test leads for measuring low resistance and testing lightning protection of wind turbines

Compatible accessories

## WAADAPRZxxxBDP

**Test lead 25 m** | index: WAADAPRZ025BDP

**Test lead 50 m** | index: WAADAPRZ050BDP

**Test lead 75 m** | index: WAADAPRZ075BDP

**Test lead 100 m** | index: WAADAPRZ100BDP

Test lead 25 m



Test lead 50 m / 75 m / 100 m



### Capabilities

Sonel BDP test leads series has been designed for effective measurement of lightning protection of wind turbines and precise measurements of low resistance. Together with compatible accessories, it is a comprehensive solution for controlling very large objects.

Together with Sonel MMR-650 low resistance meter, the test leads enable measurements of small resistance with a measuring current of **up to 10 A**, at long distances - even **up to 150 m**. This is especially important in situations where resistance is significant!

### Overview

Sonel BDP test leads are a reliable tool for professionals who measure low resistances and monitor the effectiveness of lightning protection in the area of wind turbines. They consist of a current conductor and a voltage conductor, protected by a common, durable braid. Sonel BDP test leads have different lengths (25, 50, 75, 100 m), which allow to create a measurement system for specific distance requirements. They are compatible with **Sonel MMR-650** low resistance meter.

The test leads are terminated with separate banana plugs on one end and an integrated PAT socket on the other. The latter allows you to connect accessories that have been developed for use when measuring wind turbines.

Sonel BDP test leads are made of the highest quality materials, characterized by both high conductivity and ruggedness to mechanical damages. The quality of workmanship, durability and flexibility of configuration make them indispensable equipment for specialists who care about the safety and efficiency of renewable energy installations.

### Features

#### WAADAPRZxxxBDP

- » Impact resistant connector
- » PAT socket
- » Protective braid
- » Reels for convenient carrying

#### UIW-1

- » PAT plug / banana plug adapter

#### WS-10

- » 2-pin Kelvin probe
- » PAT plug

#### Kelvin KEL-2

- » Kelvin clamp
- » PAT plug

## WA...

**Kelvin KEL-2** | index: WAZACKEL2

**Kelvin 20GB** | index: WASONKEL20GB

**Kelvin 20GB2** | index: WASONKEL20GB2

**Kelvin K-06** | index: WAKROKELK06

**UIW-01** | index: WAADAUIW01

**WS-10** | index: WAADAWS10




WS-10

Kelvin KEL-2



UIW-01

+

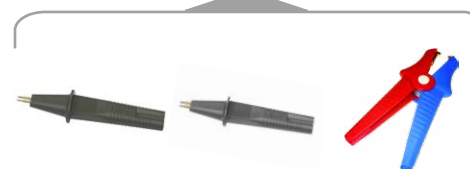

Kelvin 20GB

Kelvin 20GB2

Kelvin K-06

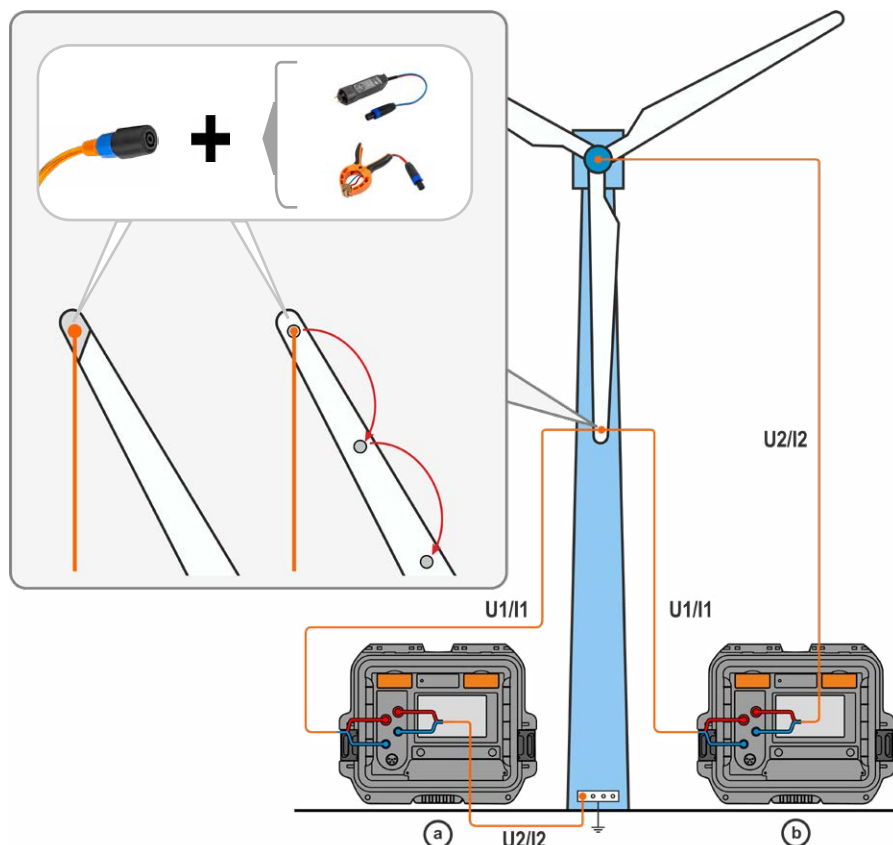










Photo	Name	Index	MMR-6700	MMR-6500	MMR-650	MMR-630	MMR-620
	Small resistance standard	WAADAWMR2			•		
	USB / RS-232 converter	WAADAUSBRS232				•	•
	C-5A current clamp (Φ39 mm)	WACEGC5AOKR	•	•			
	Barcode scanner 2D (USB)	WAADACK2D	•	•	•		
	D2 portable USB report / barcode printer (Sato)	WAADAD2	•	•	•		
	L1 carrying case	WAFUTL1				1	1
	L7 backpack	WAFUTL7	•	•			
	L4 carrying case	WAFUTL4	1	1			
	L11 carrying case	WAFUTL11			1		
	Crocodile clip, black, 1 kV, 32 A	WAKROBL30K03	2	2		4	4
	Kelvin clamp, 1 kV, 25 A	WAKROKELK06	2	2	2	2	2
	Double-wire test lead 10 m (Kelvin crocodile clip / banana plug)	WAPRZ010DZBKEL			•		
	Double-wire test lead 3 m (10 A / 25 A) U1/I1	WAPRZ003DZBBU1I1	1	1	1	1	1
	Double-wire test lead 3 m (10 A / 25 A) U2/I2	WAPRZ003DZBBU2I2	1	1	1	1	1
	Double-wire test lead 6 m / 10 m / 15 m (10 A / 25 A) U1/I1	WAPRZ006DZBBU1I1 WAPRZ010DZBBU1I1 WAPRZ015DZBBU1I1	•	•	•	•	•
	Double-wire test lead 6 m / 10 m / 15 m (10 A / 25 A) U2/I2	WAPRZ006DZBBU2I2 WAPRZ010DZBBU2I2 WAPRZ015DZBBU2I2	•	•	•	•	•
	Double-wire test lead 25 m	WAADAPRZ025BDP			•		
	Double-wire test lead 50 m / 75 m / 100 m	WAADAPRZ050BDP WAADAPRZ075BDP WAADAPRZ100BDP			•		
	Current carrying test lead black I1 3 m (200 A, 25 mm²)	WAPRZ003BLI1	1	1			
	Current carrying test lead black I2 3 m (200 A, 25 mm²)	WAPRZ003BLI2	1	1			
	Current carrying test lead black I1 6 m / 10 m / 15 m (200 A, 25 mm²)	WAPRZ006BLI1 WAPRZ010BLI1 WAPRZ015BLI1	•	•			
	Current carrying test lead black I2 6 m / 10 m / 15 m (200 A, 25 mm²)	WAPRZ006BLI2 WAPRZ010BLI2 WAPRZ015BLI2	•	•			

Photo	Name	Index	MMR-6700	MMR-6500	MMR-650	MMR-630	MMR-620
	Test lead 3 m blue 1 kV U1 (banana plug)	WAPRZ003BUBBU1	1	1			
	Test lead 3 m blue 1 kV U2 (banana plug)	WAPRZ003BUBBU2	1	1			
	Test lead blue 1 kV U1 (banana plug) 6 m / 10 m / 15 m	WAPRZ006BUBBU1 WAPRZ010BUBBU1 WAPRZ015BUBBU1	•	•			
	Test lead blue 1 kV U2 (banana plug) 6 m / 10 m / 15 m	WAPRZ006BUBBU2 WAPRZ010BUBBU2 WAPRZ015BUBBU2	•	•			
	USB cable	WAPRZUSB	1	1	1		
	RS-232 serial transmission cable	WAPRZRS232				1	1
	Mains cable with IEC C13 plug	WAPRZ1X8BLIEC			1		
	Mains cable with IEC C19 plug	WAPRZZAS1	1	1			
	230 V mains cable (IEC C7 plug)	WAPRZLAD230				1	
	LAN cable (RJ45)	WAPRZRJ45	•	•	•		
	Protective gloves (for operating the touchscreen)	WAREK1	•	•			
	Temperature probe ST-1	WASONT1	•	•	•		
	ST-3 temperature probe	WASONT3	1	1	1		
	Double pin Kelvin probe with banana connector	WASONKEL20GB	•	•	2	2	2
	UNI-SONEL hanging straps	WAPZSZE1				1	1
	Label Roll – Black on White for D2 printer (SATO)	WANAKD2	•	•	•	•	•
	Ribbon for D2 printer (SATO)	WANAKD2BAR	•	•	•	•	•
	Kelvin vice with cables	WAZACKEL1	•	•	•	•	•
	NiMH battery 4.8 V 3.2 Ah for MMR-620/630	WAAKU03				1	1
	Li-Ion battery Li-Ion 7.2 V	WAAKU27			1		
	PC software: Sonel Reader	WAPROREADER	•	•	•	•	•




## Location of hidden infrastructure and faults



LKZ-2500  
LKZ-2000

LKZ-720

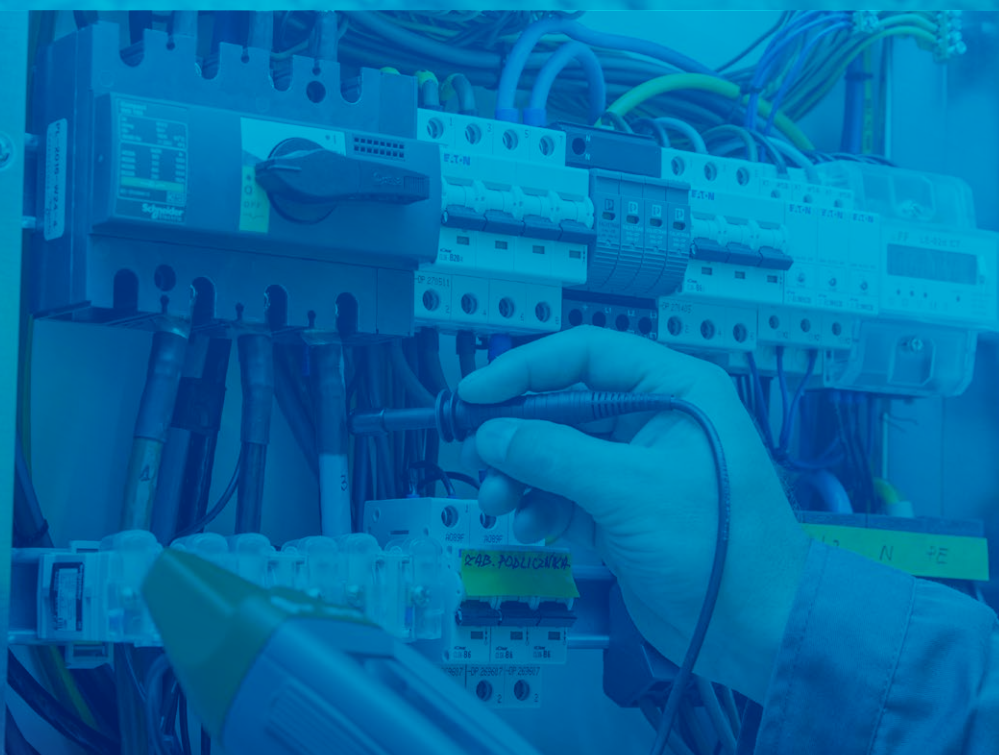

TDR-420  
TDR-410





# Detecting cables and underground infrastructures



Earthworks that include various types of excavation, but also installation of sewer and water pipes or cables - are associated with a **high risk of damage to underground systems**, which could lead to a dangerous accident. European Union law requires from the contractor of such works to ensure safety to employees, third parties and private property. In order to reduce the risk of accidents, a number of activities are carried out, including the mandatory detection of existing underground installations and systems. The contractors are never absolutely sure whether all underground utilities are shown on the maps. Therefore, in order to identify all potentially hazardous installations and systems, **additional checks are necessary**, which may be performed with cable locators.

LKZ-2500 is a set for locating wires and pipes, **which precisely determine the depth and direction** of conductive systems (power and telecommunications cables, metal pipes) and with additional probes it is able to detect plastic and concrete pipes. Earthworks are carried out in difficult conditions (moisture, dirt), so both devices meet the requirements of IP65, while the transmitter with closed cover provides ingress protection of IP67.

Location and tracking underground infrastructure elements is performed in a wide range of conditions. LKZ-2500 can operate in several different modes, adapted to different situations:

**Power** - used to locate electric cables. It is a **passive mode**, where the transmitter is not required: the signal is generated by the live cable itself.

**Radio** - used to locate metal objects (pipes, reinforcement elements), which re-emit radio signals. It is also a **passive method**: the signal is present in the tested object, which re-emits radio waves.


**8 kHz** - used for precise location of a particular type of systems (cables, pipes, etc.). The frequency of the generated signal (8 kHz) has better range than 33 kHz and lower tendency to transfer the signal to other objects. This is an active method, because it requires the use of a signal generator.

**32 kHz** - used for location of a particular type of systems (cables, pipes, etc.). This frequency is most often used to locate underground installations. It ensures the highest efficiency, but it has a greater tendency to transfer the signal to other systems/installations. This method also requires the use of a signal generator (**active method**).


LKN-2500 generator (transmitter) generates a signal which is tracked in the detected system. Depending on the situation, in active modes, the transmitter may be connected as shown in one of the following images.



Inductive method

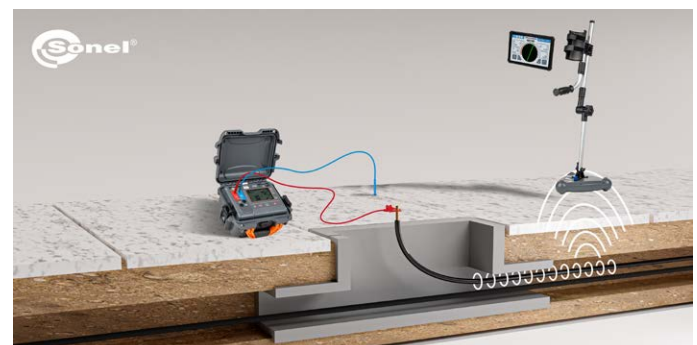



Galvanic method

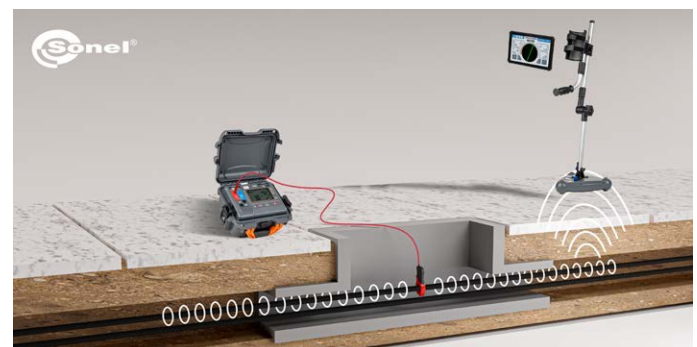

Clamp method

Additionally, LKZ-2500 set allows the user to precisely determine the depth of a particular system within 3 meters. In such detection, the device must operate in active modes of 6 kHz or 33 kHz, which use the transmitter and receiver.

In metal systems, the signal may be generated without wires by induction or by direct connection of test leads or by using transmitting clamps. In non-conductive systems, the signal may be generated by introducing a transmitting probe (in the form of a coiled cable or "floating" probe) directly to the detected system (plastic, concrete pipes etc.). In addition to determining the direction and depth of pipes, the user may also locate their blockages by using additional probes.

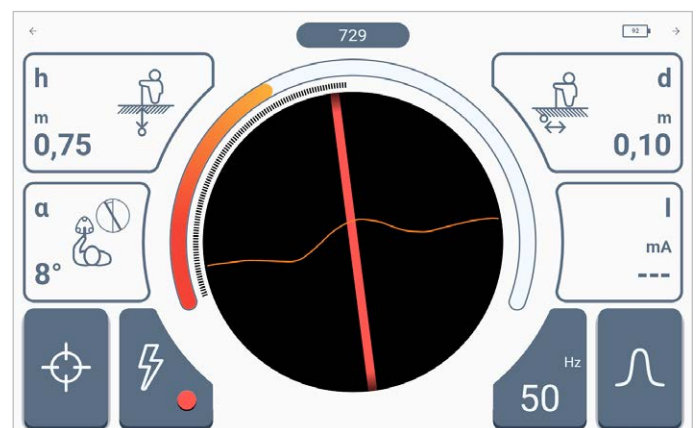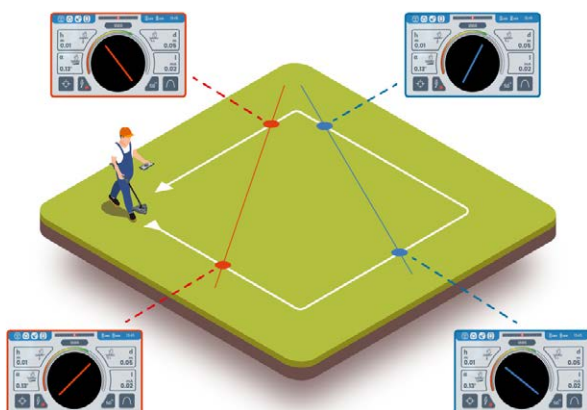

## SONEL LKZ-2500



### Choose the best set for your needs

#### LKZ-2500

Location set with transmitter, detector, control panel and long handle

index: WMGBLKZ2500

#### LKZ-2500 Start

Location set with transmitter, detector and long handle

index: WMGBLKZ2500START

#### LKZ-2500 Lite

Location set with transmitter, detector and short handle


index: WMGBLKZ2500LITE

#### LKD-2500

Location set with detector and short handle

index: WMGBLKD2500

#### LKN-2500 transmitter



#### LKD-2500 detector



The LKZ locator set consists of a LKN transmitter and LKD detector. It allows for location, identification and tracking of the route of objects buried in the ground. It allows to trace:

- » power cords and cables, control cables, telecommunications cables,
- » underground elements of lightning protection systems, cathodic protection systems,
- » water and sewage systems,
- » fuel transmission systems (pipelines, gas pipelines)
- » heating systems and pre-insulated pipes.

The sets of LKZ series are an invaluable support in earthworks carried out for various industries, including energy, installation, construction, railway, telecommunications, water and sanitary, heating, geodetic and many others.

**LKN-2500 transmitter** injects a locating signal into an underground object. **LKD-2500 detector** placed along the object traces this signal along the object. The information about position of the traced object is displayed on the **Sonei LKZ Mobile app** which is connected with the detector. Determination of the object's route is possible based on observation of compass readings and the level of the detected signal.

The system has the ability to trace cables and record routes via the mobile application. Such files can be exported and shared with other users – including those who do not have the LKN-2500 / LKD-2500 device.

The system is capable of operating in passive mode (without the use of the LKN-2500 transmitter) and active mode (with the use of the LKN-2500 transmitter). The active mode allows to introduce the signal in three different methods:

- » **galvanic** – injects tracing signal into the object directly, through crocodile clips and test leads,
- » **clamp** – injects tracing signal into the object through an inductive clamp,
- » **inductive** – injects tracing signal into the object inductively, using the instrument's internal antenna.

#### LKN-2500 transmitter:

- » ingress protection ..... IP67
- » power supply ..... Li-ion 7.2 V 9.8 Ah rechargeable battery
- » operating temperature ..... -10...+50°C
- » dimensions ..... 318 x 257 x 152 mm
- » weight ..... 3.4 kg

#### LKD-2500 detector:

- » ingress protection ..... IP65
- » power supply ..... Li-ion 3.6 V 6.7 Ah rechargeable battery
- » operating temperature ..... -10...+50°C
- » dimensions ..... 290 x 275 x 100 mm
- » weight ..... 1.2 kg

#### LKN-2500 transmitter

- » Operation in direct galvanic or inductive connection mode – internal transmitting antenna
- » Compatible with transmitting clamps
- » Rugged housing

#### LKD-2500 detector

- » **Active mode**
  - work with LKN-2500 transmitter at the frequencies of 8 kHz, 32 kHz (Signal mode)
- » **Passive mode** – work at the frequencies of:
  - 50 Hz, 60 Hz (Power mode)
  - 2...65 kHz (Radio mode)




## SONEL LKZ MOBILE

index: WAPROLKZMOBILE

The application works with Sonei LKD-2500 detector. It enables tracing of objects, recording of routes in the memory of the mobile device along with GPS positions of waypoints and additional readings.

The application additionally enables:

- » live positioning preview,
- » measuring the distance to a specific waypoint,
- » export of routes to other mobile devices,
- » reading routes from the mobile device's memory,
- » preview of all recorded parameters,
- » merging routes,
- » adding notes to routes and measurement points.

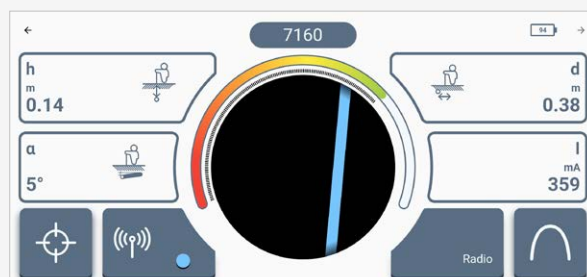



Choose the best set for your needs

transmitter

detector

control panel

long handle

short handle

## LKZ-2500

includes transmitter, detector, control panel and long handle



## LKZ-2500 Start

includes transmitter, detector and long handle




## LKZ-2500 Lite

includes transmitter, detector and short handle



## LKD-2500

includes detector and short handle

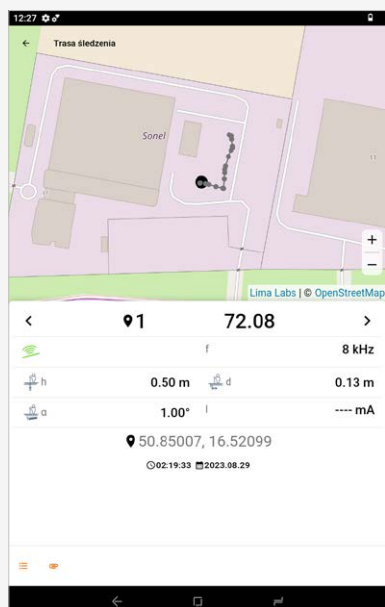

### Standard accessories:

		LKZ-2500	LKZ-2500 Start	LKZ-2500 Lite	LKD-2500
		WMGBLKZ2500	WMGBLKZ2500START	WMGBLKZ2500LITE	WMGBLKD2500
LKN-2500 transmitter	WMGBLKN2500	✓	✓	✓	
LKD-2500 detector	WMGBLKD2500	✓	✓	✓	✓
Control panel	WAPOZTAB8	✓			
2x test lead 5 m, red, 1 kV (banana plugs)	WAPRZ005REBB	✓	✓	✓	
Test lead 5 m, blue, 1 kV (banana plugs)	WAPRZ005BUBB	✓	✓	✓	
3x crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	✓	✓	✓	
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	✓	✓	✓	
2x earth contact test probe (rod), 30 cm	WASONG30	✓	✓	✓	
Z7 power supply	WAZASZ7	✓	✓	✓	
Meter power adapter (type Z32)	WAZASZ32	✓	✓	✓	✓
L10 carrying case	WAFUTL10			✓	✓
XL-1 carrying case	WAFUTXL1	✓	✓		
Shoulder harness, design 1	WAPOZSZE7	✓	✓		
Short handle	WAPOZUCH14			✓	✓
Long handle	WAPOZUCH15	✓	✓		
Holder for control panel	WAPOZUCH16	✓	✓		
Declaration of verification		✓	✓	✓	✓

## SONEL LKZ-2000

index: WMGBLKZ2000



The diversity and concentration of underground infrastructure are still growing. Identifying underground systems was never as difficult and important a task as it is today. Location allows us to infer the actual position of an underground system and determine the proper location for current works, as well as to prevent accidents caused by damage to the underground objects.

The Sonel LKZ-2000 locator set has a series of unique functions that assist in selecting the appropriate location mode. The most important feature distinguishing this instrument from the competition is its capability of analyzing disturbances present at the place where location is performed, facilitating selection of the best frequency under difficult conditions. This makes it possible to avoid selection of an ineffective frequency, significantly accelerating and facilitating work with the locator.

### The best system under the most demanding conditions:

- » power engineering
- » construction
- » railway
- » telecommunications
- » refineries
- » sanitary infrastructure
- » heat distribution networks
- » transmission pipelines

#### Standard accessories:

LKN-2000 transmitter	WMGBLKN2000
LKO-2000 receiver	WMGBLK02000
L9 carrying case	WAFUTL9
12x 1.5 V battery	
Declaration of verification	

#### LKN-2000 transmitter:

- » ingress protection ..... IP65
- » power supply ..... 10x LR20 battery  
Li-Ion rechargeable battery pack
- » operating temperature ..... -20...+50°C
- » dimensions ..... 255 x 190 x 305 mm
- » weight ..... ca. 3.5 kg

#### LKO-2000 receiver:

- » ingress protection ..... IP65
- » power supply ..... 2x LR20 battery
- » operating temperature ..... -20...+50°C
- » dimensions ..... 700 x 325 x 122 mm
- » weight ..... ca. 2.2 kg



LKO-2000 enables remote control and configuration of the transmitter.

#### LKN-2000 transmitter

- » **Operating frequencies:** 512 Hz, 3140 Hz, 8192 Hz, 32768 Hz, 83.1 kHz, 200 kHz
- » **Output power control:** 5 levels
- » **Power in induction mode (max):** 3 W
- » **Power for galvanic connection (max):** 12 W (for impedance of connected object: 100 Ω)
- » **Batteries:** up to 100 hours (level 2 output power at 20°C)
- » **Auto-OFF:** Capability of selecting auto-OFF time, after 1, 2, 3, 4, 5, 6, 7, 8 hours

#### LKO-2000 receiver

- » **Mode / Frequency:**
  - POWER passive mode: 50 Hz, 100 Hz, 450 Hz / 60 Hz, 120 Hz, 540 Hz
  - RADIO passive mode: 15 kHz to 60 kHz
  - Active mode (with transmitter): 512 Hz, 3140 Hz, 8192 Hz, 32768 Hz, 83.1 kHz
- » **Antenna configuration:** Single peak value, double peak value, neutral point, full field
- » **Depth measurement range:**
  - POWER mode up to 3 m
  - RADIO mode up to 2 m
  - modes with active transmitter up to 4.6 m
  - probe mode up to 6 m
- » **Accuracy of measurement (error):**
  - 5% depth in linear or probe mode (from 0.2 m to 4.6 m)
  - 10% depth in probe mode (from 4.6 m to 6 m)
- » **Bluetooth:** for remote transmitter control
- » **Operating time with battery power for LKO:** up to 60 hours (at 20°C)
- » **Auto-OFF:** Capability of selecting auto-OFF time after 5, 10, 20 or 30 minutes




Using the A-frame, a cable earth fault can be located.



# Detecting cables and wires

Works on detecting underground cables and wires and their routes are always challenging and quite difficult for people performing this task. Despite **good practice and guidelines included in standards and recommendations, which define places for routing cables in the walls, contractors often perform their tasks inconsistently and negligently**. In result electric wires are found often in at least expected places. Naturally, floors and ceilings are also areas used for installing cables. Therefore, **electrical systems can be found in many locations**, causing problems during renovation and finishing works. Performing works without prior routing of cables and wires may cause their damage by drilling, puncture, or short-circuit by a metal screw.

SONEL S.A., due to its continuous contact with installers and contractors, thoroughly recognizes the problems faced by specialists repairing electrical installations. This resulted in designing and producing **LKZ-720** a locator of wires and pipes, intended mainly for **detecting cables in buildings with various construction environments (concrete, brick, wood)**. Apart from tracking cables in ceilings, walls and floors, detecting interrupted and shorted circuits, LKZ-720 has the ability to detect 50/60 Hz electric field (non-contact voltage tester) and identify system safety devices such as circuit breakers, differential switches. The device is equipped with a special 3D spatial antenna, which significantly facilitates detection and provides transfer of many useful information.

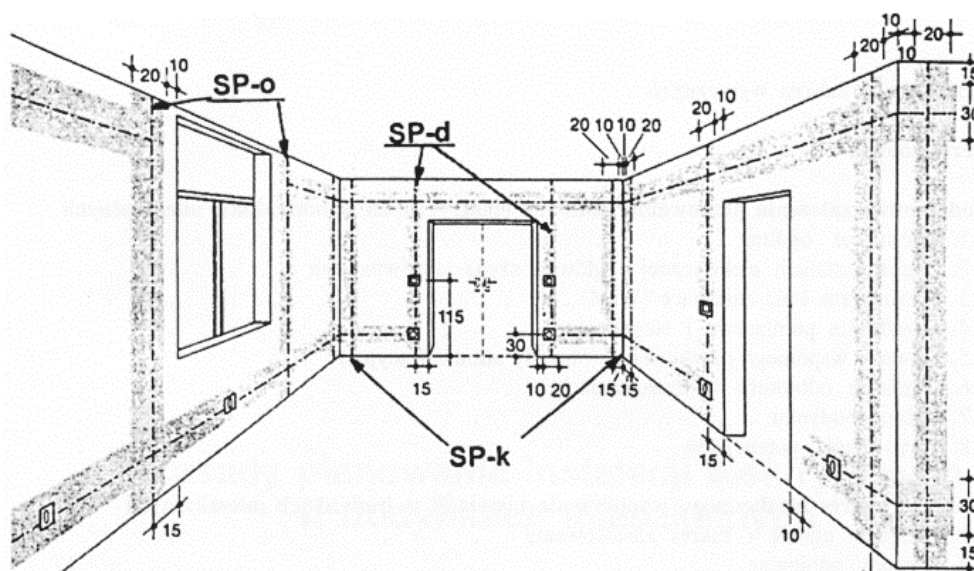

Recommended areas for laying cables in residential premises...



... and cables immediately before installation


Another problem often encountered after completed finishing works is **the difficulty in finding termination of cables and pipes, which disappeared from eyesight after plastering**. Inventorying old systems (often installed in a surprising way), identification of safety devices, finding short-circuits and interrupted electrical circuits are difficult tasks, even for experienced professionals.

In order to determine the routing of wires and to locate their damages, the device uses physical phenomena, especially the propagation of the electromagnetic field. After connecting an open circuit to the transmitter, which emits a modulated signal of AC voltage, this circuit acts as an antenna emitting an electric field. When the transmitter is connected to a closed circuit, or a circuit under voltage, a magnetic field will be generated. The receiver is designed to present the received signal strength in numerical and graphical form. Changes in presented indications allow user **determine the position of an object** that emits electromagnetic field.

Due to its features, **LKZ-720 set** (LKN-720 transmitter and LKO-720 receiver) enables user to easily, fast and precisely locate cable and wire routes, as well as their potential defects. Definitely, the easiest method is to use a two-step technique:

- » quickly and roughly locate the searched object using the 2D method, and then
- » use the 3D method to precisely determine the position of the object or location of the defect.

This is **particularly useful**, when dealing with the **effect of work that does not match the documentation of the system**. During the tracking process, the receiver informs the user about the direction from which the signal is transmitted, i.e. the place of connecting the transmitter. In addition, the indicators on the display show the direction and position of the localized conductor in relation to the receiver. With this information, determining the location is quick, efficient and very intuitive.

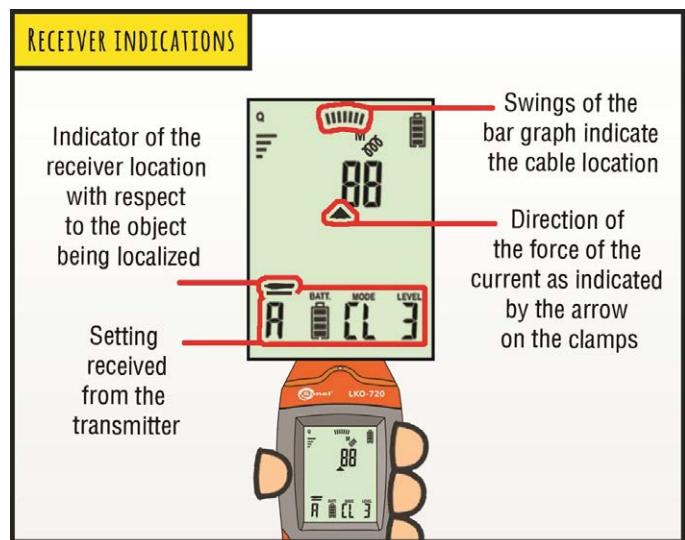

Manual in images



Video tutorials



See the manual in images and video tutorials that are available on the product website and on YouTube.





## SONEL LKZ-720 / LKZ-720 KIT

index: WMGBLKZ720 / WMGBLKZ720KIT



### LKN-720 transmitter:

- » type of insulation ..... double, as per EN 61010-1
- » measurement category ..... CAT III 600 V according to EN 61010-1
- » ingress protection ..... IP67
- » power supply ..... 4x 1.5 AA alkaline battery or 4x 1.2 Ni-MH rechargeable battery
- » maximum operating voltage ..... 500 V (RMS)
- » operating temperature ..... -10...+50°C
- » dimensions ..... 221 x 102 x 62 mm
- » weight ..... ca. 0.7 kg

### LKO-720 receiver:

- » ingress protection ..... IP40
- » maximum depth of the analysed object ("I" mode) ..... 2 m
- » maximum range of contactless neon probe ..... 50 cm (in air)  
5 cm (in concrete)
- » power supply ..... 9 V 6LR61 alkaline battery
- » operating temperature ..... -10...+50°C
- » dimensions ..... 245 x 77 x 52 mm
- » weight ..... ca. 0.4 kg

### Standard accessories:

		LKZ-720	LKZ-720 KIT	LKO-720	LKN-720	LKN-720 KIT
		WMGBLKZ720	WMGBLKZ720KIT	WMGBLK0720	WMGBLK720	WMGBLK720KIT
LKN-720 transmitter	WMGBLK720	1	4		1	3
LKN-720 receiver	WMGBLK0720	1	1	1		
L2 carrying case	WAFUTL2		1			1
M6 carrying case	WAFUTM6	1		1		
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB	1	4		1	3
Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB	1	4		1	3
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	1	5		1	4
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	1	4		1	3
Pin probe, red 1 kV (banana socket)	WASONRE0GB1	1	4		1	3
Pin probe, blue 1 kV (banana socket)	WASONBU0GB1	1	4		1	3
Test lead 20 m, red, 1 kV (on a reel, banana plugs)	WAPRZ020REBBSZ	1	1		1	
Earth contact test probe (rod), 25 cm	WASONG25	1	2		1	1
Non-contact probe	WASONBDOT	1	1	1		
Mini-USB cable	WAPRZUSBMNIB5	1	1	1		
M1 hanging straps	WAPZSZSE4	1	1		1	1
1.5 V battery		4	16		4	12
9 V battery		1	1	1		
Declaration of verification		1	1	1	1	1

### Description

The Sonei LKZ-720 cable and wire locator is a device consisting of the LKN-720 transmitter and the LKO-720 receiver. This instrument is dedicated to finding cables and other underground infrastructures. The LKZ-720 allows the location of both metallic objects (cables) and non-conductive objects (PVC pipes, concrete, etc.). The locator is mainly dedicated to use in the energy and installation industry, among others.

### Features

- » Detection of wires and cables (live or not).
- » Tracing underground cables.
- » Tracing conductive water and heating pipelines.
- » Flow and accurate locating the object.
- » Phase detection mode.
- » Operation in wide range of rated voltage, up to 500 V RMS.
- » Five modes of wire tracer operation: voltage, current, current-voltage, power and clamp.
- » Additional accessories enable precise localization - such as contact or non-contact probes and measurement clamp.

### Special features


#### LKO-720

- » Receiver operation with max. 4 transmitters at the same time to locate interruptions or distinguish wires.
- » Receiving status information from the LKN-720 transmitter.
- » The function 3D - detecting the direction of current.
- » A LED torch.
- » Headphone socket.
- » Software upgrade via USB.
- » Screen backlight for work in dark.

#### LKN-720

- » 4 codes of the transmitted signal.
- » Transmission of information about the transmitter settings and battery charge level.
- » Measurement of voltage at the object to 500 V RMS.
- » Three levels of amplification.
- » Automatic or manual selection of operation modes.
- » Screen backlight for work in dark.

See the video tutorials available on YouTube.

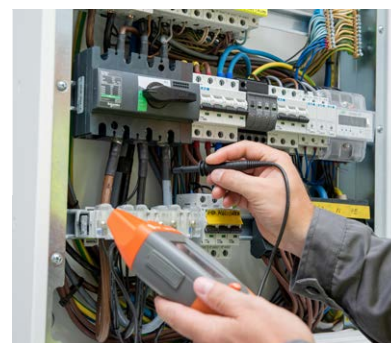

# LKZ

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

















Photo	Name	Index	LKZ-2500	LKZ-2500 Start	LKZ-2500 Lite	LKZ-2000	LKZ-720 KIT	LKZ-720
	LKN-720 transmitter	WMGBLKN720					4	1
	LKO-720 receiver	WMGBLKO720					1	1
	LKN-2000 transmitter	WMGBLKN2000				1		
	LKO-2000 receiver	WMGBLKO2000				1		
	LKN-2500 transmitter	WMGBLKN2500	1	1	1			
	LKD-2500 detector	WMGBLKD2500	1	1	1			
	Control panel	WAPQZTAB08	1	•	•			
	A-frame	WAADALKZRA				•		
	C-3 clamp adapter	WAADALKOC8					•	•
	Magnetic voltage adapter, black	WAADAUMAGKBL					•	•
	Magnetic voltage adapter, blue	WAADAUMAGKBU					•	•
	N-1 transmitting clamp (Ø52 mm)	WACEGN1BB	•	•	•		•	•
	N-3 transmitting clamp (Ø125 mm)	WACEGN3				•		
	N-4 transmitting clamp (Ø110 mm)	WACEGN4	•	•	•			
	N-5 transmitting clamp (Ø125 mm)	WACEGN5	•	•	•			
	C-8 clamp probe (Ø52 mm)	WASONCEGC8					•	•

Photo	Name	Index	LKZ-2500	LKZ-2500 Start	LKZ-2500 Lite	LKZ-2000	LKZ-720 KIT	LKZ-720
	L2 carrying case	WAFUTL2					1	
	L9 carrying case	WAFUTL9				1		
	L10 carrying case	WAFUTL10			1			
	M6 carrying case	WAFUTM6						1
	XL1 carrying case	WAFUTXL1	1	1	•			
	Li-Ion battery 3.6 V 4.5 Ah	WAAKU14				•		
	Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	3	3	3		5	1
	Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	1	1	1		4	1
	Test lead 2,0 m black CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BLBBF10					•	•
	Test lead 2,0 m blue CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BUBBF10					•	•
	Test lead 2,0 m green CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002GRBBF10					•	•
	Test lead 2,0 m red CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002REBBF10					•	•
	Test lead 2,0 m yellow CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002YEBBF10					•	•
	Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB					4	1
	Test lead 1.2 m, blue, 1 kV (banana plugs)	WAPRZ1X2BUBB					4	1
	Double-wire test lead 2 m, for N-1 clamp (banana plugs)	WAPRZ002DZBB					•	•

## LKZ

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	LKZ-2500	LKZ-2500 Start	LKZ-2500 Lite	LKZ-2000	LKZ-720 KIT	LKZ-720
	Test lead 5 m, red, 1 kV (banana plugs)	WAPRZ005REBB	2	2	2			
	Test lead 5 m, blue, 1 kV (banana plugs)	WAPRZ005BUBB	1	1	1			
	Test lead 20 m, red, 1 kV (on a reel, banana plugs)	WAPRZ020REBBSZ					1	1
	PN-50 wire to locate non-metallic installations 50 m	WAPRZPN50	•	•	•	•		
	PN-80 wire to locate non-metallic installations 80 m	WAPRZPN80	•	•	•	•		
	USB cable MINI-B 5	WAPRZUSBMNIB5					1	1
	Non-contact probe	WASONBDOT					1	1
	BIK probe for wireless identification of cables	WASONBIK				•		
	Earth contact test probe (rod), 25 cm	WASONG25					2	1
	Earth contact test probe (rod), 30 cm	WASONG30	2	2	2			
	Contact probe	WASONDOT					•	•
	NAD-1 Transmission probe	WASONNAD1				•		
	Pin probe, black 11 kV (banana socket)	WASONBLOGB11					•	•
	Pin probe, red 1 kV (banana socket)	WASONREOGB1					4	1
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1					4	1
	M1 hanging hook straps	WAPOZUCH1					•	•

Photo	Name	Index	LKZ-2500	LKZ-2500 Start	LKZ-2500 Lite	LKZ-2000	LKZ-720 KIT	LKZ-720
	Magnetic hanging strap	WAPOZUCH6					•	•
	Short handle	WAPOZUCH14	•	•	1			
	Long handle	WAPOZUCH15	1	1	•			
	Holder for control panel	WAPOZUCH16	1	1				
	M1 hanging straps	WAPOZSZE4					1	1
	Shoulder harness, design 1	WAPOZSZE7	1	1				
	Z7 power supply	WAZASZ7	1	1	1			
	Z32 power supply	WAZASZ32	1	1	1			



## SONEL TDR-420 / TDR-410

index: WMGBTDR420 / WMGBTDR410



IP67

IP54

### Diagnose faults with instruments from the TDR series

- » fault location in power and telecommunication cables
- » **TDR-420** | two independent cursors to indicate two fault locations and the distance between them
- » **TDR-420** | trace hold and compare feature allows displaying and comparing two traces
- » fault location in coaxial cables
- » fault location in infrastructure cables
- » detection of breaks, short-circuits, damage caused by moisture and other changes in cable impedance
- » graphic presentation of cable faults with an indication of the distance to the fault on the display

### Application

TDR-410 and TDR-420 time-domain reflectometers are designed for faults locating in metal wires. These products are designed for electrical wholesalers and cable dealers, electrical installation companies, maintenance personnel at manufacturing plants and building personnel. These devices meet the expectations of all those who have to accurately locate a fault and wire end in either power or telecommunications cables.

### Device capabilities

SONEL reflectometers are distinguished for their long operating range (**up to 6,000 m for TDR-420**), very low margin of error in measurement (in the order of 1%) and the ability to adjust both the velocity of propagation and the impedance of the cable which is under investigation. By using **two cursors** there should be no problem with determining both the distance to two faults and the distance between them.

### Easy readout

The **TDR-420** reflectometer is equipped with a readable **colour display** that, due to its 320 x 240 pixel resolution, allows the fault location to be indicated even more accurately.

### Integrated Help


In the **TDR-420** device a **handy help** function has been added to facilitate the interpretation of the result obtained during measurement. Thanks to this function, a user can quickly determine the type of anomaly that is present in the cable segment which is being examined, by comparing the displayed reflectogram with typical fault shapes.

### Durable and practical casing

In response to the customers needs the **new model of TDR-420** has been designed to operate in difficult environmental conditions. A unique **casing with the IP67 ingress protection rating** ensures that the device is both waterproof and dustproof. An additional advantage is the elastomer coating of the casing that prevents the device from slipping out of the hands and provides protection if accidentally dropped.

### Standard accessories:

		TDR-420	TDR-410
Double-wire test lead 0.6 m	WAPRZ0X6DZBB	✓	✓
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	✓	✓
Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01	✓	✓
M6 carrying case	WAFUTM6	✓	
M13 carrying case	WAFUTM13		✓
M1 hanging straps	WAP0ZSZE4	✓	
4x alkaline 1.5 V AA battery		✓	✓
Declaration of verification		✓	✓

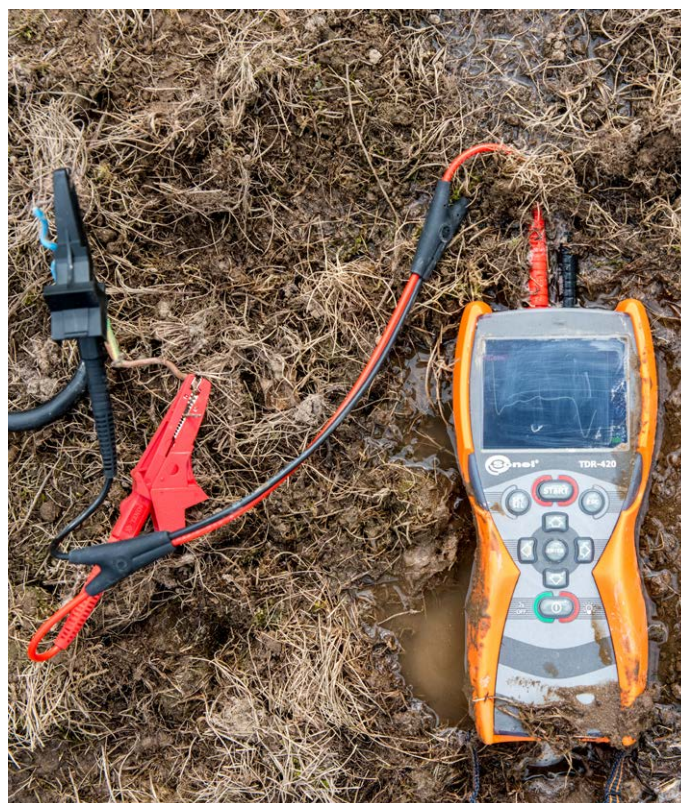

Parameters	TDR-420	TDR-410
	Advanced reflectometric measurements in all fields	Basic cable faults measurements
measuring ranges	7 m, 15 m, 30 m, 60 m, 120 m, 250 m, 500 m, 1 km, 2 km, 3 km, <b>6 km</b> 20, 45, 90, 180, 360, 750, 1500, 3000, 6000, 10000, 20000 [ft]	7 m, 15 m, 30 m, 60 m, 120 m, 250 m, 500 m, 1 km, 2 km, 3 km, 4 km 20, 45, 90, 180, 360, 750, 1500, 3000, 6000, 10000, 14000 [ft]
accuracy	1% of selected range	
resolution	approx. 1% of range	
minimum cable length	4 m	
velocity of propagation	within 10...99% or 15...148.5 m/μs	within 1...99% or 1...148 m/μs
output impulse	5 V <sub>pp</sub> for an open circuit	
output impedance	25, 50, 75, 100, <b>125, 200</b> Ω	25, 50, 75, 100 Ω
impulse width	3 ns...3 μs (depending on the range)	
scanning type	<b>up to 3 scans/s</b> or a single scan (ONCE mode)	2 scans/s or a single scan
tone generator	810 – 1100 Hz	
operating time on a full battery	up to 8 hours of continuous scanning	<b>up to 30 hours of continuous scanning</b>
power supply	4 x alkaline batteries 1.5 V AA type or <b>4 x NiMH AA rechargeable batteries</b>	4 x alkaline batteries 1.5 V AA type
auto-off function	1, 3, 5, 10, 15 minutes or deactivated	1, 2, 3, 5 minutes or deactivated
display	<b>colour 3.5" LCD TFT, 320 x 240 pixels</b>	graphical, backlit, 128 x 64 pixels
overvoltage protection	400 V DC / 250 V AC	
operating temperature	-20...+70°C	-10...+50°C
storage temperature	-30...+80°C	-20...+70°C
dimensions	220 x 102 x 61 mm	<b>165 x 90 x 37 mm</b>
weight	487 g	350 g
electromagnetic compatibility standards (EMC)	EN 61326-1	
ingress protection	<b>IP67</b>	IP54



## TDR

### Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories

Photo	Name	Index	TDR-420	TDR-410
	Magnetic adapter, black	WAADAUMAGKBL	•	•
	Magnetic adapter, blue	WAADAUMAGKBU	•	•
	Voltage adapter with M4 / M6 thread, black	WAADAM4M6BL	•	•
	Voltage adapter with M4 / M6 thread, blue	WAADAM4M6BU	•	•
	Crocodile clip, black 1 kV 20 A	WAKROBL20K01	1	1
	Crocodile clip, red 1 kV 20 A	WAKRORE20K02	1	1
	Test lead 2,0 m black CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BLBBF10	•	•
	Test lead 2,0 m blue CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BUBBF10	•	•
	Test lead 2,0 m red CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002REBBF10	•	•
	Double-wire test lead 0.6 m	WAPRZ0X6DZBB	1	1
	M1 hanging straps	WAP0ZSZE4	1	
	Magnetic hanging strap	WAP0ZUCH6	•	
	M6 carrying case	WAFUTM6	1	
	M13 carrying case	WAFUTM13		1



# Illuminance measurements

Our perceptive capability and psychophysical condition depend to a very large extent on the surrounding environment. Light stimuli are decisive factors in the psychological comfort. Prolonged exposure to artificial light may accelerate fatigue and contribute to eyesight defects and other diseases. Negative **impact of improper lighting** on people is particularly important in terms of safety and **work efficiency**. The perception of light stimuli, although dependent on the individual characteristics of a person, is in general similar for majority of people. Therefore, regulations have been defined to define values and types of lighting in places where people live and work. The light visible to humans is an electromagnetic wave with a length from approx. 380 nm to approx. 780 nm. The sensitivity of a human eye is not the same in all conditions - it results from its structure and location of receptors, as well as from the nature of the light. In daylight conditions the eye is most sensitive to green colour, whereas at night or in poor lighting, the eye sensitivity shifts to blue colour - this is why we have a subjective impression that at night everything is grey.

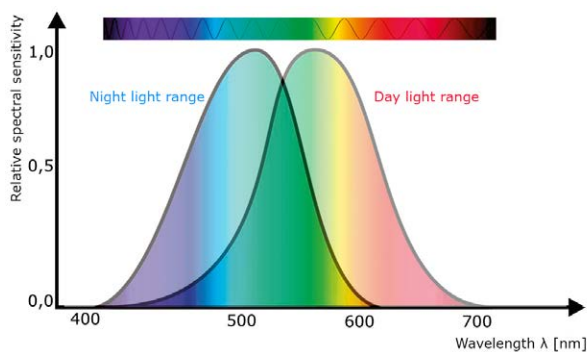


Fig. 1. Visible range of electromagnetic waves during the day and night

Despite the adaptability of the eye to changing light intensity, the measurements require to set the measuring device to have a sensitivity similar to an eye adapted to bright daylight. Spectral curve that corresponds to this sensitivity is called the photopic curve  $V(\lambda)$ . It is useful to calculate photometric values. In determining the criteria for proper lighting parameters, consider the following:

- » recommendations of the International Commission on Illumination (CIE) (determination of optimal conditions for the illumination of rooms, depending on their use)
- » local regulations (i.e. GB 50034, JIES-008, CIE S 008/E-2001, SNiP 23-05-95, AS 1680.1-2006).

For testing workplace lighting, it is recommended to observe guidelines defined in **binding standard EN 12464**. When discussing illuminance measurements, it is useful to define the illuminance. It is the ratio of luminous flux on a specified area and the surface of this area. The unit of illuminance is lux (lx) [ $\text{lm}/\text{m}^2$ ]. In addition, CIE provides recommended **illuminance uniformity  $E_m$**  in the field of view, i.e. the way of lighting the workplace. High irregularity of illumination (e.g. exposed light sources in the field of view) creates a risk of glare which may reduce the ability to recognize details or cause a discomfort. In addition, due to the time needed for eyes to adapt to changes, the illumination uniformity should be maintained over time. Therefore, the level of ripple is important and this relates to flicker.

**The light colour** is another factor that has a significant impact on the well-being of people present in the room. For a man the most optimal lighting has the spectral composition most similar to daylight. Light sources are classified according to the colour temperature into warm, cool and neutral light. The colour temperature may be determined based on **colour rendering index Ra**, which reflects the difference between the colour of object illuminated by natural light and the object illuminated by tested light. Light sources with relatively high Ra index include standard bulbs, halogen bulbs or LEDs. Sources with Ra below 70 include sodium and mercury lamps. Measurements of parameters that help to assess lighting conditions should be carried out during the acceptance of new lighting devices and during the modernization of existing devices or periodically every 5 years. **It is recommended to carry out the tests at least every two years.** The tests shall be carried out:

- » after dark or with curtains drawn
- » in operating conditions - the test area shall not be specially prepared (creating unrealistic conditions) for the tests.

Luminaires with discharge lamps must be switched on at least 30 minutes before testing. Other types of light sources such as halogen bulbs or LEDs, may be examined directly after switching on. Discharge lamps must not be new; they should operate at least 100 hours before measurements; in case light bulbs and halogen lighting this operation period is only one hour. The person performing the measurements can not affect the results. Therefore, it is advisable to wear dark clothing, and the distance from the measuring device should be as large as possible. Measurements

should be performed in the plane of the task (e.g. desk surface) with the photometer head set in parallel and directly on the test surface.

In **EN 12464-1** standard, the term **illuminance of the immediate surrounding area** appears. It depends on illuminance in the task area and it shall provide an even distribution of luminance in the field of view. This standard recommends minimum dimensions of the task area and related dimensions of the immediate surrounding area (a strip with a width of at least 0.5 m around the task area) and a background area (a strip with a width of at least 3 m adjacent to immediate surrounding area).

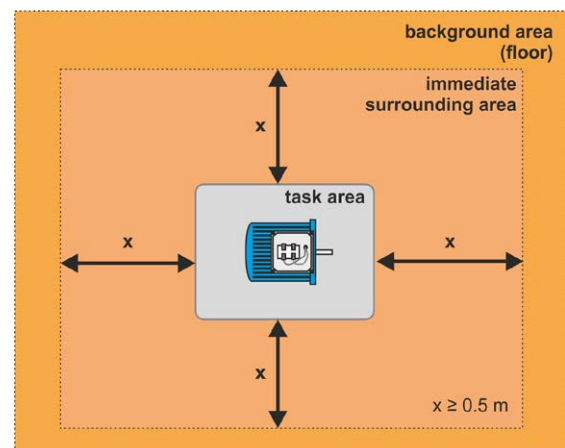


Fig. 2. Visual task, immediate surrounding area and background area

In order to determine the measuring points of all three areas, create grid with a mesh of approximately square shape. The ratio of length to width of the mesh should be between 0.5 and 2. The measurement points should be located inside the mesh of the lighting grid. The maximum grid size shall be:

$$p = 0,2 \cdot 5^{\log_{10} d}$$

where:

p - maximum dimension of the grid [m],

d - longer dimension of the calculated area [m].

Basing on the measurements, **lighting uniformity  $U_0$**  may be calculated for a given workplace.

**To measure lighting in interiors with daylight**, carry out the measurements that determine the daylight index. For this purpose, use two luxmeters to perform measurements simultaneously outside and inside the rooms lit via windows or skylights. On the other hand, when **measuring emergency lighting** the illuminance values are very low. The requirements in this matter are defined in standard **EN 1838:2013**. It should be mentioned that for escape routes with a width of 2 meters, the minimum value of illuminance measured at the floor is **1 lux**, which affects the selection of an appropriate measuring device. In recent years, LED illumination sources become more and more popular. Their measurements are currently based on the same requirements as other types of light sources. In case of **measurements on white LED light**, consider the guidelines of CIE concerning parameter  $f_1$ , i.e. the size of mismatch between luxmeter sensitivity and curve  $V(\lambda)$ . The Commission recommends the use of luxmeter with  $f_1$  **not exceeding 3%**.

**Sonell LXP-10A light meter of Class A meets this condition.** In case of light meters LXP-10B and LXP-2 of Class B, having the declared error value of spectral correction  $f_1 < 6\%$ , the error value  $f_1$  must be also taken into account, which results from differences in spectral distribution of the measured and calibration light source. The illuminance measurement formula requires taking into account the correction factors for the LED light. As in luxmeters of Class A and B, the correction factors  $k$  take values close to 1, they do not have a significant impact on the measured illuminance value.

When selecting the measuring instrument, **attention should be paid to a valid calibration certificate, which confirms its efficiency and the fact that it meets declared levels of basic and spectral uncertainty. The photoelectric cell, which is used as a sensor, is ageing over time**, so it should be subject to metrological periodic checks.



## SONEL LXP-10A / LXP-10B / LXP-2

index: WMGBLXP10A / WMGBLXP10B / WMGBLXP2



### LXP-10A

Device of the highest class A according to DIN 5032-7 thanks to cooperation with LP-10A measuring probe. LXP-10A has all advantages that can be found in LXP-10B. Furthermore, it allows to make the most accurate measurements in industrial zones and public facilities. In addition, the instrument has the ability to wirelessly send data to Sonel Reader PC software.

### LXP-10B

The model allows, among other things, to verify the illuminance values at workplaces and in areas where emergency lighting fixtures are used. It works with LP-10B measuring probe (class B according to DIN 5032-7). The device has internal memory of 999 measurements and additional logger for recording data with a selectable sampling rate.

### LXP-2

Model for everyone who makes basic lighting measurements of indoor and outdoor workplaces. The device works with LP-1 measuring probe (class B according to DIN 5032-7) which allows to proceed with measurements in a reliable way. The non-integrated probe eliminates the influence of the user to the measurement result.

### Main features

- » measurements of all types of light - also LED lighting
- » no need to using correction factors
- » displaying results in lux and foot-candle
- » measurements of emergency lighting

### Product functions

- » data HOLD
- » PEAK HOLD
- » MAX and MIN results save
- » measurements of relative (REL) values
- » data logger with memory
- » auto power off



LXP-10B and LXP-10A enable wireless data transfer to a PC via the OR-1 adapter

### Standard accessories:

LP-1 light meter probe (miniDIN-4P) (only LXP-2)	WAADALP1
LP-10A light meter probe (miniDIN-4P) (only LXP-10A)	WAADALP10A
LP-10B light meter probe (miniDIN-4P) (only LXP-10B)	WAADALP10B
USB cable MINI-B 5	WAPRZUSBMNIB5
9 V battery	

Factory calibration certificate

### Basic technical specifications:

	LXP-10A the most recommended for professionals	LXP-10B precise measurements of workplaces	LXP-2 basic measurements of workplaces
class	A	B	B
measurement range	0.000...399.9k lx 0.000...39.99k fc	0.00...399.9k lx 0.000...39.99k fc	0.0...19.99k lx 0.00...1999 fc
resolution (lx/fc)	up to 0.001	up to 0.01 / 0.001	up to 0.1 / 0.01
accuracy	±(2% + 5 digits)	±(5% + 5 digits)	
spectral uncertainty $f_1$	±2%	±6%	
cosine matching error $f_2$	±1.6%	±3%	
number of ranges	6	5	3
sampling rate	1.3 Hz		
spectral sensitivity	CIE spectral sensitivity (CIE human eye sensitivity)		
photodetector	one silicon photodiode and spectral sensitivity filter		

### Other technical specifications:









- » memory ..... 99 results (LXP-2), 999 results (LXP-10)
- » memory of recorder ..... 16,000 results
- » communication interface ..... USB and radio link (only LXP-10B, LXP-10A)
- » display ..... 3½ digits, LCD with 40-segment bar indicator
- » power source ..... 9 V battery or 8.4 V rechargeable battery
- » exceeding of range ..... „OL“ symbol
- » operating temperature ..... 0...50°C
- » storage temperature ..... -20...+70°C
- » relative humidity ..... 0...80%
- » photodetector lead length ..... approx. 150 cm
- » photodetector dimensions ..... 115 × 60 × 20 mm
- » meter dimensions ..... 170 × 80 × 40 mm
- » weight ..... 390 g



## LXP

### Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	LXP-10A	LXP-10B	LXP-2
	LP-1 light meter probe (miniDIN-4P plug)	WAADALP1			1
	LP-10A light meter probe (miniDIN-4P plug)	WAADALP10A	1	•	
	LP-10B light meter probe (miniDIN-4P plug)	WAADALP10B	•	1	
	Light meter probe holder (stick)	WAPOZUCH9	•	•	•
	Light meter probe holder (trolley)	WAPOZUCH10	•	•	•
	LP-1 light meter probe (miniDIN-4P plug)	WAPRZUSBMNIB5	1	1	1
	OR-1 USB wireless receiver	WAADAUSBOR1	•	•	
	Free software to transfer data from meters	WAPROREADER	•	•	•



#### Light meter probe holder (stick)

index: WAPOZUCH9

The telescopic handle of the light meter probe is designed to reduce the influence of the person performing the measurement on the obtained results. The base has been specially designed for the shape of the LP-1, LP-10B and LP-10A measuring heads.



#### Light meter probe holder (trolley)

index: WAPOZUCH10

A light meter probe holder in the form of a trolley. Its task is to facilitate the measurements of the emergency lighting intensity by reducing the influence of the measurement operator on the measurement results. The base has been specially designed for the shape of the LP-1, LP-10B and LP-10A measuring heads.



A blue and white network analyzer, the PQM-750, is shown installed in a server rack. It has multiple ports and a small display screen.

**Top class of stationary mains network analyzer  
with transients capture (Class A)**

PQM-750

A white and orange network analyzer, the PQM-711, is shown with several cables connected to its ports. A hand is holding a tablet displaying a software interface, likely used for configuring or analyzing the device.


**Top class of mains network analyzer  
with transients capture (Class A)**

PQM-711

A yellow and orange network analyzer, the PQM-710, is shown with a large number of colorful cables connected to its ports. The device has a large screen and a warning symbol.

**High accuracy mains network  
analyzer (Class A)**

PQM-710

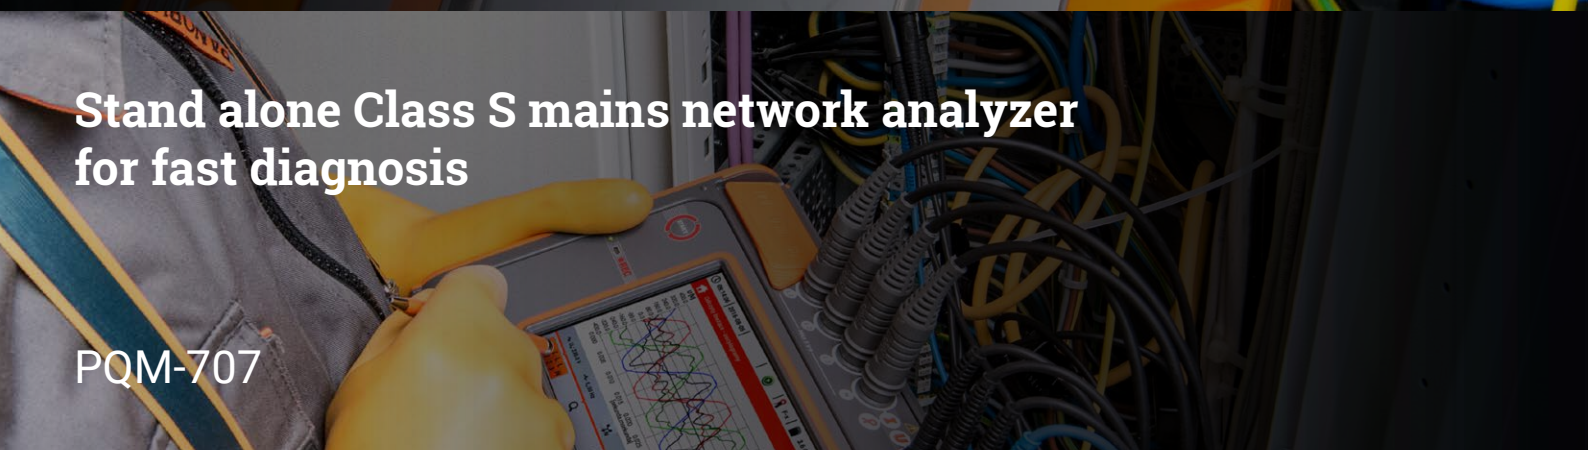A technician wearing yellow gloves is using a handheld network analyzer, the PQM-707. The device's screen shows a waveform graph. It is connected to a bundle of cables.

**Stand alone Class S mains network analyzer  
for fast diagnosis**

PQM-707

A yellow and orange network analyzer, the PQM-700, is shown mounted on a wall. It has a small screen and several ports. Cables are connected to the bottom of the device.

**Portable Class S analyzer  
for basic and long term analysis**

PQM-700



# Power quality analysis


Electricity produced in electric power industry is a typical commercial product. Therefore, it is subject to the same rules as all goods available on the market, taking into account the fact that both the provider and the receiver use the same power grid, which affects the final quality of the power supply. The industry clearly defined power quality parameters, criteria and conditions for their evaluation and rules of distribution and control. Power distribution requires the control of power quality parameters, conditions of receiving process and recording all incidents of exceeded tolerance values. Data gathered in the control process is used for statistical evaluation of the compliance of recorded parameters with applicable standards, legal requirements and contracts. The final result is a confirmation of correctness which ends the assessment or a non-compliance statement, which is related to further analysis of the problem to indicate the responsibility for exceeding limits, which may result in financial consequences.

Wide availability of electricity means that the public networks supply industrial facilities, public buildings, and the vast majority of households. Rapid technological progress resulted in a situation, where typical electric line machines, such as motors, light bulbs, resistive heaters are provided with additional power electronics that ensure easy control of the energy flow, power control and improved efficiency. The consequences of this progress, supported by the need to minimize costs, are significantly simpler solutions that cause higher levels of current and voltage distortion and interference. Power networks are now exposed to new types of impacts that deteriorate power quality, causing additional losses, which is particularly visible with increasing use of new devices.

Consumer electronics involves small power devices, but a very large number of them may significantly affect the quality of power supply in public networks.

Power electronics in industry is related to much higher values of active and passive power, systematically repeated changes of load and type of reactive power, asymmetries of single-phase and two-phase loads, current distortion, voltage dips caused by temporary network overloads and equipment failures. Therefore, the industry supply networks experience troublesome voltage fluctuations causing light flickering lights, short voltage dips, higher levels of harmonic voltages and currents as well as dangerous resonance phenomena. Other adverse incidents include discontinuities and interruptions of power supply that cause losses in production or even hazards to the life of employees. The increased amount of negative impacts causes faster and unpredictable wear of machine parts, making it difficult to plan maintenance activities. Moreover, the risk of losses due to unforeseen failures also significantly increases.

Instruments for analysing and diagnosing power quality are required to provide two basic functionalities. The first one is to assess the conformity or non-conformity of power supply parameters with binding standards and law requirements. This function is provided by all instruments offered on the market. The second functionality is to capture the phenomena that deteriorate power quality and those, which disturb proper and efficient operation of power equipment, providing flexibility to diagnose different types of networks with different nominal voltages. Presence of this feature in offered devices depends mainly on the initiative of producers of measuring equipment.

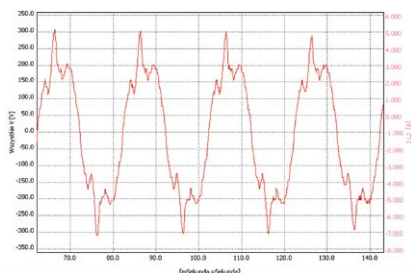

Example of the deformed current waveform

The offer of our company includes a wide range of products tailored to the needs of users:

- » Class S: **PQM-700, PQM-707,**
- » Class A: **PQM-710, PQM-711.**


The main tasks of PQM-7xx analyzers, equipped with a wide range of accessories, include the use of a high-speed memory to simultaneously record up to 4500 network parameters, including: average values, MIN and MAX values, waveforms of voltages and currents at the end of each averaging cycle. Monitored parameters include voltage increases, dips and interruptions with recorded waveforms and RMS (1/2) graphs. In addition, instruments check for exceeding tolerance values, acceptable levels or other parameters. PQM-711 analysers offer also quick waveform recording of transient currents up to 8000 V. Smart solutions used in the analyzers enable them to operate continuously with power supply from the tested network, up to 1000 V AC for CAT IV 600 V of overvoltage resistance over a wide temperature range. The analyzers also maintain full functionality for a few hours on their own battery power. Class A devices have a built-in GPS, which provides high time accuracy and a GSM modem for distant remote communication.

For close communication, the analyzers use USB connection and some types have built-in Wi-Fi module.

The measurement results provided by PQM analyzers may be used for the following purposes:

**Assessment of the quality of power supply** in relation to the regulations binding in Poland or to EN 50160 standard. The conformity assessment report indicates which parameters are exceeded in relation to their threshold values, showing percentage values on the observation period scale. The assessment covers average values of voltages and frequencies, asymmetry, flicker factor  $P_{ST}$ , THD U, voltage harmonics and additionally the maximum average active power of 15 min and tg, when necessary.

**Diagnosis and identification of voltage dips** to indicate their cause. Basing on simultaneous recording of average and limit values, as well as RMS (1/2) of voltages and currents, it is possible to indicate whether the dips were caused by outside factors or by own operation of devices. Recording the oscillograms helps to capture transients during power outages, returns or high voltage surges.

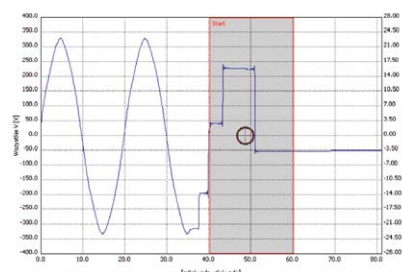


Example of power supply failure

own devices. Relating the high level of changes in active and reactive power to the waveform of the  $P_{ST}$  factor and propagation of changes with synchronous recording in several points of the network allows identifying the direction leading to the source of disturbed loads.

**Diagnosis of active and reactive power** helps to select parameters of the compensator that eliminate penalties for exceeding the reactive power limits and to verify the effectiveness and conditions of operating the battery compensating the reactive power, ensuring trouble-free operation.


**Diagnosis of voltages and currents**, used for assessing the operational conditions for electrical machines with rotating field, basing on the behaviour of symmetrical components of voltages and currents. Uneven operation of three-phase motors powered directly from the network, interferences in the work of transformers with the risk of ferro-resonances may be identified basing on the interdependence of the various parameters in combination with the waveforms of symmetrical components. The detection of these phenomena may reduce the risk of failure, increasing operational reliability of machines.

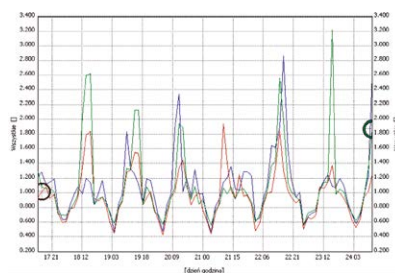

Example of exceeded  $P_L$  indicator

**Diagnosis of harmonics** based on the behaviour of voltage, current and power harmonics, which enables the user to evaluate the effects of power supply to non-line devices and their impact on the parameters of the power grid and power quality. High level of harmonics causes additional heat losses of the energy system elements, endangering the operation of these devices and generating additional costs. It is also possible to assess these risks for other power equipment supplied from the network that increase the risk of unexpected failure.

**Diagnosis of interharmonics** allows user to identify transients and dangerous behaviour of the grid that may threaten the operation of other devices. These phenomena may occur at any frequency. Interharmonics complement the harmonics in the analysis of 0 - 2500 Hz band.

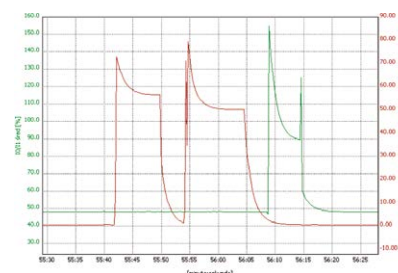






Example of asymmetry caused by connection process

**Diagnosis of voltage fluctuations and flicker** that presents the levels of voltage fluctuations and the degree of flicker nuisance, indicating the relation with the turbulent operation of

**Diagnosis of transients** based on high-speed recording of voltage, sampled at a frequency up to 10 MHz in the voltage range of  $\pm 8000$  V. It is possible to detect quick surges threatening the power electronics devices, and insulating elements. Their presence may indicate the absence or failure of surge protection or device malfunction, which in turn can lead to breakdowns and unnecessary loss.

## Comparison of power quality analyzers

					
	PQM-750	PQM-711	PQM-710	PQM-707	PQM-700
<b>STANDARDS</b>					
Compliance class acc. IEC 61000-4-30	A	A	A	S	S
Certificate from independent laboratory	✓	✓	✓	-	✓
EN 50160	✓	✓	✓	✓	✓
GOST 32144	-	✓	✓	✓	✓
AS 61000.3.100	✓	✓	✓	✓	✓
<b>MEASUREMENT INPUTS</b>					
Number of voltage inputs	5	5	5	5	4
Number of current inputs	5	4	4	4	4
GPS input	OPTION	1	1	-	-
Temperature input	✓	-	-	-	-
<b>I/O</b>					
Binary inputs	✓	-	-	-	-
Relay outputs	✓	-	-	-	-
<b>MEASUREMENTS</b>					
1-phase, split-phase, 3-phase system	✓	✓	✓	✓	✓
Frequency	✓	✓	✓	✓	✓
TRMS voltage	✓	✓	✓	✓	✓
Crest factor U	✓	✓	✓	✓	✓
voltage THD and harmonics	✓	✓	✓	✓	✓
voltage TID and interharmonics	✓	✓	✓	-	-
Monitoring of 2...150 kHz bandwidth	✓	-	-	-	-
Voltage unbalance	✓	✓	✓	✓	✓
Voltage transients (10 MHz sampling)	OPTION	✓	-	-	-
Short term flicker	✓	✓	✓	✓	✓
Long term flicker	✓	✓	✓	✓	✓
TRMS current	✓	✓	✓	✓	✓
Crest factor I	✓	✓	✓	✓	✓
Current THD and harmonics	✓	✓	✓	✓	✓
Current TID and interharmonics	✓	✓	✓	-	-
Current unbalance	✓	✓	✓	✓	✓
Inrush	✓	✓	✓	✓	✓
Harmonic power	✓	✓	✓	✓	-
Angles between harmonics	✓	✓	✓	-	-
K-factor	✓	✓	✓	-	-
Mains signalling	✓	✓	✓	-	-
Power (P, Q, D, S) acc. to IEEE 1459 or Budeanu method	✓	✓	✓	✓	✓
Power factor	✓	✓	✓	✓	✓
Cos(φ)	✓	✓	✓	✓	✓
Tan(φ)	✓	✓	✓	✓	✓
Energy (E <sub>p</sub> , E <sub>q</sub> , E <sub>s</sub> )	✓	✓	✓	✓	✓
4-quadrants energy measurements	✓	✓	✓	✓	✓
PV inverter efficiency	-	-	-	✓	-
Maximal number of parameters measurements at the same time	15000	3655	3655	1300	1200
Maximum recording time					
• Linear recording	100 years	100 years	100 years	18 years	18 years
• Circular recording	UNLIMITED	-	-	-	-
Integration period	200 ms ... 30 min	half cycle ... 120 min	half cycle ... 120 min	1 s ... 30 min	half cycle ... 30 min
<b>SAFETY</b>					
Measurement category	CAT III 600 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 760 V	CAT IV 300 V CAT III 600 V
EN 61010	✓	✓	✓	✓	✓
EN 61326	-	✓	✓	✓	✓
EN 61000-6-5 / EN 55032	✓	-	-	-	-
Anti-theft function	-	✓	✓	-	-



PQM-750



PQM-711



PQM-710



PQM-707



PQM-700

#### ENVIRONMENTAL CONDITIONS

Working temperature [°C]	-20...+55	-20...+55	-20...+55	-10...+50	-20...+55
Built-in heater	-	✓	✓	-	✓
Ingress protection	IP30	IP65	IP65	IP51	IP65
All-weather measurements	-	✓	✓	-	✓
Pole mounting	-	✓	✓	-	✓
Wall mounting	✓	-	-	-	-
DIN rail mounting	✓	✓	✓	-	✓

#### MEMORY AND COMMUNICATION

Memory	8 GB	8 GB (max. 32 GB)	8 GB (max. 32 GB)	4 GB (max. 32 GB)	4 GB (max. 32 GB)
Replaceable memory card	✓	-	-	✓	✓
USB	✓	-	-	✓	✓
USB 2.0 High Speed	✓	✓	✓	-	-
Ethernet	✓	-	-	-	-
RS-485	✓	-	-	-	-
Wi-Fi	-	✓	✓	-	-
GSM (LTE) modem	OPTION	✓	✓	-	-

#### POWER SUPPLY

Built-in Li-Ion battery	✓	✓	✓	-	✓
Replaceable Li-Ion battery	-	-	-	✓	-
Battery operating time	min. 1 h	min. 2 h	min. 2 h	min. 6 h	min. 6 h
Battery charger	internal	internal	internal	external	internal
USB charging	-	-	-	✓	-

#### GENERAL

LCD display	-	✓	✓	-	-
LCD touch screen	✓	-	-	✓	-
GPS time synchronisation	OPTION	✓	✓	-	-
IRIG-B time synchronisation	✓	-	-	-	-
NTP time synchronisation	✓	-	-	-	-
Multilanguage Sonel Analysis software	-	✓	✓	✓	✓
Built-in network interface (webserver)	✓	-	-	-	-
Paper and PDF user manual	✓	✓	✓	✓	✓
Weight	0.6 kg	1.6 kg	1.6 kg	1.75 kg	1.6 kg
Dimensions	157x87x59 mm	200x175x75 mm	200x175x75 mm	216x111x45 mm	200x175x75 mm

PQM-750



PQM-711



PQM-710



PQM-707



PQM-700



Portable Class S analyzer  
for basic and long term  
analysis

Stand alone Class S mains  
network analyzer for fast  
diagnosis


Class A high accuracy mains  
network analyzer

Top class of mains network an-  
alyzer with transients capture



## SONEL PQM-750

index: WMGBPQM750AC1R1CT5

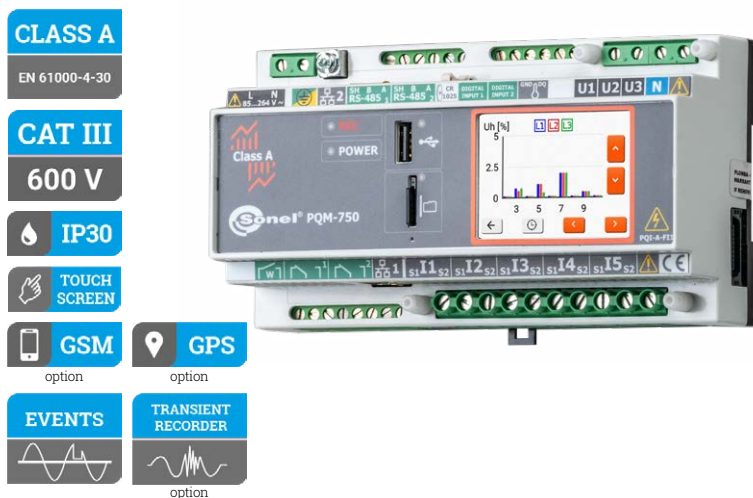

### Measured parameters

Built-in software (web interface – webserver) allows you to configure the device and view actual data. It allows measurement of the following parameters.

- » Phase RMS voltage **U** for L1, L2, L3+N/PE
- » Phase-to-phase RMS voltages **U** for L12, L23, L31
- » RMS currents **I** of all phases + N + PE
- » Crest factor **CF** of voltages and currents
- » Network frequency **f** for L1
- » Active power **P** for L1, L2, L3
- » Active power **P1** (separated 50 Hz) for L1, L2, L3
- » Reactive power **Q** for L1, L2, L3
- » Reactive power **Q1** (separated 50 Hz) for L1, L2, L3
- » Apparent power **S** for L1, L2, L3
- » Apparent power **S1** (separated 50 Hz) for L1, L2, L3
- » Three-phase total power **P<sub>3F</sub>**, **Q<sub>3F</sub>**, **S<sub>3F</sub>**
- » Three-phase total power **P<sub>13F</sub>**, **Q<sub>13F</sub>**, **S<sub>13F</sub>**
- » **cosφ** for L1, L2, L3, **cosφ<sub>3F</sub>**
- » Power factor **PF** for L1, L2, L3, **PF<sub>3F</sub>**
- » **tgφ** for L1, L2, L3, **tgφ<sub>3F</sub>**
- » Distortion power **D** for L1, L2, L3
- » Three-phase total distortion power **D<sub>3F</sub>**
- » Distortion power factor **DPF** for L1, L2, L3
- » Shape of phase voltages and currents for events
- » Phase diagrams for currents and voltages
- » Active energy for L1, L2, L3 – taken **E<sub>p+</sub>** or given **E<sub>p-</sub>**
- » Three-phase active energy – drawn **E<sub>p3F+</sub>** or given **E<sub>p3F-</sub>**
- » Inductive reactive energy for L1, L2, L3 for consumption – **E<sub>OL+</sub>**
- » Capacitive reactive energy for L1, L2, L3 for consumption – **E<sub>OC+</sub>**
- » Three-phase reactive energy for consumption – inductive **E<sub>OL3F+</sub>** and capacitive **E<sub>OC3F+</sub>**
- » Apparent energy for L1, L2, L3 – **E<sub>s</sub>**
- » Three-phase apparent energy **E<sub>s3F</sub>**
- » Harmonics **h<sub>n</sub>** to 256<sup>th</sup> in current and voltage
- » Interharmonics up to 256<sup>th</sup> in current and voltage
- » Angles between current and voltage harmonics
- » Monitoring of 2...150 kHz bandwidth
- » **U<sub>dc</sub>** phase voltage components
- » Shares of harmonic currents and voltages in relation to RMS value (%) – **h<sub>hR</sub>**
- » Shares of harmonic currents and voltages in relation to the fundamental harmonic **h<sub>1</sub>** (%) – **h<sub>hF</sub>**
- » **THD<sub>v</sub>** for voltages and currents calculated against RMS value (%)
- » **THD<sub>i</sub>** for voltages and currents calculated relative to the fundamental harmonic (%)
- » **TID<sub>v</sub>** for voltages and currents calculated against RMS value (%)
- » **TID<sub>i</sub>** for voltages and currents calculated relative to the fundamental harmonic (%)
- » Active and reactive harmonic powers
- » K-factor for **I<sub>1</sub>**, **I<sub>2</sub>**, **I<sub>3</sub>**, **I<sub>N</sub>**
- » Factor **K** (Europe)
- » Symmetrical voltage components: zero **U<sub>0</sub>**, direct **U<sub>1</sub>**, inverse **U<sub>2</sub>**
- » Symmetrical components of current: zero **I<sub>0</sub>**, direct **I<sub>1</sub>**, inverse **I<sub>2</sub>**
- » Short-term light flicker factor **P<sub>st</sub>**
- » Long-term light flicker factor **P<sub>lt</sub>**
- » Voltage unbalance
- » Current unbalance
- » Transients **U** up to 6000 V
- » Ripple control signals
- » Temperatures: **T<sub>w</sub>** (analyzer internals), **Tz1...Tz4** (1-wire)


## WEB INTERFACE

The analyzer's web interface (webserver) allows for:

- » meter configuration,
- » real-time monitoring of the meter status and measured parameters,
- » browsing the list of recorded events along with waveforms and RMS<sub>1/2</sub> graphs,
- » managing users.

The following sections are available in the interface.

- » Real time readings
  - Measurements
  - Waveforms
  - Timeplots
  - Phasors
  - Harmonics
  - Interharmonics
- » Events
  - Standard events
  - User events
- » Analyzer and recording settings

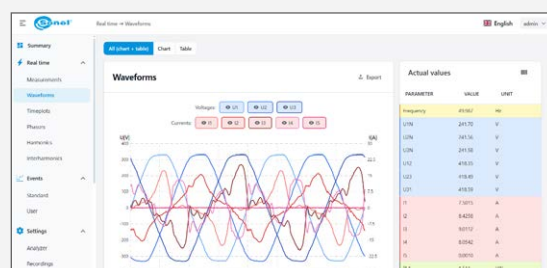

### Standard accessories:

Seal for voltage and current terminals (set of 2 pcs.)	WAPOZPLOKPL
Fork terminal for grounding terminal	WAZACWID
8 GB microSD card	WAPOZMSD8
Wall mounting kit	WAPOZUCH17
USB data transmission cable	WAPRZUSB
LAN network cable, shielded, 1.5 m	WAPRZRJ451X5EKR
Factory calibration certificate	

### The instrument is intended for operation in networks:

- » with rated frequency 50/60 Hz,
- » with rated voltages: up to 1000 V referred to ground,
- » in the following configurations:
  - single-phase,
  - two-phase with common N,
  - three-phase - star with and without N conductor,
  - three-phase - delta.
- » Capable of working with transducers.
- » A built-in rechargeable battery allows for max. one hour of operation in the event of a power failure.

### The instrument meets the requirements set forth in the standards:

- » Product standards:
  - IEC 62586-1
  - IEC 62586-2
- » Standards for measuring network parameters:
  - IEC 61000-4-30
  - IEC 61000-4-7
  - IEC 61000-4-15
  - EN 50160
- » Safety standards:
  - IEC 61010-1
  - IEC 61010-2-030
- » Standards for electromagnetic compatibility:
  - EN 55032
  - IEC 61000-6-5

## Parameters of PQM-750

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS) $U_{L-L,MAX} = 2000\text{ V}$ for $U_{L-L,MAX} = 1000\text{ V}$	—	0.0...1000.0 V	4 significant digits	$\pm 0.1\% U_{din}$
Crest Factor	Voltage	1.0...6.5 (1.65 for voltage of 690 V)	0.01	$\pm 5\%$
	Current	1.00...10.00	0.01	$\pm 5\%$
Alternating current (TRMS)	—	0...20 A	4 significant digits	$\pm 0.2\%$
Frequency	—	40.000...70.000 Hz	0.001 Hz	$\pm 0.01\text{ Hz}$
Active power IEC 62053-22 class 0,2S	—	depending on voltage and current ratio	4 significant digits	$\pm 0.2\%$
Reactive power IEC 62053-24 class 0,5S	—	depending on voltage and current ratio	4 significant digits	$\pm 0.5\%$
Apparent power	—	depending on voltage and current ratio	4 significant digits	$\pm 0.2\%$
Active energy IEC 62053-22 class 0,2S	—	depending on voltage and current ratio	4 significant digits	$\pm 0.2\%$
Reactive energy IEC 62053-24 class 0,5S	—	depending on voltage and current ratio	4 significant digits	$\pm 0.5\%$
Apparent energy	—	depending on voltage and current ratio	4 significant digits	$\pm 0.2\%$
cosφ and power factor (PF)	—	-1.000...1.000	0.001	0.05
tanφ	—	-10.000...10.000	0.001	depends on error of active and reactive power
Harmonics and interharmonics	Voltage	DC, 0...256	4 significant digits	$\pm 0.05\% U_{din}$ for m.v. < 1% $U_{din}$ $\pm 5\%$ m.v. for m.v. $\geq 1\% U_{din}$
	Current	0...256	4 significant digits	$\pm 0.15\% I_{rin}$ for m.v. < 3% $I_{rin}$ $\pm 5\%$ m.v. for m.v. $\geq 3\% I_{rin}$
THD-F	Voltage	0...20%	0.01%	$\pm 0.3\%$ (absolute error)
	Current	0...100%	0.01%	$\pm 0.3\%$ (absolute error)
Active and reactive power of harmonics	—	depending on voltage and current ratio	4 significant digits	—
Angle between current and voltage harmonics	—	-180.0...+180.0°	0.1°	$\leq 0.05^\circ$ for $n = 1$ $\leq 1^\circ$ for $2 \leq n \leq 60$ at $f_{nom} = 50\text{ Hz}$ $\leq 4^\circ$ for $61 \leq n \leq 256$ at $f_{nom} = 50\text{ Hz}$
K-Factor	—	1.0...50.0	0.01	$\pm 10\%$
Flicker index	—	0.20...10.00	0.01	$\pm 5\%$
Unbalance factor	Voltage and current	0.0...20.0%	0.1%	$\pm 0.15\%$ (absolute error)
Measurement of control signals	Voltage	up to 15% $U_{din}$ at $f_R = 5\text{...}30000\text{ Hz}$	4 significant digits	unspecified for <1% $U_{din}$ $\pm 0.15\%$ for 1...3% $U_{din}$ $\pm 5\%$ for 3...15% $U_{din}$
Emissions in band	2...9 kHz	a single frequency that is multiple of 200 Hz	0.01 V	$\pm 0.1\% U_{din}$ for m.v. < 2% $U_{din}$ $\pm 5\%$ m.v. for m.v. $\geq 2\% U_{din}$
	8...150 kHz	a single frequency that is multiple of 2 kHz	0.01 V	$\pm (5\% + 0.1\text{ V})$

## Additional features

### Standard transmission protocols

- » Modbus TCP/IP
- » Modbus RTU
- » IEC 61850
- » PQdif

### Web interface (webserver)

- » Access to the interface from any web browser

## Modularity

The instrument can be expanded with additional communication protocols and physical and software functionality.


### Additional internal modules\*

- » Transient module
- » SSR relay module
- » 18...60 V DC power supply unit

### Additional external modules\*

- » LTE GSM module
- » GPS module with IRIG-B output
- » I/O module
- » LCD 7" touch panel for full operation of the analyzer at the mounting location

\* coming soon

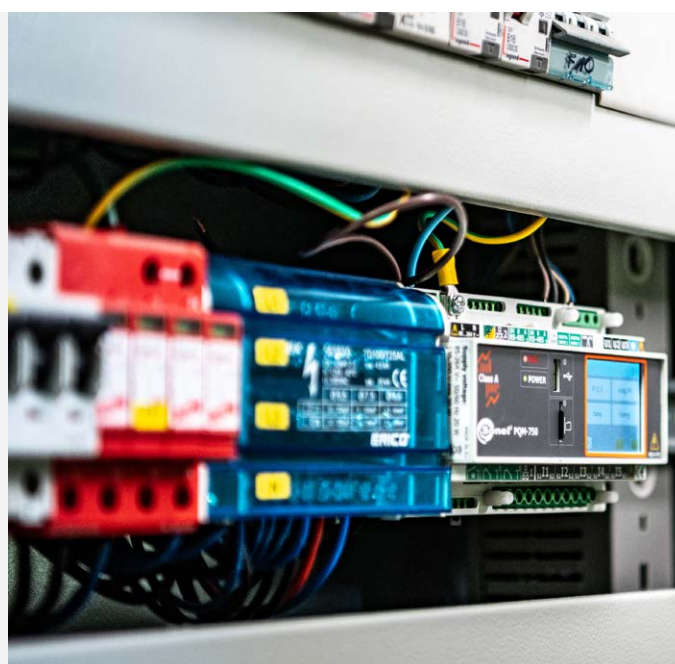

## SONEL PQM-711 / PQM-710

index: WMGBPQM711BTW / WMGBPQM710BTW



The instrument is intended for operation in networks:

- » with rated frequency 50/60 Hz,
- » with rated voltages: 64/110 V, 110/190 V, 115/200 V, 120/208 V, 127/220 V, 220/380 V, 230/400 V, 240/415 V, 254/440 V, 277/480 V, 290/500 V, 400/690 V, 480/830 V (for systems with N conductor),
- » with direct current,
- » in the following configurations:
  - single-phase,
  - two-phase with common N,
  - three-phase - star with and without N conductor,
  - three-phase - delta.
- » A built-in rechargeable battery allows for max. two hours of operation in the event of a power failure.

Measured parameters:

- » voltages L1, L2, L3, N-PE (five measurement inputs) – mean, minimum and maximum values, instant values within the range up to 1000 V, interoperability with voltage transformers,
- » currents L1, L2, L3, N (four measurement inputs) - mean, minimum and maximum values, instant values, direct current measurement within the range up to 6 kA (depending on applied current clamp), interoperability with current transformers,
- » crest factors for current (CFI) and voltage (CFV),
- » frequency within the range of 40 Hz – 70 Hz,
- » active power (P), reactive power (Q), distortion power (D), apparent power (S) with identification of the nature of reactive power (capacitive, inductive),
- » calculation of reactive power using the:
  - Budeanu method,
  - IEEE 1459,
- » active energy ( $E_p$ ), reactive energy ( $E_q$ ), apparent energy ( $E_s$ ),
- » power factor (PF),  $\cos\phi$ ,  $\tan\phi$ ,
- » K factor (transformer overload due to harmonics),
- » harmonics up to the 50th in voltage and current,
- » interharmonics measured as groups,
- » total harmonic distortion THD for current and voltage,
- » short-term ( $P_{ST}$ ) and long-term ( $P_{LT}$ ) light flicker index (in compliance with IEC 61000-4-15 class A),
- » unbalance of voltages and currents,
- » registration of overvoltages, voltage dips and breaks along with oscillograms,
- » event logging for current along with oscillograms (up to 1 s) as well as 10 ms RMS charts with maximum registration time of 30 s,
- » registration of current and voltage oscillograms after every averaging period,
- » measurement of control signals up to 3000 Hz,
- » **PQM-711 | measurement of transients up to  $\pm 8000$  V with maximum sampling frequency of 10 MHz.** The minimum transient time that can be registered is 650 ns,
- » sampling frequency: 10.24 kHz,
- » **all parameters in compliance with Class A of IEC 61000-4-30.**




It is possible to wirelessly configure the measurements and analyze measurement data using Sonel Analysis PC software.



## SONEL ANALYSIS MOBILE

Mobile version of the program supports PQM-711 and PQM-710 power quality analyzers. It can be downloaded from Google Play.

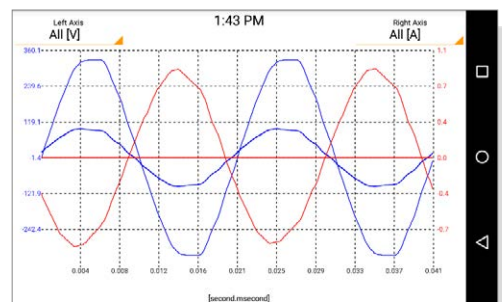

Standard accessories:

3x crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
2x crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
AC-16 line splitter	WAADAAC16
AZ-3 power supply adapter (mains plug/ banana inputs)	WAADAAZ3
Voltage adapter with M4/M6 thread (5 pcs.)	WAADAM4M6
Magnetic voltage adapter (4 pcs.)	WAADAUMAGKPL
Straps for mounting on the pole for PQM (set)	WAPOZOPAKPL
DIN rail mounting bracket with positioning catches	WAPOZUCH3
2x fastener and bands for mounting the analyzer on a pole	WAPOZUCH4
XL-2 hard case	WAWALXL2
USB cable	WAPRZUSB
Sonel Analysis 4 PC software	WAPROANALIZA4
Factory calibration certificate	

The instrument meets the requirements set forth in the standards:

- » IEC 61000-4-30 (class A) (electromagnetic compatibility - measurement methods)
- » IEC 61000-4-7 (class I) (measurements of harmonics)
- » IEC 61000-4-15 (class A) (light flicker)
- » IEC 50160 (supply voltage measurements)
- » IEC 61010-1 (safety of measuring instruments)



PQM-711/710 have an independent power source, making them particularly suited for measurements with voltage transducers.



PQM-711 enables measurement of transients up to  $\pm 8000$  V with maximum sampling frequency of 10 MHz.



## Parameters of PQM-711, PQM-710 analyzers

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	—	0.0...1000.0 V	4 significant digits	$\pm 0.1\% U_{nom}$
Crest factor	Voltage	1.00...10.00 ( $\leq 1.65$ for 690 V voltage)	0.01	$\pm 5\%$
	Current	1.00...10.00 ( $\leq 3.6 I_{nom}$ )	0.01	$\pm 5\%$
Alternating current (TRMS)	—	depending on clamp*	4 significant digits	$\pm 0.1\% I_{nom}$ (error does not account for clamp error)
Frequency	—	40.00...70.00 Hz	0.01 Hz	$\pm 0.01$ Hz
Active, reactive, apparent and distortion power	—	depending on configuration (instrument transformers, clamp)	4 significant digits	depending on configuration (instrument transformers, clamp)
Active, reactive apparent energy	—	depending on configuration (instrument transformers, clamp)	4 significant digits	as power error
cos $\phi$ and power factor (PF)	—	-1.00...1.00	0.01	$\pm 0.03$
tg $\phi$	—	-10.00...10.00	0.01	depends on error of active and reactive power
Harmonics and inter-harmonics	Voltage	DC, 1...50	as for alternating voltage True RMS	$\pm 0.05\% U_{nom}$ for m.v. < 1% $U_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 1\% U_{nom}$
	Current	DC, 1...50	as for alternating current True RMS	$\pm 0.15\% I_{nom}$ for m.v. < 3% $I_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 3\% I_{nom}$
THD	Voltage	0.0...100.0% (relative to RMS value)	0.1%	$\pm 5\%$
	Current			$\pm 5\%$
Active and reactive power of harmonics	—	depending on configuration (instrument transformers, clamp)	depends on minimum current and voltage values	—
Angle between current and voltage harmonics	—	-180.0...+180.0°	0.1°	$\pm (n \times 1^\circ)$
K-Factor	—	1.0...50.0	0.1	$\pm 10\%$
Flicker index	—	0.20...10.00	0.01	$\pm 5\%$
Voltage unbalance	Voltage and current	0.0...20.0%	0.1%	$\pm 0.15\%$ (absolute error)
Measurement of control signals	Voltage	up to 15% $U_{nom}$ at 5.00...3000.00 Hz	4 significant digits	unspecified for <1% $U_{nom}$ $\pm 0.15\%$ for 1...3% $U_{nom}$ $\pm 5\%$ for 3...15% $U_{nom}$
PQM-711   Measurement of transients	Voltage	$\pm 8000$ V	4 significant digits	$\pm (5\% + 25 \text{ V})$

\*F-1A1, F-2A1, F-3A1 clamp: 0...1500 A AC (10 000 A<sub>pp</sub>) • F-1A, F-2A, F-3A clamp: 0...3000 A AC (10 000 A<sub>pp</sub>) • F-1A6, F-2A6, F-3A6 clamp: 0...6000 A AC (10 000 A<sub>pp</sub>)

C-4A clamp: 0...1000 A AC (3600 A<sub>pp</sub>) • C-5A clamp: 0...1000 A AC/DC (3600 A<sub>pp</sub>) • C-6A clamp: 0...10 A AC (36 A<sub>pp</sub>) • C-7A clamp: 0...100 A AC (360 A<sub>pp</sub>)



## SONEL PQM-707

index: WMGBPQM707 / WMGBPQM707NC (without F-3A coils)



### Measured parameters:

- » voltages L1, L2, L3, N-PE (five measurement inputs) – mean, minimum and maximum values within the range up to 760 V, interoperability with voltage transformers,
- » Currents L1, L2, L3, N (four measurement inputs) - mean, minimum and maximum values, current measurement within the range up to 6 kA (depending on applied current clamp), interoperability with current transformers,
- » Crest factors for current (CFI) and voltage (CFU),
- » Frequency within the range of 40 Hz – 70 Hz,
- » Active power (P), reactive power (Q), distortion power (D), apparent power (S) with identification of the nature of reactive power (capacitive, inductive),
- » Power registration: Budeanu method, IEEE 1459,
- » Active energy ( $E_p$ ), reactive energy ( $E_q$ ), apparent energy ( $E_s$ ),
- » Power factor (PF),  $\cos\phi$ ,  $\tan\phi$ ,
- » Harmonics up to the 50th in voltage and current,
- » Total harmonic distortion THD for current and voltage,
- » Short-term ( $P_{st}$ ) and long-term ( $P_{lt}$ ) light flicker index (in compliance with IEC 61000-4-15 class S),
- » Unbalance of voltages (in compliance with IEC 61000-4-30 class S) and currents,
- » Event logging for current and voltage along with oscillograms and half-period RMS charts,
- » Inrush current,
- » Energy cost calculator,
- » Testing the efficiency of PV inverters,
- » sampling frequency: 10.24 kHz,
- » **All parameters are registered in compliance with class S acc. to standard IEC 61000-4-30.**

### Parameters of PQM-707

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	—	0.0...760.0 V	4 significant digits	$\pm 0.5\% U_{nom}$
Crest factor	Voltage	1.00...10.00 ( $\leq 1.65$ for 690 V voltage)	0.01	$\pm 5\%$
	Current	1.00...10.00 ( $\leq 3.6 I_{nom}$ )	0.01	$\pm 5\%$
Alternating current TRMS	—	depending on clamp*	$0.01\% I_{nom}$	$\pm 0.2\% I_{nom}$ (error does not account for clamp error)
Frequency	—	40.00...70.00 Hz	0.01 Hz	$\pm 0.05$ Hz
Active, reactive, apparent and distortion power	—	depending on configuration (instrument transformers, clamp)	4 significant digits	depending on configuration (instrument transformers, clamp)
Active, reactive apparent energy	—	depending on configuration (instrument transformers, clamp)	4 significant digits	as power error
$\cos\phi$ and power factor (PF)	—	0.00...1.00	0.01	$\pm 0.03$
$\tan\phi$	—	0.00...10.00	0.01	depends on error of active and reactive power
Harmonics	Voltage	DC, 1...50	as for alternating voltage True RMS	$\pm 0.15\% U_{nom}$ for m.v. < 3% $U_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 3\% U_{nom}$
	Current	DC, 1...50	as for alternating current True RMS	$\pm 0.5\% I_{nom}$ for m.v. < 10% $I_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 10\% I_{nom}$
THD	Voltage	0.0...100.0%	0.1%	$\pm 5\%$
	Current	(relative to RMS value)		$\pm 5\%$
Flicker index	—	0.40...10.00	0.01	$\pm 10\%$
Unbalance factor	Voltage and current	0.0...10.0%	0.1%	$\pm 0.15\%$ (absolute error)
Inrush current	Current	depending on clamp*	$0.01\% I_{nom}$	$\pm 4\%$ m.v. for m.v. $\geq 10\% I_{nom}$ $\pm 4\% I_{nom}$ for m.v. < 10% $I_{nom}$ (RMS1/2)

\*F-1A1, F-2A1, F-3A1 clamp: 0...1500 A AC (10 000 A<sub>pp</sub>) • F-1A, F-2A, F-3A clamp: 0...3000 A AC (10 000 A<sub>pp</sub>) • F-1A6, F-2A6, F-3A6 clamp: 0...6000 A AC (10 000 A<sub>pp</sub>)

C-4A clamp: 0...1000 A AC (3600 A<sub>pp</sub>) • C-5A clamp: 0...1000 A AC/DC (3600 A<sub>pp</sub>) • C-6A clamp: 0...10 A AC (36 A<sub>pp</sub>) • C-7A clamp: 0...100 A AC (360 A<sub>pp</sub>)

### Standard accessories:

3x crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
2x crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02
4x F-3A flexible coil (Ø120 mm)	WACEGF3AOKR
Test lead 2.2 m, black, 1 kV with L1 marker (banana plugs)	WAPRZ2X2BLBBL1
Test lead 2.2 m, black, 1 kV with L2 marker (banana plugs)	WAPRZ2X2BLBBL2
Test lead 2.2 m, black, 1 kV with L3 marker (banana plugs)	WAPRZ2X2BLBBL3
Test lead 2.2 m, blue, 1 kV (banana plugs)	WAPRZ2X2BUBB
Test lead 2.2 m, yellow / green, 1 kV (banana plugs)	WAPRZ2X2GRYEBB
Magnetic voltage adapter (set - 4 pcs)	WAADAUMAGKPL
AC-16 line splitter	WAADAAC16
Li-Ion battery 11.1 V 3.4 Ah	WAAKU15
AZ-2 power supply adapter (IEC C7 plug/ banana connectors)	WAADAAZ2
230 V mains cable (IEC C7 plug)	WAPRZLAD230
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12SAM
Z7 Power supply	WAZASZ7
L2 hanging straps (set)	WAPOZSZEKPL
L4 carrying case	WAFUTL4
USB cable	WAPRZUSB
Touchscreen pen	WAPOZTPEN
Sonei Analysis PC software	WAPROANALIZA4
Factory calibration certificate	

### The instrument is intended for operation in networks:

- » **with rated frequency** 50/60 Hz,
- » **with rated voltages:** 58/100 V, 64/110 V; 110/190 V; 115/200 V; 120/208 V, 127/220 V; 133/230 V, 220/380 V; 230/400 V; 240/415 V; 254/440 V; 290/500 V, 400/690 V,
- » **with direct current.**

### Supported network configurations:

- » single-phase,
- » two-phase with common N,
- » three-phase - star with and without N conductor,
- » three-phase - triangle.

## SONEL PQM-700

index: WMGBPQM700

CLASS S

IEC 61000-4-30

CAT IV

300 V

IP65



## The instrument is intended for operation in networks:

- » with rated frequency 50/60 Hz,
- » with rated voltages: 64/110 V; 110/190 V; 115/200 V; 120/208 V; 127/220 V; 220/380 V; 230/400 V; 240/415 V; 254/440 V; 277/480 V; 290/500 V; 400/690 V,
- » with direct current,
- » in the following configurations:
  - single-phase,
  - two-phase with common N,
  - three-phase - star with and without N conductor,
  - three-phase - triangle.

## The device conforms to class S according to IEC 61000-4-30

- » IEC 61000-4-30 (electromagnetic compatibility - measurement methods)
- » IEC 61000-4-7 (measurements of harmonics)
- » IEC 61000-4-15 (light flicker)
- » IEC 50160 (supply voltage measurements)
- » IEC 61010-1 (safety of measuring instruments)
- » IEC 61326 (electromagnetic compatibility - electrical equipment for measurement)



PQM-700 has an independent power source, making it particularly suited for measurements with voltage transducers.

## Parameters of PQM-700

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	—	0.0...760.0 V	4 significant digits	$\pm 0.5\% U_{nom}$
Crest factor	Voltage	1.00...10.00 ( $\leq 1.65$ for 690 V voltage)	0.01	$\pm 5\%$
	Current	1.00...10.00 ( $\leq 3.6 I_{nom}$ )	0.01	$\pm 5\%$
Alternating current TRMS	—	depending on clamp*	4 significant digits	$\pm 0.2\% I_{nom}$ (error does not account for clamp error)
Frequency	—	40.00...70.00 Hz	0.01 Hz	$\pm 0.05$ Hz
Active, reactive, apparent and distortion power	—	depending on configuration (instrument transformers, clamp)	4 significant digits	depending on configuration (instrument transformers, clamp)
Active, reactive apparent energy	—	depending on configuration (instrument transformers, clamp)	4 significant digits	as power error
$\cos \varphi$ and power factor (PF)	—	0.00...1.00	0.01	$\pm 0.03$
$\tan \varphi$	—	0.00...10.00	0.01	depends on error of active and reactive power
Harmonics	Voltage	DC, 1...40	as for alternating voltage True RMS	$\pm 0.15\% U_{nom}$ for m.v. < 3% $U_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 3\% U_{nom}$
	Current	DC, 1...40	as for alternating current True RMS	$\pm 0.5\% I_{nom}$ for m.v. < 10% $I_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 10\% I_{nom}$
THD	Voltage	0.0...100.0% (relative to RMS value)	0.1%	$\pm 5\%$
	Current			$\pm 5\%$
Flicker index	—	0.40...10.00	0.01	$\pm 10\%$
Unbalance factor	Voltage and current	0.0...10.0%	0.1%	$\pm 0.3\%$ (absolute error)

\*F-1A1, F-2A1, F-3A1 clamp: 0...1500 A AC (10 000 A<sub>pp</sub>) • F-1A, F-2A, F-3A clamp: 0...3000 A AC (10 000 A<sub>pp</sub>) • F-1A6, F-2A6, F-3A6 clamp: 0...6000 A AC (10 000 A<sub>pp</sub>)  
C-4A clamp: 0...1000 A AC (3600 A<sub>pp</sub>) • C-5A clamp: 0...1000 A AC/DC (3600 A<sub>pp</sub>) • C-6A clamp: 0...10 A AC (36 A<sub>pp</sub>) • C-7A clamp: 0...100 A AC (360 A<sub>pp</sub>)

## Standard accessories:

3x crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
2x crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02
AZ-3 power supply adapter (mains plug/ banana inputs)	WAADAAZ3
4x magnetic voltage adapter (set - 4 pcs)	WAADAUMAGKPL
Straps for mounting on the pole for PQM (set)	WAPOZOPAKPL
DIN rail mounting bracket with positioning catches	WAPOZUCH3
2x fasteners and bands for mounting the analyzer on a pole	WAPOZUCH4
L5 carrying case	WAFUTL18
USB cable	WAPRZUSB
Sonel Analysis 4 software	WAPROANALIZA4
Factory calibration certificate	

## Measured parameters (EN 50160-4-30, class S):

- » voltages L1, L2, L3 (four measurement inputs) – mean, minimum and maximum values, instant values within the range up to 760 V, interoperability with voltage transformers,
- » currents L1, L2, L3, N (four measurement inputs) - mean, minimum and maximum values, instant values, current measurement within the range up to 6 kA (depending on applied current clamp), interoperability with current transformers,
- » crest factors for current (CFI) and voltage (CFV),
- » frequency within the range of 40 Hz – 70 Hz,
- » active power (P), reactive power (Q), distortion power (D), apparent power (S) with identification of the nature of reactive power (capacitive, inductive),
- » calculation of reactive power using the:
  - Budeanu method,
  - IEEE 1459,
- » active energy (E<sub>p</sub>), reactive energy (E<sub>q</sub>), apparent energy (E<sub>s</sub>),
- » power factor (PF),  $\cos \varphi$ ,  $\tan \varphi$ ,
- » harmonics up to the 40th in voltage and current,
- » total harmonic distortion THD for current and voltage,
- » short-term (P<sub>st</sub>) and long-term (P<sub>lt</sub>) light flicker index (in compliance with EN 61000-4-15 class S),
- » unbalance of voltages (in compliance with EN 61000-4-30 class S) and currents,
- » event logging for current and voltage along with oscillograms and half-period RMS charts,
- » sampling frequency: 10.24 kHz,
- » all parameters are registered in compliance with class S according to standard EN 61000-4-30.



## Optional accessories for analyzers



**C-4A**

WACEGC4AOKR



**C-5A**

WACEGC5AOKR



**C-6A**

WACEGC6AOKR



**C-7A**

WACEGC7AOKR

	<b>C-4A</b> WACEGC4AOKR	<b>C-5A</b> WACEGC5AOKR	<b>C-6A</b> WACEGC6AOKR	<b>C-7A</b> WACEGC7AOKR
Rated current	1000 A AC	1000 A AC 1400 A DC	10 A AC	100 A AC
Frequency	30 Hz...10 kHz	DC...5 kHz	40 Hz...10 kHz	40 Hz...1 kHz
Max. diameter of measured conductor	52 mm	39 mm	20 mm	24 mm
Minimum accuracy	≤0.5%	≤1.5%	≤1%	0,5%
Battery power	—	✓	—	—
Lead length	2.2 m	2.2 m	2.2 m	3 m
Measurement category	IV 300 V	IV 300 V	IV 300 V	III 300 V
Ingress protection	IP40			



**F-1A1 / F-1A / F-1A6**

WACEGF1A1OKR  
WACEGF1AOKR  
WACEGF1A6OKR



**F-2A1 / F-2A / F-2A6**

WACEGF2A1OKR  
WACEGF2AOKR  
WACEGF2A6OKR



**F-3A1 / F-3A / F-3A6**

WACEGF3A1OKR  
WACEGF3AOKR  
WACEGF3A6OKR



**F-2AHD**


WACEGF2AHDOKR



**F-3AHD**

WACEGF3AHDOKR



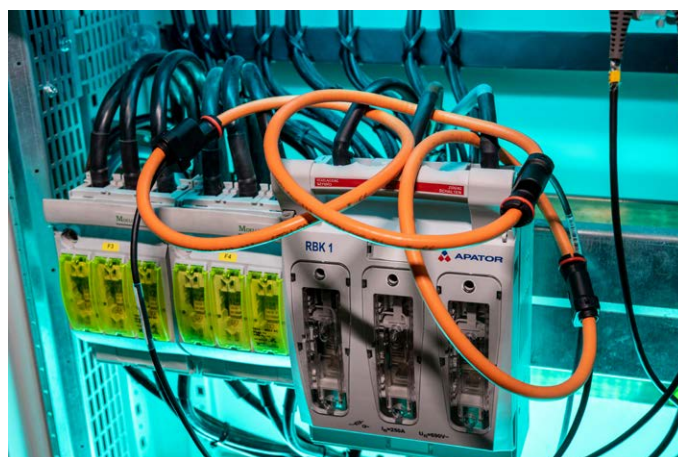

















	WACEGF1AOKR	WACEGF2AOKR	WACEGF3AOKR		
Rated current	1500 / 3000 / 6000 A AC	1500 / 3000 / 6000 A AC	1500 / 3000 / 6000 A AC	3000 A AC	
Frequency	40 Hz...10 kHz			10 Hz...20 kHz	
Max. diameter of measured conductor	380 mm	250 mm	140 mm	290 mm	145 mm
Minimum accuracy	0.5%			0.5%	
Battery power	—			—	
Lead length	2.5 m			2.5 m	
Measurement category	IV 600 V			IV 600 V	
Stopień ochrony obudowy	IP67			IP65	



# PQM

## Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	PQM-750	PQM-711	PQM-710	PQM-707	PQM-700
	AGT-16C adapter (for 3-phase outlets)	WAADAAGT16C		•	•	•	•
	AGT-16P adapter (for 3-phase outlets)	WAADAAGT16P		•	•	•	•
	AGT-16T adapter (for industrial outlets)	WAADAAGT16T		•	•	•	•
	AGT-32C adapter (for 3-phase outlets)	WAADAAGT32C		•	•	•	•
	AGT-32P adapter (for 3-phase outlets)	WAADAAGT32P		•	•	•	•
	AGT-32T adapter (for industrial outlets)	WAADAAGT32T		•	•	•	•
	AGT-63P adapter (for 3-phase outlets)	WAADAAGT63P		•	•	•	•
	Cable adapter for control terminals CAT II / 1000 V (5 pcs.)	WAADAPRZKPL1		•	•	•	•
	Voltage adapter for energy measuring terminal block (5 pcs)	WAADASKA		•	•	•	•
	Magnetic adapter (4 pcs.)	WAADAUMAGKPL		1	1	1	1
	Magnetic adapter, black	WAADAUMAGKBL		•	•	•	•
	Magnetic adapter, blue	WAADAUMAGKBU		•	•	•	•
	Voltage adapter with M4 / M6 thread	WAADAM4M6		1	1	•	•
	Voltage adapter with M4 / M6 thread, black	WAADAM4M6BL		•	•	•	•
	Voltage adapter with M4 / M6 thread, blue	WAADAM4M6BU		•	•	•	•
	Voltage adapter with M4 / M6 thread, yellow	WAADAM4M6YE		•	•	•	•
	AC-16 line splitter adapter	WAADAAC16		1	1	1	•
	AZ-2 power supply adapter (IEC C7 plug / banana sockets)	WAADAAZ2				1	
	AZ-3 power supply adapter (mains plug / banana sockets)	WAADAAZ3		1	1		1
	Li-Ion 3.6 V 4.5 Ah battery (replaceable in the SONEL S.A. service)	WAAKU11		1	1		1





















## PQM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	PQM-750	PQM-711	PQM-710	PQM-707	PQM-700
	Li-Ion 11.1 V 3.4 Ah battery	WAAKU15				1	
	GPS antenna	WAPOZANT10GPS		•	•		
	GSM signal repeater	WAPOZANTREPEATER		•	•		
	Flexible clamp F-1A (Ø 380 mm) 3 kA	WACEGF1AOKR		•	•	•	•
	Flexible clamp F-2A (Ø 255 mm) 3 kA	WACEGF2AOKR		•	•	•	•
	Flexible clamp F-3A (Ø 140 mm) 3 kA	WACEGF3AOKR		•	•	4	•
	Flexible clamp F-1A1 (Ø 380 mm) 1.5 kA F-1A6 (Ø 380 mm) 6 kA	WACEGF1A1OKR WACEGF1A6OKR		•	•	•	•
	Flexible clamp F-2A1 (Ø 250 mm) 1.5 kA F-2A6 (Ø 250 mm) 6 kA	WACEGF2A1OKR WACEGF2A6OKR		•	•	•	•
	Flexible clamp F-3A1 (Ø 140 mm) 1.5 kA F-3A6 (Ø 140 mm) 6 kA	WACEGF3A1OKR WACEGF3A6OKR		•	•	•	•
	Flexible clamp F-2AHD (Ø 290 mm) 3 kA	WACEGF2AHDOKR		•	•	•	•
	Flexible clamp F-3AHD (Ø 145 mm) 3 kA	WACEGF3AHDOKR		•	•	•	•
	C-4A current clamp (Ø 52 mm) 1000 A AC	WACEGC4AOKR		•	•	•	•
	C-5A current clamp (Ø 39 mm) 1000 A AC/DC	WACEGC5AOKR		•	•	•	•
	C-6A current clamp (Ø 20 mm) 10 A AC	WACEGC6AOKR		•	•	•	•
	C-7A current clamp (Ø 24 mm) 100 A AC	WACEGC7AOKR		•	•	•	•
	L-4 carrying case	WAFUTL4				1	
	L-18 carrying case	WAFUTL18					1
	L-19 backpack	WAFUTL19				•	
	Crocodile clip, black 1 kV 20 A	WAKROBL20K01		3	3	3	3
	Crocodile clip, red 1 kV 20 A	WAKRORE20K02		2	2	2	2




















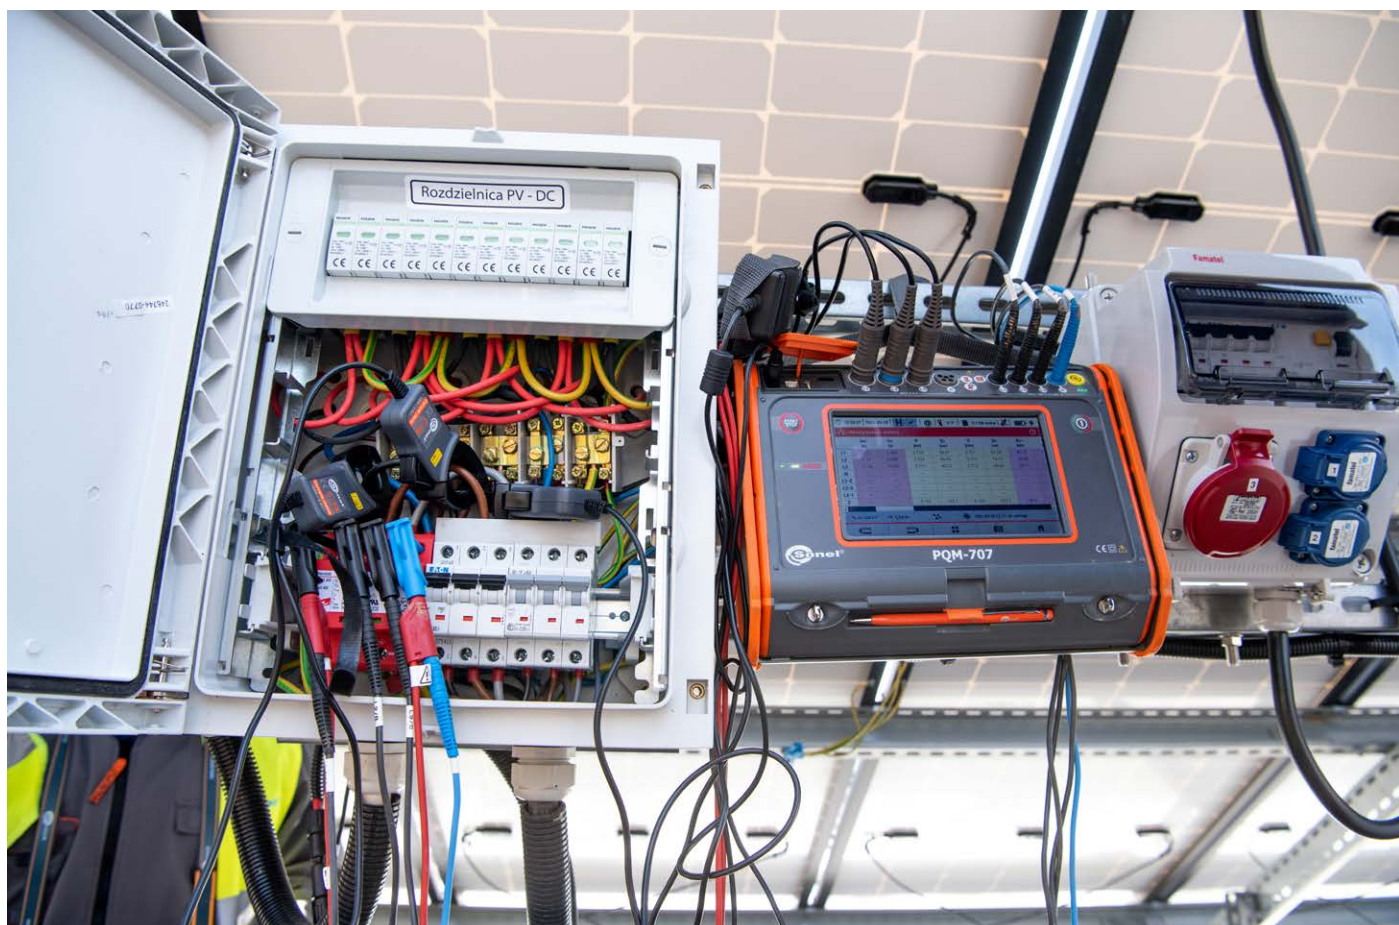
Photo	Name	Index	PQM-750	PQM-711	PQM-710	PQM-707	PQM-700
	Crocodile clip, blue 1 kV 20 A	WAKROBU20K02		1	1	1	1
	Crocodile clip, yellow 1 kV 20 A	WAKROYE20K02		1	1	1	
	Lead 2.2 m, black 1 kV with L1 marker (banana plugs)	WAPRZ2X2BLBBL1				1	
	Lead 2.2 m, black 1 kV with L2 marker (banana plugs)	WAPRZ2X2BLBBL2				1	
	Lead 2.2 m, black 1 kV with L3 marker (banana plugs)	WAPRZ2X2BLBBL3				1	
	Lead 2.2 m, blue 1 kV (banana plugs)	WAPRZ2X2BUBB				1	
	Lead 2.2 m, yellow-green 1 kV (banana plugs)	WAPRZ2X2GRYEBB				1	
	USB data transmission cable	WAPRZUSB	1	1	1	1	1
	LAN network cable, shielded, 1.5 m	WAPRZRJ451X5EKR	1				
	Pin probe, black 1 kV (banana socket)	WASONBLOGB1				•	
	Pin probe, red 1 kV (banana socket)	WASONREOGB1				•	
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1				•	
	Pin probe, yellow 1 kV (banana socket)	WASONYEGB1				•	
	Voltage probe with grasper (5 pcs.)	WASONKGB1KPL		•	•	•	•
	Flat test clip for busbars (5 pcs.)	WASONCGB1KPL		•	•	•	•
	Flat test clip for busbars black	WASONBLCGB1		•	•	•	•
	Flat test clip for busbars blue	WASONBUCGB1		•	•	•	•
	Flat test clip for busbars green	WASONGRCGB1		•	•	•	•
	ASX-1 piercing adapter (4 pcs.)	WAADAPRZASX1KPL		•	•	•	•
	Hanging straps (type L-2)	WAPOZSZEKPL				1	

## PQM

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	PQM-750	PQM-711	PQM-710	PQM-707	PQM-700
	Strap for mounting on the pole (set)	WAPOZOPAKPL		1	1		1
	DIN rail mounting bracket with positioning catches	WAPOZUCH3		1	1		1
	Plates for pole mounting	WAPOZUCH4		2	2		2
	Magnetic holder for mounting the meter (2 pcs.)	WAPOZUCH5		•	•		•
	Case for hanging with a magnetic strap (universal)	WAPOZUCH8				•	
	Cover (universal)	WAPOZUCH12				•	
	Wall mounting kit	WAPOZUCH17	1				
	Hard carrying case for clamps	WAWALL2		•	•	•	•
	XL-2 hard case	WAWALXL2		1	1		•
	XL-12 hard case	WAWALXL12				•	
	Cable for battery charging from the car lighter socket 12 V	WAPRZLAD12SAM				1	
	Mains cable 230 V (IEC C7 plug)	WAPRZLAD230				1	
	Z7 power supply adaptor	WAZASZ7				1	
	8 GB microSD card	WAPOZMSD8	1				
	Seal for voltage and current terminals (set of 2 pcs.)	WAPOZPLOKPL	1				
	Fork terminal for grounding terminal	WAZACWID	1				
	Touchscreen pen	WAPOZTPEN				1	





## SONEL ANALYSIS

index: WAPROANALIZA4




"SONEL Analysis" software - application delivered as standard accessory, indispensable for working with PQM-series analyzers. It enables:

- » analyzer configuration,
- » data reading from logger,
- » preview of network parameters in real time (with capability of reading via GSM modem),
- » deletion of data in the analyzer,
- » data presentation in tables,
- » data presentation in charts,
- » data analysis and generating reports in compliance with standard EN 50160 (reports) and other user defined reference conditions - also for PV micro-installations up to 50 kW, a breakdown for active power states  $P > 0$ ,  $P < 0$  and  $P = 0$  and taking into account the graphs  $Q_1 = f(U_1/U_n)$  and  $\cos\varphi = f(P/P_n)$ ,
- » independent support of multiple analyzers,
- » analyzer firmware updates.

### Analyzer configuration

The application enables configuration of all analyzer settings. Configuration is performed on a computer and then sent to the analyzer. A configuration can also be saved on a hard disk or other data carriers for later use.

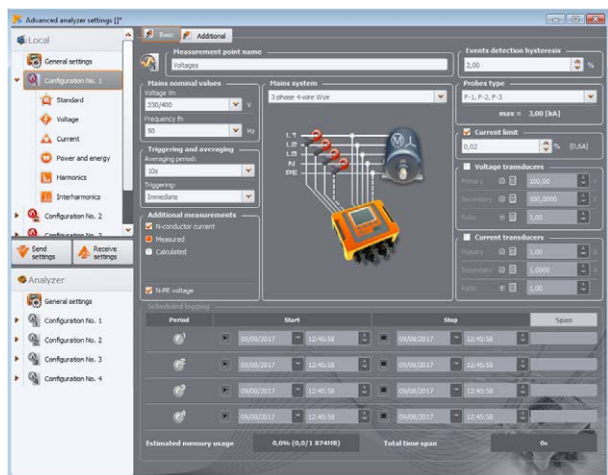

The application enables configuration of, among other things:

- » selection of measurement points and arbitrary memory assignment to individual measurement points,
- » configurable analyzer time,
- » button blockade,
- » PIN code protection against unauthorized access by third parties,
- » configurable averaging time,
- » selection of current and voltage transformers,
- » selection of triggering mode (instant after an event occurs or according to set time schedule),
- » selection of clamp type, selection of additional parameters to be registered in N and PE conductors,
- » selection of the network type for which the analyzer will register all parameters set by the user.

The analyzer has four, mutually independent measurement points. Each measurement point can be configured separately so that four different registrations can be performed later without the need for reprogramming the analyzer in each instance.

The following can be configured for each measurement point:

- » whether the analyzer is to perform registration in terms of compliance with standard EN 50160 and/or according to user-defined parameters,
- » the user may define whether the logger will save instant, mean, maximum or minimum values for each parameter,
- » limits can be defined for most parameters, and the analyzer will log an event if these limits are crossed.

### Readout of current data

Sonel Analysis software enables readout of selected parameters and their visualization on the computer screen in real time. These parameters are measured independently from the registration saved on the memory card. The user can view:

- » charts of voltage and current progression (oscilloscope),
- » charts of voltage and current over time,
- » phasor diagrams,
- » measurements of multiple parameters,
- » harmonics and harmonic powers (estimating the direction of harmonics),
- » interharmonics.

### Data analysis

Using the application, the user can read and analyze data saved on the memory card. Read data can also be saved on the computer's hard disk for later processing. Thanks to this, archiving of data from successive registrations is possible.


After data reading, the user can conduct analysis. There are three windows to choose from:

- » **General** – all individual types of data are displayed in the form of dots (Measurements, Events and Oscillograms),
- » **Measurements** – all measurement types registered are displayed in the form of dots according to averaging time (voltage, frequency, etc.),
- » **Events** – all types of detected events are displayed in the form of dots (dips, overvoltages, breaks, etc.),
- » **Configuration** – all settings with which data was registered are displayed.

Various types of charts are available in the application, enabling the user to view data registered by the analyzer in a simple way:

- » **Time chart** – displays the progressions of selected parameters over time,
- » **Oscillogram** – instant progressions of voltages and currents during events or at the end of an averaging cycle,
- » **Harmonics chart** – bar graph presenting the level of harmonics of orders 1..50,
- » **value/Time chart** – displays events in the form of dots as a function of the duration of these events.

User-defined reports can be generated using data read from the analyzer, which can then be saved to a hard disk in PDF, HTML, CSV or TXT file format. The application enables generation of a report on compliance with standard EN 50160 and the systems regulation.

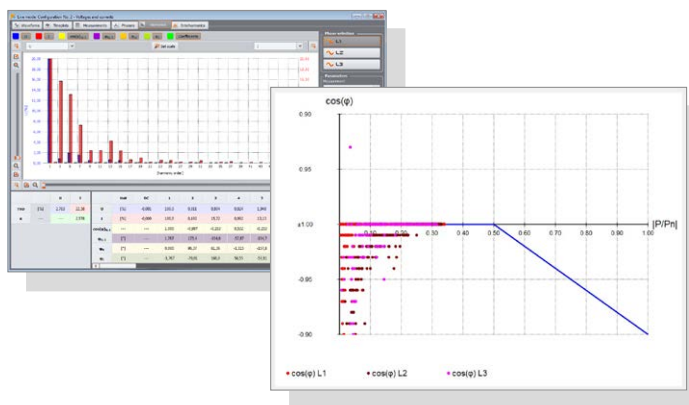


## SONEL ANALYSIS MOBILE



Mobile version of the program cooperating with PQM-711 and PQM-710 from Sonel company. With the application, you can connect directly to your device via the Wi-Fi interface and check of current readings of network parameters to which the analyzer is connected.

Useful for users can be remotely start/stop recording, and to change the measurement point (configuration) in the analyzer.

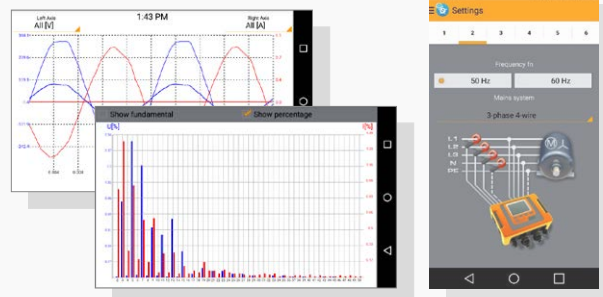

## Portable appliance testers



PAT-96  
PAT-95



PAT-10  
PAT-2E  
PAT-2



# Safety of electrical equipment

The rules and obligations concerning use of various types of electrical equipment, in both private and professional life, are defined by a broad range of regulations, which, besides imposing the obligation of creating products compliant with the relevant standards on the manufacturer, also **impose responsibility for the technical condition of this equipment and tools on their owners**. These regulations additionally define proper performance of regular tests and inspections as well as checks of equipment after repairs. Therefore, it is worth inspecting the technical condition of owned electrical equipment in the proper manner and with the appropriate frequency. Defective equipment, often damaged without the user's knowledge, poses a great threat to the user, but it can also be the cause of serious financial loss, e.g. in the event of a fire. In such a case, if it is proven that equipment was not fully operational (e.g. damaged insulation), **the manufacturer's liability for the incident is transferred to the owner**. In addition, this may constitute grounds for the insurer's refusal to pay damages.

In 2020, CENELEC (European Committee for Electrotechnical Standardization) published EN 50678 standard on the protective measures of electrical equipment after repair and EN 50699 standard on periodic testing. Both standards (EN 50678 and EN 50699) have been implemented as national standards in many countries – e.g. in Germany and Slovakia – whereas other countries are planning to implement these standards in the near future.

Every tester who uses a safety meter for electrical equipment assumes great responsibility for the both the health and life of users, as well as for their property, when making the decision on whether or not to approve tested equipment for use. Such a person should have a professional meter at their disposal, guaranteeing high accuracy and correct results.

The functions and technical specifications of testers for electrical equipment should allow for complete inspection of the technical condition of electrical equipment and tools, including checks of basic parameters of three-phase equipment. In addition, to ensure the user's work safety and proper measurement results, instruments should be capable of measuring the parameters of the power network (i.e. voltage, frequency, continuity resistance and voltage on protective conductor) immediately after start-up. The capability of performing tests is very useful considering:

- » **automatic mode** – with configuration of custom measurement sequences of parameters selected by the user,
- » **manual mode I** – due to the diversity of tests and standards for different equipment.

**Preliminary test (visual)** – the meter checks the continuity of L-N conductor and then it shows on the screen the moment when the (visual) inspection the device should take place. Then the tested object should be checked for:

- » condition of the housing,
- » operation of switches,
- » power cord and mains plug,
- » mechanical components,
- » condition of warning and safety elements.

**Measurement of protective conductor (PE) resistance** – it is carried out with 200 mA current, 10 A or 25 A depending on the requirements and regulations. Resistance of the measurement cable must not affect the measurement result, therefore autozeroing should be performed on the wire measurement cable using the four-wire method.

**Insulation resistance measurement** – typically required measuring voltage is 500 V DC, but some of the equipment (especially IT) requires a reduced voltage of 250 V or even 100 V. In contrast, industrial machinery and equipment may be tested in some cases with a higher voltage – up to 1000 V.

**Measurement of leakage currents** – the ability to measure equivalent leakage current, differential leakage current, touch leakage current and PE leakage current. The device should provide testing in a wide frequency band.

**Functional test** – consists in measuring the parameters of power supply while the tested device is activated. The following parameters are measured/tested: power values, voltage, current, factors of cosφ PF and THD.

**Test of IEC cables and extension cords** – automatic check of basic parameters of IEC cables and additionally (when a suitable adapter is used) tests on extension cords and cables with IEC 60320-C5 plug. The measurement sequence is performed automatically, and consists of:

- » measurement of PE core insulation resistance,
- » measurement of PE core resistance (continuity),
- » continuity test of L and N conductors and a check for short circuit between them,
- » polarity check.

After setting the measurement duration, programming limit values and completing the measurement, the meter is able to assess the condition of the tested device. With the option of creating measurement sequences, the meter may automatically perform measurements and assess the test results (a positive/negative).

A very important safety element is the documentation and records of tested devices. The system of QR codes that may be printed immediately after the measurements, helps in keeping the records. Data stored in the code, by referring to the device and performed test, will accelerate the operational tests and facilitate the maintenance work.

PC software Sonel PAT Analysis allows user to read and store data from PAT meters, including the settings of devices. Basing on measurement data, the device generates test reports and a measurement schedule is kept, whereas a cloud-based solution provides:

- » smooth data management and transfer in real time,
- » work in a web browser,
- » work in the task ordering mode,
- » protection of staff and fleet,
- » and many more.

	First start-up and modifications	Tests after repair	Periodical tests	Type tests / procedural tests
	DIN VDE 0751:2001	DIN VDE 0701-0702 DIN VDE 0751:2001 EN 62353 IEC 60601 EN 50678:2020	DIN VDE 0701-0702 E-08400:1988 DIN VDE 0751:2001 British standards EN 62353 IEC 60601 EN 60974-4 EN 50699	DIN EN 60950/50116 EN 61010 DIN EN 60335/50106 EN 60745-1 IEC 60601
Equipment tested in compliance with standards				
Laboratory instruments		•	• • •	•
Measuring and inspection instruments		•	• • •	• •
Voltage-generating equipment	•	• •	•	•
Electric tools	•	• • •	•	• • •
Heating equipment	•	• •	•	•
Equipment with electrical drive	•	• • •	•	• •
Lighting lamps	•	• •	•	•
Multimedia and telecommunications devices	•	• •	•	•
Cable reels, extension cords, connector cables	•	• •	•	•
Data processing devices and office appliances	•	• •	• •	• •
Electrical equipment for medical applications, components of applications	•	• • •	• • •	•
Welding equipment			•	





PAT-96



PAT-95



PAT-10



PAT-2E



PAT-2

## MEASUREMENT FUNCTIONS

measurement of resistance of protective conductor (PE) using test current of 200 mA	•	•	•	•	•
measurement of resistance of protective conductor (PE) using test current of 10 A	•	•	•		
measurement of resistance of protective conductor (PE) using test current of 25 A	•	•			
measurement of insulation resistance using test voltage of 100 V	•	•			
measurement of insulation resistance using test voltage of 250 V	•	•	•	•	
measurement of insulation resistance using test voltage of 500 V	•	•	•	•	•
measurement of insulation resistance using test voltage of 1000 V	•	•			
measurement of substitute leakage current	•	•	•	•	•
measurement of PE leakage current	•	•			
measurement of differential leakage current	•	•	•	•	
measurement of touch leakage current	•	•	•	•	
power test	•	•			
test of IEC power cord	•	•	•	•	•
checking the resistance of L-N circuit	•	•			
measurement of voltage and frequency in networks	•	•	•	•	•
measurement of current consumption	•	•	•	•	•
autoranging	•	•	•	•	•
autotests	•	•	•	•	•
autotests with the option of describing them with the name of the standards or name set by user	•	•			
function of automatic measurement of RCD and PRCD parameters	•	•	PRCD	PRCD	
measurement of current using clamps	•	•			
SELV/PELV measurement	•	•			

## MEASUREMENTS OF WELDING APPLIANCES

measurement of rated voltage of welding appliances in unloaded state	•				
measurement of leakage current of welding circuit $I_L$	•				
measurement of primary leakage current $I_p$	•				
automatic three-lead insulation resistance measurement	•				

## COMMUNICATION WITH COMPUTER

communication with computer via USB	•	•	•	•	•
cooperation with software: Sonel Reader and Sonel PAT Analysis (optional)	•	•	•	•	•
configuration of measurements and meter settings using computer and the meter's interface			•	•	•
Wi-Fi	•	•	•	•	•
Bluetooth	•	•			
LAN	•	•			

## MEMORY

internal memory	•	•	•	•	•
cooperation with USB memory stick	•	•			
saving to memory along with initial description of examined appliances, location of measurements and data of client, assigning serial number and index to the measured appliance, capability of adding notes to the tested appliance, damage description	•	•	in mobile application	in mobile application	in mobile application
operation in Sonel QR system	•	•			

## USABLE FUNCTIONS

operating of QWERTY keyboard on a big and readable touchscreen with backlit	•	•			
help available on the screen - containing instructions on how to connect the tested appliance and perform the measurement	•	•			
cooperation with barcode scanner	•	•			
cooperation with printer	•	•	•	•	•
operation using internal battery	•	•	•	•	•

## SONEL PAT-96 / PAT-95

index: WMGBPAT96 / WMGBPAT95



### Basic functions of the tester:

- » PAT-96 | safety measurements of welding equipment
- » resistance measurement of protective conductor (protection class I) with current 200 mA, 10 A, 25 A,
- » insulation resistance measurement - four measurement voltages 100 V, 250 V, 500 V, 1000 V,
- » measurement of equivalent leakage current,
- » measurement of differential leakage current,
- » measurement of touch leakage current,
- » power measurement,
- » measurement of electricity consumption,
- » IEC cable test,
- » measurement of network voltage and frequency,
- » testing of RCD / PRCD parameters,
- » current measurement with clamp.

### Additional features:

- » automatic measurement procedures,
- » professional software for data processing and report generation,
- » supports barcode reader and printer,
- » supports USB flash drive storage devices,
- » ergonomic operation,
- » battery operation up to 1 hour.

### Electrical safety:

- » this product meets EMC requirements ..... in compliance with standard EN 61326-1 and EN 61326-2-2
- » type of insulation ..... CAT II 300 V according to EN 61010-1
- » housing protection rating according to EN 60529 ..... IP40

### Other technical specifications:

- » power supply of the meter ..... network: 95...265 V, 45...70 Hz  
..... battery: Ni-MH 7.2 V 2 Ah
- » load current ..... max. 16 A (230 V)
- » data transmission to PC computer ..... Bluetooth, Wi-Fi, LAN, USB
- » dimensions ..... 318 x 257 x 152 mm
- » meter weight ..... approx. 5 kg
- » elevation above sea level ..... <2000 m
- » display ..... LCD TFT 5" 1280 x 720

### Nominal operating conditions:

- » operating temperature range ..... -10...+50°C
- » storage temperature ..... -20...+70°C
- » humidity ..... 20...80%

### Standard accessories:

		PAT-96	PAT-95
Fuse 16 A, 250 V AC, 5 x 20 mm (2 pcs.)	WAP0ZB16PAT	1	1
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02	1	
Crocodile clip, blue, 1 kV, 20 A	WAKROBU20K02	1	
Test lead 1.8 m, orange (10 A / 25 A, terminated in a crocodile clip)	WAPRZ1X8ORKS	1	1
Double-wire test lead 1.5 m (PAT/banana plug)	WAPRZ1X5DZBB	1	
USB cable	WAPRZUSB	1	1
Mains cable with IEC C19 plug	WAPRZZAS1	1	1
L-11 carrying case	WAFUTL11	1	1
Factory calibration certificate		1	1

The meter is a part of the Sonel MeasureEffect™ platform. It is a comprehensive system that enables you to take measurements, store and manage data, and provides multi-level control of your instruments.



### PAT-96 | Safety measurements of welding equipment

#### Measurement of primary circuit leakage current $I_p$

Display range	Resolution	Accuracy
0.00...14.99 mA	0.01 mA	±(5% m.v. + 5 digits)

- » measurement meets the requirements of EN 60974-4

#### Measurement of welding circuit leakage current $I_L$

Display range	Resolution	Accuracy
0.00...14.99 mA	0.01 mA	±(5% m.v. + 5 digits)

- » measurement meets the requirements of EN 60974-4

#### Measurement of welding circuit voltage in a no-load state $U_0$

Display range	Resolution	Accuracy
5.0...240.0 V	0.1 V	±(2.5% m.v. + 5 digits)

- » voltage root mean square  $U_{RMS}$  measurement
- » voltage peak value  $U_{PEAK}$  measurement

#### Resistance measurement of protective earth conductor $I=200$ mA (protection class I)

Display range	Resolution	Accuracy
0.00...0.99 $\Omega$	0.01 $\Omega$	±(4% m.v. + 2 digits)
1.00...19.99 $\Omega$		±(4% m.v. + 3 digits)

- » measurement current:  $\geq 200$  mA for  $R = 0.2...1.99$   $\Omega$

#### Resistance measurement of protective earth conductor $I=10$ A (protection class I)

Display range	Resolution	Accuracy
0...999 m $\Omega$	1 m $\Omega$	±(3% m.v. + 4 digits)
1.00...1.99 $\Omega$	0.01 $\Omega$	

- » technical method of measurement ensuring high accuracy of obtained results
- » measurement current:  $\geq 10$  A for  $R \leq 0.5$   $\Omega$

#### Resistance measurement of protective earth conductor $I=25$ A (protection class I)

Display range	Resolution	Accuracy
0...999 m $\Omega$	1 m $\Omega$	±(3% m.v. + 4 digits)
1.00...1.99 $\Omega$	0.01 $\Omega$	

- » technical method of measurement ensuring high accuracy of obtained results
- » measurement current:  $\geq 25$  A for:
  - $U_{L-N} > 180$  V and  $R \leq 0.2$   $\Omega$
  - $U_{L-N} \leq 180$  V and  $R \leq 0.1$   $\Omega$

## Measurement of insulation resistance

Measuring range according to IEC 61557-2 for:

Un=100 V: 100 kΩ...99.9 MΩ

Un=250 V: 250 kΩ...199.9 MΩ

Un=500 V: 500 kΩ...599.9 MΩ

Un=1000 V: 1 MΩ...599.9 MΩ

U <sub>a</sub> displayed	Display range	Resolution	Accuracy
100 V	0...1999 kΩ	1 kΩ	±(5% m.v. + 8 digits)
	2.00...19.99 MΩ	0.01 MΩ	
	20.0...99.9 MΩ	0.1 MΩ	
250 V	0...1999 kΩ	1 kΩ	
	2.00...19.99 MΩ	0.01 MΩ	
	20.0...199.9 MΩ	0.1 MΩ	
500 V	0...1999 kΩ	1 kΩ	
	2.00...19.99 MΩ	0.01 MΩ	
	20.0...599.9 MΩ	0.1 MΩ	
1000 V	0...1999 kΩ	1 kΩ	
	2.00...19.99 MΩ	0.01 MΩ	
	20.0...599.9 MΩ	0.1 MΩ	

- » automatic discharge of the measured object's capacitance upon completion of measurement
- » protection against measurement of live objects
- » max. output current 1.4 mA

## Measurement of leakage current

PE leakage current and differential leakage current

Display range	Resolution	Accuracy
0.00...3.99 mA	0.01 mA	±(5% m.v. + 2 digits)
4.0...19.9 mA	0.1 mA	

- » at half of the measurement time, the meter automatically changes the polarity of the measuring network socket and displays a greater value

## Equivalent leakage current

Display range	Resolution	Accuracy
0.00...3.99 mA	0.01 mA	±(5% m.v. + 2 digits)
4.0...19.9 mA	0.1 mA	

- » open-circuit voltage: 25...50 V

## Touch leakage current

Display range	Resolution	Accuracy
0.000...4.999 mA	0.001 mA	±(5% m.v. + 3 digits)

## Testing of RCD / PRCD parameters

RCD trip test and measurement of tripping time  $t_A$

RCD type	Factor	Range	Resolution	Accuracy
General	0.5 I <sub>Δn</sub>	0...300 ms	1 ms	±(2% m.v. + 2 digits)*
	1 I <sub>Δn</sub>			
	2 I <sub>Δn</sub>	0...150 ms		
	5 I <sub>Δn</sub>	0...40 ms		

\*for RCD of I<sub>Δn</sub> = 10 mA and the measurement 0.5 I<sub>Δn</sub> error: ± (2% m.v. + 3 digits)

## Measurement of RCD trip current I<sub>A</sub> for sinusoidal residual current

Measuring range according to IEC 61557: (0.3...1.0)I<sub>Δn</sub>

Nominal current	Measuring range	Resolution	Measurement current	Accuracy
10 mA	3.0...10.0 mA	0.1 mA	0.3 I <sub>Δn</sub> ...1.0 I <sub>Δn</sub>	± 5% I <sub>Δn</sub>
15 mA	4.5...15.0 mA			
30 mA	9.0...30.0 mA			

- » measurement can be started from a positive or negative half-period of the input leakage current
- » max. measurement current flow time 3200 ms

## Power test

Apparent power S measurement

Display range	Resolution	Accuracy
0...999 VA	1 VA	±(5% m.v. + 3 digits)
1...3.99 kVA	0.01 kVA	

## Active power P measurement

Display range	Resolution	Accuracy
0...999 W	1 W	±(5% m.v. + 3 digits)
1.00 k...3.99 kW	0.01 kW	

## Reactive power Q measurement

Display range	Resolution	Accuracy
0...999 var	1 var	±(5% m.v. + 3 digits)
1.00 k...3.99 kvar	0.01 kvar	

## PF power factor

Display range	Resolution	Accuracy
0.00...1.00	0.01	±(10% m.v. + 5 digits)

## Cosφ factor

Display range	Resolution	Accuracy
0.00i...1.00i	0.01	±(5% m.v. + 5 digits)
0.00c...1.00c		

## Current measurement

Display range	Resolution	Accuracy
0.00...15.99 A	0.01 A	±(2% m.v. + 3 digits)

## Voltage measurement

Display range	Resolution	Accuracy
95.0...265.0 V	0.1 V	±(2% m.v. + 2 digits)

## Current measurement with clamp

Display range	Resolution	Accuracy
100 mA...999 mA	1 mA	±(5% m.v. + 5 digits)
1.00 A...9.99 A	0.01 A	
10.0 A...24.9 A	0.1 A	

- » The accuracy given in the table does not account for the accuracy of the measuring clamp

## THD of voltage and current

Display range	Resolution	Accuracy
0.0...999.9%	0.1%	±(5% m.v. + 5 digits)

## The instruments enable measurements in compliance with:

- » EN 50678:2020 General requirements for safety testing of electrical equipment after repair.
- » EN 50699:2021 Recurrent tests of electrical equipment.
- » EN 60745-1 Hand-held motor-operated electric tools. Safety. Part 1: General requirements.
- » EN 61029 Safety of transportable motor-operated electric tools. General requirements.
- » EN 60335-1 Household and similar electrical appliances. Safety. General requirements.
- » EN 60950 Safety of information technology equipment.
- » EN 61557-6 Electrical safety in low voltage distribution systems up to 1000 V a.c. and 1500 V d.c. - Equipment for testing, measuring or monitoring of protective measures - Part 6: Effectiveness of residual current devices (RCD) in TT, TN and IT systems.
- » VDE 0404-1 Prüf- und Messeinrichtungen zum Prüfen der elektrischen Sicherheit von elektrischen Geräten. Teil 1: Allgemeine Anforderungen.
- » VDE 0404-2 Prüf- und Messeinrichtungen zum Prüfen der elektrischen Sicherheit von elektrischen Geräten. Teil 2: Prüfeinrichtungen für Prüfungen nach Instandsetzung, Änderung oder für Wiederholungsprüfungen.
- » VDE 0701-0702 Prüfung nach Instandsetzung, Änderung elektrischer Geräte. Wiederholungsprüfung elektrischer Geräte. Allgemeine Anforderungen für die elektrische Sicherheit.
- » AS/NZS 3760:2010 In-service safety inspection and testing of electrical equipment.



## SONEL PAT-10 / PAT-2E / PAT-2

index: WMGBPAT10 / WMGBPAT2E / WMGBPAT2



CAT II

300 V

IP40

### Features

Innovative combination of **small overall dimensions** (and the transportability of the device related to this) with **advanced measurement systems** allowing for complete performance of automatic measurements for electrical devices as well as IEC cables and extension cords (including those with PRCD).

Complete set of tests performed after just one press of the START button. The meter's configuration capabilities allow for modification of the method of the instrument's operation, which makes it **even better adapted to the user's needs**. In situations where it is necessary to perform unit measurements without the need to perform the entire, complex measurement procedure, PATs from Sonel enable **operation in single measurement mode** (of a given type - so-called manual measurements).

All meters in this series additionally enable performance of **basic measurements without an external power source**, in emergency situations where there is no network power, simplified test sets can be initiated in battery operating mode.

Small overall dimensions, light weight and a specially designed carrying case for the meter and accessories provide **convenience** of use and **high mobility of the instrument**. Wireless communication with a printer allows for organization of the location where measurements are performed without a tangle of unnecessary cables. Saving of results to memory and integration of results in PC software additionally broaden the instrument's functionality.

### Basic functions of the PAT-10 instrument

- » diode indicating result assessment,
- » quick access to measurement procedures,
- » compact housing, ergonomic carrying case,
- » automatic selection of measuring ranges,
- » resistance measurement of protective conductor with current: 200 mA, 10 A.
- » measurement of insulation resistance.
- » measurement of PRCD trip time.
- » measurement of equivalent, differential and touch leakage current,
- » IEC cable test,
- » saving of results to memory,
- » compatibility with Sonel Reader and Sonel PAT Analysis software (optional),
- » cooperation with the Sonel PAT Analysis Mobile application.



### Standard accessories

Fuse 16 A, 250 V AC, 5 x 20 mm (2 pcs.) (only PAT-10, PAT-2E)	WAPOZB16PAT
M8 carrying case	WAFUTM8
Test lead 1.2 m, red, 1 kV (terminated in a crocodile clip)	WAPRZ1X2REBK
USB cable	WAPRZUSB
Mains cable with IEC C19 plug	WAPRZZAS1
Factory calibration certificate	

### The instrument can be used for tests of equipment, including tests compliant with standards:

- » EN 50699:2021 Recurrent tests of electrical equipment
- » EN 60745 - 1: Hand-held motor-operated electric tools. Safety. Part 1: General requirements.
- » EN 61029: Safety of transportable motor-operated electric tools. General requirements.
- » EN 60335 - 1: Household and similar electrical appliances. General requirements.
- » EN 60950: Safety of information technology equipment.
- » EN 61557-6 Electrical safety in low voltage distribution systems up to 1000 V a.c. and 1500 V d.c. - Equipment for testing, measuring or monitoring of protective measures - Part 6: Effectiveness of residual current devices (RCD) in TT, TN and IT systems.
- » VDE 0701-0702 Prüfung nach Instandsetzung, Änderung elektrischer Geräte. Wiederholungsprüfung elektrischer Geräte. Allgemeine Anforderungen für die elektrische Sicherheit.

Model	PAT-10	PAT-2E	PAT-2
Visual assessment	✓	✓	✓
Resistance measurement of protective earth conductor I = 200 mA	0.01...19.99 Ω	0.01...19.99 Ω	0.01...19.99 Ω
Resistance measurement of protective earth conductor I = 10 A	0.01...1.99 Ω	-	-
Insulation resistance measurement U = 250 V	0.25...99.9 MΩ	0.25...99.9 MΩ	-
Insulation resistance measurement U = 500 V	0.50...99.9 MΩ	0.50...99.9 MΩ	0.50...99.9 MΩ
Measurement of substitute leakage current	0.01...19.9 mA	0.01...19.9 mA	0.01...19.9 mA
Measurement of touch leakage current	0.001...4.999 mA	0.001...4.999 mA	-
Measurement of differential leakage current	0.10...19.9 mA	0.10...19.9 mA	-
IEC cable test ( $R_{iso}$ , $R_{pe}$ , polarity)	✓	✓	✓
PRCD test (tripping time for $I_{\Delta n}$ ; x1/x5; 0° and 180°)	10 mA, 30 mA	10 mA, 30 mA	-
Built-in memory for results / transmission to computer	✓	✓	✓
Wi-Fi	✓	✓	✓
Compatible with printer	✓	✓	✓
Meter configuration from computer	✓	✓	✓
Power supply	Network power supply: 220 V; 230 V; 240 V 50/60 Hz Built-in rechargeable battery	Network power supply: 220 V; 230 V; 240 V 50/60 Hz Built-in rechargeable battery	Built-in rechargeable battery (measurements can be performed during charging)
Measurement category CAT II 300V	✓	✓	✓
Weight	approx. 1.40 kg	approx. 1.40 kg	approx. 1.40 kg
Dimensions	200 x 180 x 77 mm	200 x 180 x 77 mm	200 x 180 x 77 mm


## SONEL PAT ANALYSIS MOBILE



The mobile application expands the capabilities of Sonel PAT-10, PAT2E and PAT-2 testers. Sonel PAT Mobile is available on Android system.

Sonel PAT Analysis Mobile:

- » connects wirelessly to the selected tester,
- » downloads measurement results,
- » saves results to the PAT structure (customer, appliances, measurement data),
- » prints reports,
- » reads PAT system QR codes,
- » ensures full compatibility with the Sonel QR code system and the object-oriented memory structure,
- » sends data via the Internet.

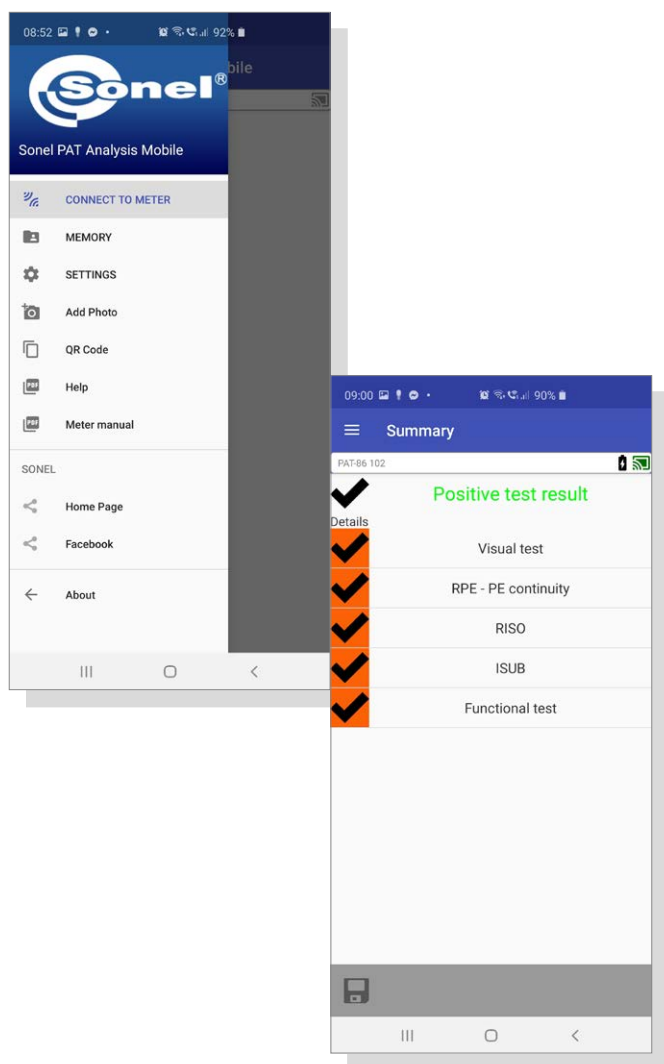


## SONEL PAT ANALYSIS

index: WAPROSONPAT3

This software is intended for companies that perform safety measurements of electrical equipment.


Applications are compatible with Sonel PAT-series testers. Data saved by the meter is entered into the test report for the selected item of equipment.

- » Perfect for production plants, electrical tool rental services, repair and maintenance services, etc.
- » Hierarchical data entry structure - a device is assigned to a specific company or department.
- » Capability of gathering information about a given piece of equipment.
- » Tracking the test history of a device.
- » Label printing on standard adhesive papers.
- » Capability of creating a custom measurement standard using the report editor.
- » Capability of scheduling measurements - every device contains a "Measurement cycle" list - the application automatically displays devices whose testing deadline is approaching or has expired.
- » It enables remote sending a measurement procedure to the PAT-9x meter.

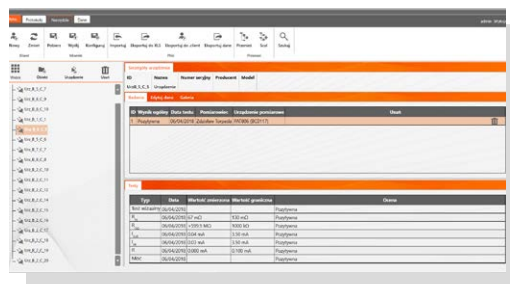

### Available report forms:

- » full report on one test - on an A4 page, with complete data about the device and a complete series of tests,
- » test history for device - all measurement results are printed according to defined criteria (from a given period),
- » abbreviated report/record sheet - prints the test history with basic information about the device and information on approval for use.

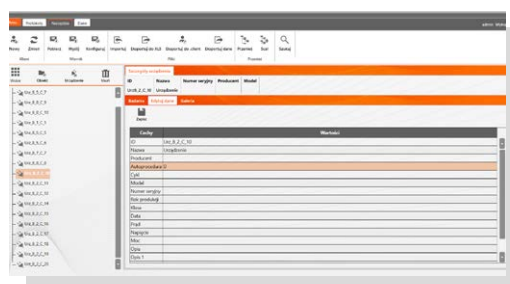

### Report printing according to the following standards:

EN 50699, EN 50678, VDE 0701:1, VDE 0701:200, VDE 0701:240, VDE 0701:260, DIN VDE 0702, EN 61010, EN 60335, EN 60950, IEC 60601, EN62353

### System requirements:

- » Operating system: Windows 10
- » Minimum resolution: 1024x768
- » Recommended resolution: 1920x1080

## PAT

Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	PAT-96	PAT-95	PAT-10	PAT-2E	PAT-2
	PAT-3F-PE adapter for leakage current testing	WAADAPAT3FPE	•				
	Adapter for an industrial socket 16 A	WAADAPAT16F1	•	•	•	•	•
	Adapter for an industrial socket 32 A	WAADAPAT32F1	•	•	•	•	•
	Adapter for three-phase socket 16 A (5P)	WAADAPAT16P	•	•	•	•	•
	Adapter for three-phase socket 16 A Switchable (5P)	WAADAPAT16PR	•	•	•	•	•
	Adapter for three-phase socket 32 A (5P)	WAADAPAT32P	•	•	•	•	•
	Adapter for three-phase socket 32 A switchable (5P)	WAADAPAT32PR	•	•	•	•	•
	Adapter for three-phase socket 16 A (4P)	WAADAPAT16C	•	•	•	•	•
	Adapter for three-phase socket 16 A switchable (4P)	WAADAPAT16CPR	•	•	•	•	•
	Adapter for three-phase socket 32 A (4P)	WAADAPAT32C	•	•	•	•	•
	Adapter for three-phase socket 32 A switchable (4P)	WAADAPAT32CPR	•	•	•	•	•
	Battery for D3 Brother printer	WAAKU19	•	•	•	•	•
	Fuse 5 x 20 mm, 16 A (2 pcs.)	WAP0ZB16PAT	1	1	1	1	
	C-3 current clamp (Ø52 mm)	WACEGC30KR	•	•			
	Barcode scanner 2D (USB)	WAADACK2D	•	•			
	Portable report / barcode printer D2 SATO (USB, portable)	WAADAD2	•	•			
	Portable report / barcode printer D3 Brother (Wi-Fi / USB, portable)	WAADAD3	•	•	•	•	•
	L11 carrying case	WAFUTL11	1	1			
	M8 carrying case	WAFUTM8			1	1	1
	Crocodile clip red 1 kV 20 A	WAKRORE20K02	1	•	•	•	•

Photo	Name	Index	PAT-96	PAT-95	PAT-10	PAT-2E	PAT-2
	Crocodile clip blue 1 kV 20 A	WAKROBU20K02	1	•			
	Kelvin clamp 1 kV, 25 A	WAKROKELK06	•	•			
	IEC Test adapter (Shuko)	WAADAPATIEC1	•	•	•	•	•
	IEC C6 to C13 adapter	WAADAPATIEC2	•	•	•	•	•
	Test lead 1.2 m, red, 1 kV (2.5 mm2, banana plugs)	WAPRZ1X2REBB2X5				•	•
	Test lead 1.2 m, red, 1 kV (terminated in a crocodile clip)	WAPRZ1X2REBK			1	1	1
	Test lead 1.8 m, orange, (10 A / 25 A, terminated in a crocodile clip)	WAPRZ1X8ORKS	1	1			
	Double-wire test lead 2.1 m (IEC C13 / banana plug)	WAPRZ2X1DZIECB	•	•			
	Double-wire test lead 1.5 m (PAT/banana plug)	WAPRZ1X5DZBB	1	•			
	USB cable	WAPRZUSB	1	1	1	1	1
	Mains cable with IEC C19 plug	WAPRZZAS1	1	1	1	1	1
	Pin probe, red 1 kV (banana socket)	WASONREOGB1	•	•	•	•	•
	Pin probe, blue 1 kV (banana socket)	WASONBUOGB1	•	•			
	Brush probe	WASONSZ1			•	•	•
	High-current pin probe 1 kV (banana sockets)	WASONSPGB1	•	•			
	Label Roll – Black on White for D2 SATO (with glue)	WANAKD2	•	•			
	Ribbon for D2 SATO printer	WANAKD2BAR	•	•			
	Label Roll – Black on White for D3 Brother (with glue)	WANAKD3	•	•	•	•	•
	PC software: Sonei PAT Analysis	WAPROSONPAT3	•	•	•	•	•
	PC software: Sonei Reader	WAPROREADER	•	•	•	•	•





## Clamp meters

CMP-3000

CMP-3kR

CMP-2000

CMP-200F

CMP-1015-PV

CMP-200

CMP-1010

CMP-100

CMP-403

CMP-402



## Digital multimeters


CMM-60

CMM-40

CMM-30

CMM-11

CMM-10



## Voltage testers

P-6

P-5

P-4

VT-3

VT-2



...and much more  
distance meter  
phase rotation testers



## Voltage adapter

### SONEL AHV-3

index: WAADAAHV3



The Sonel AHV-3 adapter enables high voltage measurement in accordance with CAT III 3000 V DC in combination with the dedicated Sonel CMP-1015-PV clamp meter or compatible CMM and CMP series meters.

Standard accessories:


- » 2x pin probe 3 kV DC (banana socket) black
- » test leads set for CMM/CMP (banana plugs)
- » M13 carrying case



## Mounting adapter for AHV-3

index: WAPOZUCH13

It is used to attach the AHV-3 adapter to the clamps of the CMP-1015-PV meter.

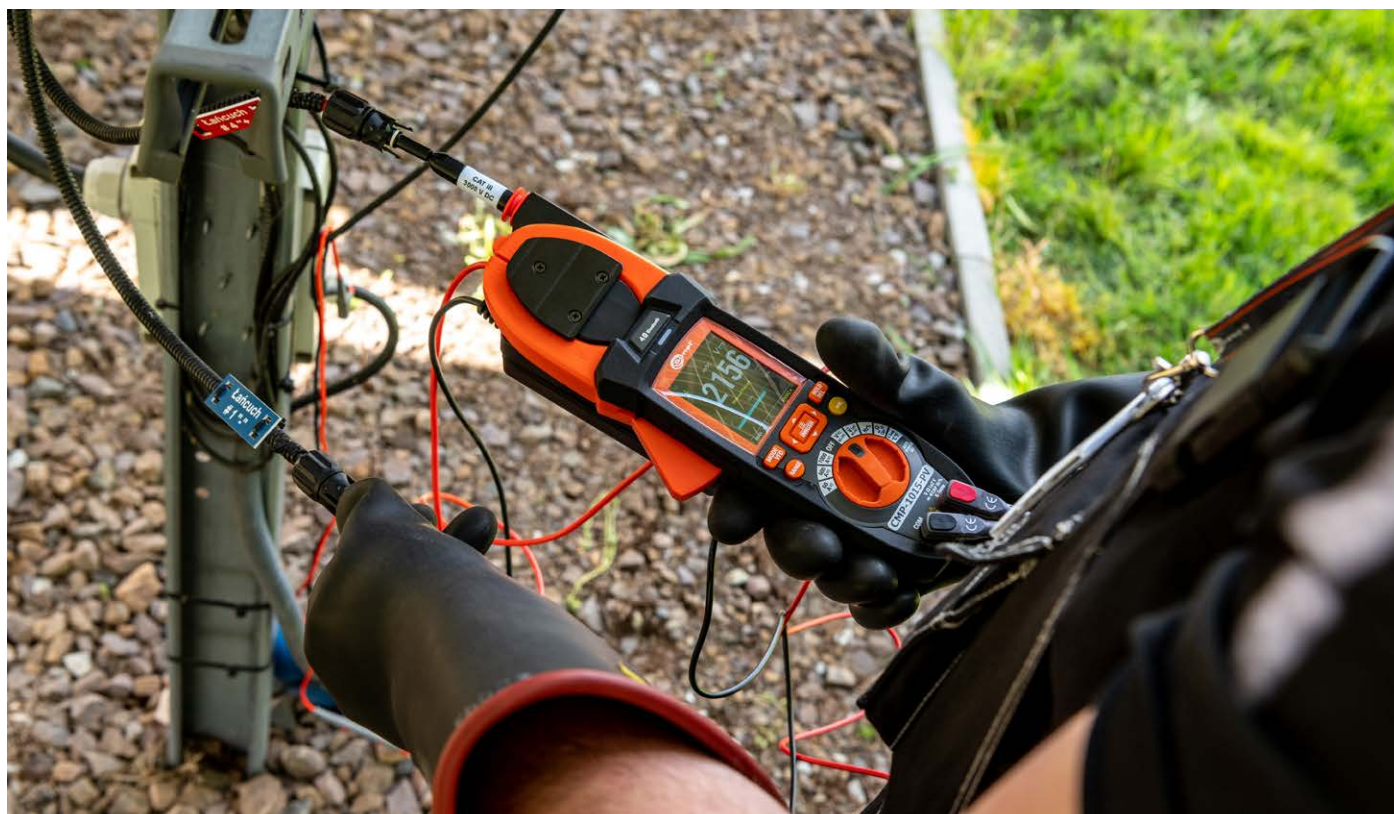



### Line splitter

## SONEL AC-16

index: WAADAAC16

- » ratio x1, x10
- » maximum voltage: 230 V AC
- » maximum current: 16 A
- » the adapter can be applied with any type of clamp meter



### Universal magnetic hanging strap

index: WAPOZUCH6

Universal magnetic holder for mounting the meter to metal surfaces, e.g. switchgear doors.



### Crocodile clip mini, set, 1 kV 10 A

index: WAKROKPL10MINI

Crocodile clips for mounting on the probe's blades with a diameter of 2 mm, used in CMM and CMP multimeters.



## SONEL MULTIMETER MOBILE



**Sonel Multimeter Mobile** application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. Currently the application supports **CMP-3000**, **CMP-1015-PV**, **CMP-3kR**, **CMM-60**, **CMM-30** and **CMM-11** multimeters. It can be downloaded from **Google Play**.

The application enables:

- » reading the multimeter's measurement results in live mode, thanks to Bluetooth wireless data transfer,
- » saving results as a project and complete it with notes and photos from measurement places,
- » reading saved results in two forms: list with date and hour of the measurement, as well as in form of a chart for easier analysis of changes and distortions.

Additional application features i.a.:

- » setting sampling rate and duration of the measurement,
- » setting upper and lower limit with acoustic signal in case of exceeding the set limits,
- » controlling measurement subfunctions, i.e. MAX/MIN, REL or RANGE,
- » fast access to the instrument's website,
- » sending data via e-mail,
- » possibility of saving data to .csv file.



## Comparison of clamp multimeters



**CMP-3000**  
High-end model  
for industry area



**CMP-2000**  
High-end model  
for industry area



**CMP-1015-PV**  
High-end model  
for photovoltaics and industry area



**CMP-1010**  
Various applications  
in industry



**CMP-403**  
For general use

	CMP-3000	CMP-2000	CMP-1015-PV	CMP-1010	CMP-403
	High-end model for industry area	High-end model for industry area	High-end model for photovoltaics and industry area	Various applications in industry	For general use
<b>Measurement functions</b>					
AC/DC voltage	1000 V / 1000 V	750 V / 1000 V	1000 V / 1500 V	1000 V / 1000 V	1000 V / 1000 V
AC/DC current	3000 A / 1000 A	1500 A / 2000 A	1000 A / 1000 A	1000 A / 1000 A	400.0 A / 400.0 A
Resistance	40.000 MΩ	60.00 MΩ	60.00 MΩ	60.00 MΩ	40.00 MΩ
Frequency	50.000 MHz	1.000 MHz	10.00 MHz	99.99 kHz	current: 999.9 Hz voltage: 99.99 kHz
Capacitance	5.0000 mF	6.599 mF	100.0 mF	100.0 mF	99.99 mF
Temperature	1000°C	1000°C	1000°C	1000°C	1000°C
Non-contact voltage indication	✓	-	✓	✓	✓
Duty cycle (%)	✓	✓	✓	✓	✓
Continuity / diode test	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Current and voltage measurements downstream the inverter, frequency converter or in the VFD system	-	-	✓	✓	✓
High voltage DC measurement (HVDC)	-	-	✓	-	-
Inrush current	✓	✓	✓	✓	✓
Low Z	-	-	✓	✓	-
<b>Basic features</b>					
True RMS measurement	✓	✓	✓	✓	✓
Automatic / manual range selection	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Maximum diameter of measured conductor	hard clamp: 48 mm flexible clamp: 160 mm	57 mm (conductor) 70 x 18 mm (bus bar)	48 mm	35 mm	30 mm
Input impedance	10 MΩ	10 MΩ	9 MΩ (AC) 10 MΩ (DC)	10 MΩ	10 MΩ
<b>Advanced features</b>					
MAX / MIN / AVG measurement	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	-	- / - / -
HOLD	✓	✓	✓	✓	✓
PEAK HOLD	-	-	✓	-	-
PEAK MIN / PEAK MAX	-	-	-	✓ / ✓	✓ / ✓
AC+DC	-	-	✓	-	-
Relative measurement	✓	✓	✓	✓	✓
Recorder	-	-	✓	-	-
Memory	in mobile app	-	✓	-	-
Bluetooth	✓	-	✓	-	-
Sonei Multimeter Mobile	✓	-	✓	-	-
<b>Other features</b>					
Automatic power down	✓	✓	✓	✓	✓
Battery indicator	✓	✓	✓	✓	✓
Beeper	✓	✓	✓	✓	✓
Dimensions	230 x 76 x 40 mm	281 x 108 x 53 mm	273 x 96 x 48 mm	250 x 90 x 40 mm	220 x 80 x 39 mm
Weight	501 g	570 g	490 g	329 g	270 g
<b>Display</b>					
Graphical	-	-	✓	-	-
Segmented	✓	✓	-	✓	✓
Counting	50000, 4 4/5 digits	6600, 3 4/5 digits	6000	6000	4000
Screen backlit	✓	✓	✓	✓	✓
<b>Safety and conditions of use</b>					
Measurement category (EN 61010)	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V III 1000 V	CAT III 600 V CAT II 1000 V
Ingress protection	IP40	IP20	IP40	IP30	IP30
Operating temperature	5...40°C	0...50°C	5...40°C	5...40°C	5...40°C



	<b>CMP-402</b> For general use	<b>CMP-3kR</b> Recording currents	<b>CMP-200F</b> For general use	<b>CMP-200</b> Leakage current	<b>CMP-100</b> Leakage current	
	<b>Measurement functions</b>					
	1000 V / 1000 V	-	1000 V / 1000 V	- / -	- / -	AC/DC voltage
	400.0 A / -	3000 A / -	200.0 A / -	200 A / -	100.0 A / -	AC/DC current
	40.00 MΩ	-	60.00 MΩ	-	-	Resistance
	current: 999.9 Hz voltage: 99.99 kHz	100.0 Hz	-	-	-	Frequency
	99.99 mF	-	4000 μF	-	-	Capacitance
	1000°C	-	-	-	-	Temperature
	✓	-	✓	-	-	Non-contact voltage indication
	✓	-	-	-	-	Duty cycle (%)
	✓ / ✓	-	✓ / ✓	-	-	Continuity / diode test
	✓	-	-	-	-	Current and voltage measurements downstream the inverter, frequency converter or in the VFD system
	-	-	-	-	-	High voltage DC measurement (HVDC)
	✓	✓	-	-	-	Inrush current
	-	-	✓	-	-	Low Z
	<b>Basic features</b>					
	✓	✓	✓	-	✓	True RMS measurement
	✓ / ✓	✓ / ✓	✓ / ✓	- / ✓	- / ✓	Automatic / manual range selection
	30 mm	flexible clamp: 160 mm	16 mm	30 mm	40 mm	Maximum diameter of measured conductor
	10 MΩ	-	10 MΩ	-	-	Input impedance
	<b>Advanced features</b>					
	- / - / -	- / - / -	✓ / ✓ / -	✓ / - / -	- / - / -	MAX / MIN / AVG measurement
	✓	✓	✓	✓	✓	HOLD
	-	-	-	-	✓	PEAK HOLD
	✓ / ✓	-	-	-	-	PEAK MIN / PEAK MAX
	-	-	-	-	-	AC+DC
	✓	-	-	-	-	Relative measurement
	-	✓	-	-	-	Recorder
	-	✓	-	-	-	Memory
	-	✓	-	-	-	Bluetooth
	-	✓	-	-	-	Sonel Multimeter Mobile
	<b>Other features</b>					
	✓	✓	✓	✓	✓	Automatic power down
	✓	✓	✓	✓	✓	Battery indicator
	✓	-	✓	-	-	Beeper
	220 x 80 x 39 mm	150 x 65 x 35 mm	230 x 44 x 66 mm	182 x 61 x 34 mm	234 x 82 x 46 mm	Dimensions
	266 g	240 g	270 g	225 g	357 g	Weight
	<b>Display</b>					
	-	-	-	-	-	Graphical
	✓	✓	✓	✓	✓	Segmented
	4000	3000, 3 digits	6000, 3 4/5 digits	1999, 3 1/2 digits	6000	Counting
	✓	✓	✓	✓	✓	Screen backlit
	<b>Safety and conditions of use</b>					
	CAT III 600 V CAT II 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT II 600 V	CAT III 300 V CAT II 600 V	Measurement category (EN 61010)
	IP30	IP40	IP40	IP40	IP30	Ingress protection
	5...40°C	5...40°C	5...40°C	0...50°C	5...40°C	Operating temperature

## Clamp meter

# SONEL CMP-3000

index: WMGBCMP3000



- INRUSH CURRENT
- CAT IV 600 V
- CAT III 1000 V
- IP40
- FLEXIBLE CLAMP
- BUILT IN FLASHLIGHT
- BLUETOOTH

### Standard accessories:

Flexible clamp F-16	WACEGF16
Set of test leads (CAT IV, M)	WAPRZCMM2
Type K temperature probe adapter	WAADATEMK
Temperature measurement probe (type K)	WASONTEMK
9 V battery	
Carrying case	
Factory calibration certificate	

### Product features

- » True RMS AC voltage and current measurement for accurate and reliable readings of non-sinusoidal signals
- » INRUSH function for measuring current drawn by an electrical device when first turned on
- » flexible clamp allow the measurement of conductors up to 160 mm in diameter
- » large clamp allows the measurement of conductors up to 48 mm in diameter
- » current measurement up to 1000 A DC and 3000 A AC
- » temperature measurement in Fahrenheit and Celsius
- » non-contact voltage indication
- » automatic selection of measuring ranges
- » HOLD function, allowing for freezing the result on the display
- » holding of MAX/MIN results
- » automatic power down - Auto-OFF function

### Direct current measurement

Display range	Resolution	Accuracy
0.0...1000.0 A	0.1 A	±(2.5% m.v. + 5 digits)

### Alternating current measurement (True RMS)

Display range	Resolution	Accuracy
0.0...1000.0 A	0.1 A	±(2.8% m.v. + 8 digits) for 50...400 Hz
0.0...3000.0 A*		

\*measurement with the use of flexible clamp

### Direct voltage measurement

Display range	Resolution	Accuracy
0.000...500.00 mV	0.01 mV	±(0.1% m.v. + 4 digits)
0.5001...5.0000 V	0.0001 V	
5.001...50.000 V	0.001 V	
50.01...500.00 V	0.01 V	
500.1...1000.0 V	0.1 V	±(0.2% m.v. + 5 digits)



## SONEL MULTIMETER MOBILE

Sonel Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from Google Play.

### Alternating voltage measurement (True RMS)

Display range	Resolution	Accuracy
0.000...500.00 mV	0.01 mV	±(0.1% m.v. + 9 digits)
0.5001...5.0000 V	0.0001 V	
5.001...50.000 V	0.001 V	
50.01...500.00 V	0.01 V	
500.1...1000.0 V	0.1 V	

### Resistance measurement

Display range	Resolution	Accuracy
0.0...500.00 Ω	0.01 Ω	±(1.0% m.v. + 9 digits)
0.5001...5.0000 kΩ	0.0001 kΩ	±(1.0% m.v. + 4 digits)
5.001...50.000 kΩ	0.001 kΩ	
50.01...500.00 kΩ	0.01 kΩ	
0.5001...5.0000 MΩ	0.0001 MΩ	±(2.0% m.v. + 9 digits)
5.001...50.000 MΩ	0.001 MΩ	±(3.0% m.v. + 10 digits)

### Capacitance measurement

Display range	Resolution	Accuracy
0.0...500.00 nF	0.01 nF	±(3.5% m.v. + 40 digits)
0.5001...5.0000 μF	0.0001 μF	±(3.5% m.v. + 9 digits)
5.001...50.000 μF	0.001 μF	
50.01...500.00 μF	0.01 μF	
500.1...5000.0 mF	0.1 mF	±(5.0% m.v. + 9 digits)

### Frequency measurement

Display range	Resolution	Accuracy
10...50.000 Hz	0.001 Hz	±(0.3% m.v. + 2 digits)
50.01...500.00 Hz	0.01 Hz	
0.5001...5.0000 kHz	0.0001 kHz	
5.001...50.000 kHz	0.001 kHz	
50.01...500.00 kHz	0.01 kHz	
0.5001...5.0000 MHz	0.0001 MHz	
5.001...50.000 MHz	0.001 MHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
5...95%	0.1%	±(1.0% m.v. + 2 digits)

- » frequency range: 10 Hz...10 kHz.

### Temperature measurement

Display range	Resolution	Accuracy
-100.0...+1000°C	1°C or 1°F	±(1.0% m.v. + 2°C)
-148...+1832°F	1°C or 1°F	±(1.0% m.v. + 3.6°F)

"m.v." = "measured value"

### Other technical specifications:

- » display ..... segment LCD, readout of 50000 readings, 4 4/5 digits, backlit
- » power supply ..... 9 V battery, type 6LR61
- » indication of range overflow ..... 'OL' symbol is displayed
- » maximal wire diameter ..... 160 mm
- » maximal busbar diameter ..... 500 mm
- » continuity test ..... threshold 50 Ω
- » diode test ..... I = 0.3 mA, U<sub>0</sub> = 2.8 V DC
- » sampling rate ..... nominal: 2 Hz
- » input impedance
  - V AC ..... >9.5 MΩ
  - V DC ..... ≥10 MΩ
- » auto-off timeout ..... 30 min
- » operating temperature ..... 5...40°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 230 x 76 x 40 mm
- » flexible clamp dimensions ..... 140 x 180 mm
- » weight ..... 501 g
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001



## Clamp meter

# SONEL CMP-2000

index: WMGBCMP2000



### Standard accessories:

Set of test leads for CMM/CMP	WAPRZCMP1
Temperature measurement probe (type K)	WASONTEMK
9 V battery	
Standard carrying case	
Factory calibration certificate	

### Product features

- » True RMS AC voltage and current measurement for accurate and reliable readings of non-sinusoidal signals
- » **INRUSH** function for measuring current drawn by an electrical device when first turned on
- » **large clamps** allow the measurement of conductors up to **57 mm** in diameter
- » current measurement **up to 2000 A DC** and **1500 A AC**
- » temperature measurement in **Fahrenheit and Celsius**
- » automatic selection of measuring ranges
- » **HOLD** function, allowing for freezing the result on the display
- » holding of **MAX/MIN** results
- » **Delta ZERO** function, relative measurement mode for direct current - capability of zeroing the instrument at any time and returning to measurement in absolute mode
- » **double LCD** to display more than one value at the same time
- » automatic power down - **Auto-OFF** function

### Direct current measurement

Display range	Resolution	Accuracy (AC)
0.0...659.9 A	0.1 A	$\pm(2.0\% \text{ m.v.} + 5 \text{ digits})$
660...2000 A	1 A	$\pm(3.0\% \text{ m.v.} + 5 \text{ digits})$ for 660...1000 A $\pm(5.0\% \text{ m.v.} + 5 \text{ digits})$ for 1000...2000 A

### Alternating current measurement (True RMS)

Display range	Resolution	Accuracy
0.0...659.9 A	0.1 A	$\pm(2.0\% \text{ m.v.} + 10 \text{ digits})$ for 50...60 Hz $\pm(3.0\% \text{ m.v.} + 10 \text{ digits})$ for 61...400 Hz
660...1500 A	1 A	$\pm(2.5\% \text{ m.v.} + 10 \text{ digits})$ for 50...60 Hz and 660...1000 A $\pm(3.5\% \text{ m.v.} + 10 \text{ digits})$ for 61...400 Hz and 660...1000 A $\pm(5.0\% \text{ m.v.} + 10 \text{ digits})$ for 50...400 Hz and 1000...1500 A

### Direct voltage measurement

Display range	Resolution	Accuracy
0.000...6.599 V	0.001 V	$\pm(0.5\% \text{ m.v.} + 2 \text{ digits})$
6.60...65.99 V	0.01 V	
66.0...659.9 V	0.1 V	
660...1000 V	1 V	

### Alternating voltage measurement (True RMS)

Display range	Resolution	Accuracy
0.000...6.599 V	0.001 V	$\pm(1.5\% \text{ m.v.} + 8 \text{ digits})$ for 50...500 Hz
6.60...65.99 V	0.01 V	
66.0...659.9 V	0.1 V	
660...750 V	1 V	

### Resistance measurement

Display range	Resolution	Accuracy
0.0...659.9 $\Omega$	0.1 $\Omega$	$\pm(1.0\% \text{ m.v.} + 5 \text{ digits})$
0.660...6.599 k $\Omega$	0.001 k $\Omega$	
6.60...65.99 k $\Omega$	0.01 k $\Omega$	
66.0...659.9 k $\Omega$	0.1 k $\Omega$	
0.660...6.599 M $\Omega$	0.001 M $\Omega$	$\pm(2.0\% \text{ m.v.} + 5 \text{ digits})$
6.60...66.00 M $\Omega$	0.01 M $\Omega$	$\pm(3.5\% \text{ m.v.} + 5 \text{ digits})$

### Capacitance measurement

Display range	Resolution	Accuracy
0.0...6.599 nF	0.001 nF	$\pm(3.0\% \text{ m.v.} + 30 \text{ digits})$
6.60...65.99 nF	0.01 nF	$\pm(3.0\% \text{ m.v.} + 10 \text{ digits})$
66.0...659.9 nF	0.1 nF	$\pm(3.0\% \text{ m.v.} + 30 \text{ digits})$
6.660...6.599 $\mu$ F	0.001 $\mu$ F	$\pm(3.0\% \text{ m.v.} + 10 \text{ digits})$
6.60...65.99 $\mu$ F	0.01 $\mu$ F	
66.0...659.9 $\mu$ F	0.1 $\mu$ F	
0.660...6.599 mF	0.001 mF	

### Frequency measurement

Display range	Resolution	Accuracy
10.00...65.99 Hz	0.01 Hz	$\pm(0.1\% \text{ m.v.} + 5 \text{ digits})$
66.0...659.9 Hz	0.1 Hz	
0.660...6.599 kHz	0.001 kHz	
6.60...65.99 kHz	0.01 kHz	
66.0...659.9 kHz	0.1 kHz	
0.660...1.000 MHz	0.001 MHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
5...95%	0.1%	$\pm(3.0\% \text{ m.v.} + 30 \text{ digits})$

» frequency range: 40 Hz...20 kHz.

### Temperature measurement

Display range	Resolution	Accuracy
0...400°C	1°C	$\pm(1.0\% \text{ m.v.} + 2^\circ\text{C})$
-20...0°C, 400...1000°C	1°C	$\pm(2.0\% \text{ m.v.} + 3^\circ\text{C})$
32...750°F	1°F	$\pm(1.0\% \text{ m.v.} + 4^\circ\text{F})$
-4...32°F, 750...1832°F	1°F	$\pm(2.0\% \text{ m.v.} + 6^\circ\text{F})$

"m.v." = "measured value"

### Other technical specifications:

- » display ..... segment LCD, readout of 6600 readings, 3 4/5 digits, backlit
- » power supply ..... 9 V battery, type 6LR61
- » indication of range overflow ..... 'OL' symbol is displayed
- » maximal wire diameter ..... 57 mm
- » maximal busbar dimensions ..... 70 x 18 mm
- » continuity test ..... threshold 30  $\Omega$
- » diode test .....  $I = 0.8 \text{ mA}$ ,  $U_0 = 3.2 \text{ V DC}$
- » sampling rate ..... nominal: 2.8 Hz  
analog bar graph: 28 Hz
- » input impedance
  - V AC ..... >8.5 M $\Omega$
  - V DC .....  $\geq 9 \text{ M}\Omega$
- » auto-off timeout ..... 30 minutes
- » operating temperature range ..... 0...+50°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 281 x 108 x 53 mm
- » weight with battery ..... 570 g
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001

## Clamp meter

# SONEL CMP-1015-PV

index: WMGBCMP1015PV



### Standard accessories:

Set of test leads (CAT IV, M)	WAPRZCMP2
Type K temperature probe adapter	WAADATEMK
Temperature measurement probe (type K)	WASONTEMK
Li-Pol battery 7.4 V 1200 mAh	WAAKU30
Battery charger	WAZASZ25
Battery charger power supply	WAZASZ26
M-3 carrying case	WAWALM3
Factory calibration certificate	

### Product features

- » current and voltage measurements downstream the inverter, frequency converter or in the VFD system
- » high voltage DC measurement (HVDC)
- » INRUSH function for measuring current drawn by an electrical device when first turned on
- » elimination of interference and induced voltages - Low Z
- » recorder, possibility of continuous recording
- » large clamp allows the measurement of conductors up to 48 mm in diameter
- » current measurement up to 1000 A AC/DC
- » temperature measurement in Fahrenheit and Celsius
- » non-contact voltage indication
- » automatic selection of measuring ranges
- » HOLD function, allowing for freezing the result on the display
- » built-in Bluetooth module for sending data to mobile devices with Android system
- » holding of MAX/MIN results
- » automatic power down - Auto-OFF function

### Direct current measurement

Display range	Resolution	Accuracy
60.00 A	0.01 A	±(2.0% m.v. + 8 digits)
600.0 A	0.1 A	
1000 A	1 A	

### Alternating current measurement (True RMS)

Display range	Resolution	Accuracy
60.00 A	0.01 A	±(2.5% m.v. + 5 digits)
600.0 A	0.1 A	
1000 A	1 A	

### Direct voltage measurement

Display range	Resolution	Accuracy
600.0 mV	0.1 mV	± (0.8% m.v. + 8 digits)
6.000 V	0.001 V	± (0.5% m.v. + 5 digits)
60.00 V	0.01 V	
600.0 V	0.1 V	± (0.8% m.v. + 5 digits)
1500 V	1 V	



## SONEL MULTIMETER MOBILE

Sonel Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from **Google Play**.

### Alternating voltage measurement (True RMS)

Display range	Resolution	Accuracy
0.000...6.000 V	0.001 V	f = 50...60 Hz ±(1.2% m.v. + 5 digits)
6.01...60.00 V	0.01 V	
60.1...600.0 V	0.1 V	
601...1000 V	1 V	f = 61...1000 Hz ±(2.5% m.v. + 5 digits)

### Resistance measurement

Display range	Resolution	Accuracy
0.0...600.0 Ω	0.1 Ω	±(1.0% m.v. + 10 digits)
0.601...6.000 kΩ	0.001 kΩ	±(0.8% m.v. + 5 digits)
6.01...60.00 kΩ	0.01 kΩ	
60.1...600.0 kΩ	0.1 kΩ	
0.601...6.000 MΩ	0.001 MΩ	±(2.5% m.v. + 10 digits)
6.01...60.00 MΩ	0.01 MΩ	

### Capacitance measurement

Display range	Resolution	Accuracy
0.00...60.00 nF	0.01 nF	±(3.0% m.v. + 20 digits)
60.1...600.0 nF	0.1 nF	±(3.0% m.v. + 8 digits)
0.601...6.000 μF	0.001 μF	
6.01...60.00 μF	0.01 μF	
60.1...600.0 μF	0.1 μF	±(3.5% m.v. + 20 digits)
601...6000 μF	1 μF	
6.01...60.00 mF	0.01 mF	unspecified
60.1...100.0 mF	0.1 mF	

### Frequency measurement

Display range	Resolution	Accuracy
0.00...60.00 Hz	0.01 Hz	±(0.2% m.v. + 5 digits)
60.1...600.0 Hz	0.1 Hz	
0.601...6.000 kHz	0.001 kHz	
6.01...60.00 kHz	0.01 kHz	
60.1...600.0 kHz	0.1 kHz	
0.601...6.000 MHz	0.001 MHz	
6.01...10.00 MHz	0.01 MHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
10...90%	0.1%	±(1.2% m.v. + 8 digits)

- » frequency range: 40 Hz...10 kHz.

### Temperature measurement

Display range	Resolution	Accuracy
-40.0...+1000°C	1°C or 1°F	±(1.5% m.v. + 3°C)
-40.0...+1832°F	1°C or 1°F	±(1.0% m.v. + 5.4°F)

"m.v." = "measured value"

### Other technical specifications:

- » display ..... graphical LCD, backlit
- » power supply ..... Li-Pol 7.4 V 1200 mAh rechargeable battery
- » indication of range overflow ..... "OL" symbol
- » maximal wire diameter ..... 48 mm
- » continuity test ..... threshold 50 Ω
- » diode test ..... I = 1.5 mA, U<sub>0</sub> < 3.3 V DC
- » sampling rate ..... nominal: 3 Hz
- » input impedance ..... ≥10 MΩ (V AC/DC)
- » recorder memory
  - capacity ..... 100 000 samples
  - sampling frequency ..... from 1 Hz
- » auto-off timeout ..... 15...60 min
- » operating temperature ..... 5...40°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 230 x 76 x 40 mm
- » weight ..... 490 g with battery
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001

## Clamp meter

# SONEL CMP-1010

index: WMGBCMP1010



### Standard accessories:

Set of test leads (CAT IV, M)	WAPRZCMP2
Type K temperature probe adapter	WAADATEMK
Temperature measurement probe (type K)	WASONTEMK
3x AA 1.5 V battery	
Standard carrying case	
Factory calibration certificate	

### Product features

- » current and voltage measurements downstream the inverter, frequency converter or in the VFD system
- » INRUSH function for measuring current drawn by an electrical device when first turned on
- » elimination of interference and induced voltages - LoZ
- » clamp allows the measurement of conductors up to 35 mm in diameter
- » current measurement up to 1000 A AC/DC
- » temperature measurement in Fahrenheit and Celsius
- » non-contact voltage indication
- » automatic selection of measuring ranges
- » HOLD function, allowing for freezing the result on the display
- » display of Peak MAX/Peak MIN extreme values
- » automatic power down - Auto-OFF function
- » shock resistant rugged case

### Direct and alternating (True RMS) current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
600.0 A	0.1 A	±(2.5% m.v. + 5 digits)	±(2.5% m.v. + 8 digits)
1000 A	1 A	±(2.8% m.v. + 5 digits)	±(2.8% m.v. + 8 digits)

### Direct voltage measurement

Display range	Resolution	Accuracy
600.0 mV	0.1 mV	±(0.5% m.v. + 5 digits)
6.000 V	0.001 V	±(1.5% m.v. + 2 digits)
60.00 V	0.01 V	
600.0 V	0.1 V	
1000 V	1 V	

### Alternating (True RMS) voltage measurement

Display range	Resolution	Accuracy
6.000 V	0.001 V	±(1.5% m.v. + 5 digits)
60.00 V	0.01 V	
600.0 V	0.1 V	
1000 V	1 V	

### LoZ measurement

Display range	Resolution	Accuracy
6.000 V	0.001 V	±(3.0% m.v. + 40 digits)
60.00 V	0.01 V	
300.0 V	0.1 V	

### Resistance measurement

Display range	Resolution	Accuracy
600.0 Ω	0.1 Ω	±(1.0% m.v. + 4 digits)
6.000 kΩ	0.001 kΩ	±(1.5% m.v. + 2 digits)
60.00 kΩ	0.01 kΩ	
600.0 kΩ	0.1 kΩ	±(2.5% m.v. + 3 digits)
6.000 MΩ	0.001 MΩ	
60.00 MΩ	0.01 MΩ	±(3.5% m.v. + 5 digits)

### Capacitance measurement

Display range	Resolution	Accuracy
60.00 nF	0.01 nF	±(4.0% m.v. + 20 digits)
600.0 nF	0.1 nF	±(3.0% m.v. + 5 digits)
6.000 μF	0.001 μF	
60.00 μF	0.01 μF	
600.0 μF	0.1 μF	
6.000 mF	0.001 mF	±(5.0% m.v. + 5 digits)
60.00 mF	0.01 mF	±(5.0% m.v. + 8 digits)
100.0 mF	0.1 mF	±(5.0% m.v. + 15 digits)

### Frequency measurement

Display range	Resolution	Accuracy
9.999 Hz	0.001 Hz	±(1.2% m.v. + 5 digits)
99.99 Hz	0.01 Hz	
999.9 Hz	0.1 Hz	
9.999 kHz	0.001 kHz	
99.99 kHz	0.01 kHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
10.0...90.0%	0.1%	±(1.2% m.v. + 2 digits)

- » frequency range: 40 Hz...10 kHz.

### Temperature measurement

Display range	Resolution	Accuracy
-20.0...+1000°C	0.1 or 1°C	±(3% m.v. + 5°C)
-4.0...+1832°F	0.1 or 1°F	±(3% m.v. + 9°F)

"m.v." = "measured value"

### Other technical specifications:

- » display ..... segment LCD, readout of 6000 readings, backlight
- » power supply of the meter ..... 3x 1,5 V battery, type LR6
- » indication of range overflow ..... 'OL' symbol
- » maximal wire diameter ..... 35 mm
- » continuity test ..... threshold 50 Ω; measurement current < 0.5 mA
- » diode test ..... I = 0.3 mA, U<sub>0</sub> < 3.2 V DC
- » sampling rate ..... 2 Hz
- » input impedance
  - V AC ..... ≥8.5 MΩ
  - V DC ..... ≥10 MΩ
  - LoZ ..... 300 kΩ
- » auto-off timeout ..... 30 min
- » operating temperature ..... +5...+40°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 250 x 90 x 40 mm
- » weight ..... 329 g
- » measuring category ..... CAT IV 600 V (CAT III 1000 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001



## Clamp meters

# SONEL CMP-403 / CMP-402

index: WMGBCMP403 / WMGBCMP402



### Standard accessories:

Test leads set (CAT IV, S)	WAPRZCMM1
Type K temperature probe adapter	WAADATEMK
Temperature measurement probe (type K)	WASONTEMK
3x AA 1.5 V battery	
Standard carrying case	
Factory calibration certificate	

### Product features

- » Current and voltage measurements downstream the inverter, frequency converter or in the VFD system
- » **INRUSH** function for measuring current drawn by an electrical device when first turned on
- » **clamp** allows the measurement of conductors **up to 30 mm in diameter**
- » current measurement:
  - **CMP-403** | up to **400 A** AC and DC
  - **CMP-402** | up to **400 A** AC
- » temperature measurement in **Fahrenheit and Celsius**
- » non-contact voltage indication
- » automatic selection of measuring ranges
- » relative measurement function
- » display of **Peak MAX/Peak MIN** extreme values
- » relative measurement function
- » automatic power down - **Auto-OFF** function
- » **shock resistant rugged case**

### Other technical specifications:

- » display ..... segment LCD, readout of 4000 readings, backlight
- » power supply of the meter ..... 3x 1.5 V battery, type LR6
- » indication of range overflow ..... 'OL' symbol
- » maximal wire diameter ..... 30 mm
- » continuity test ..... threshold 50  $\Omega$ , measurement current <1.5 mA
- » diode test .....  $I = 1.0$  mA,  $U_0 = 3.0$  V DC
- » sampling rate ..... 3 Hz
- » input impedance
  - **CMP-402** - V AC ..... >9.5 M $\Omega$
  - **CMP-402** - V DC .....  $\geq 10$  M $\Omega$
  - **CMP-403** - V AC ..... >9 M $\Omega$
  - **CMP-403** - V DC .....  $\geq 10$  M $\Omega$
- » auto-off timeout ..... 15 min
- » operating temperature ..... +5...+40°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 220 x 80 x 39 mm
- » weight
  - **CMP-402** ..... 266 g
  - **CMP-403** ..... 270 g
- » measuring category ..... CAT III 600 V (CAT II 1000 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001

### CMP-403 | Direct current measurement

Display range	Resolution	Accuracy
40.0 A	0.01 A	$\pm(2.0\% \text{ m.v.} + 8 \text{ digits})$
400.0 A	0.1 A	$\pm(2.5\% \text{ m.v.} + 8 \text{ digits})$

### Alternating current measurement

Display range	Resolution	Accuracy
40.00 A	0.01 A	$\pm(2.0\% \text{ m.v.} + 8 \text{ digits})$
400.0 A	0.1 A	$\pm(2.5\% \text{ m.v.} + 8 \text{ digits})$

» frequency range: 50 Hz...60 Hz

### Direct voltage measurement

Display range	Resolution	Accuracy
4.000 V	0.001 V	$\pm(1.0\% \text{ m.v.} + 3 \text{ digits})$
40.00 V	0.01 V	
400.0 V	0.1 V	$\pm(1.2\% \text{ m.v.} + 5 \text{ digits})$
1000 V	1 V	

### Alternating voltage and VFD measurement (True RMS)

Display range	Resolution	Accuracy for $f = 50 \text{ Hz} \dots 60 \text{ Hz}$ (all waveforms)	Accuracy for $f = 50 \text{ Hz} \dots 1 \text{ kHz}$ (sine waveforms)
4.000 V	0.001 V		
40.00 V	0.01 V	$\pm(1.2\% \text{ m.v.} + 5 \text{ digits})$	$\pm(1.2\% \text{ m.v.} + 5 \text{ digits})$
400.0 V	0.1 V		
1000 V	1 V	$\pm(1.5\% \text{ m.v.} + 5 \text{ digits})$	$\pm(1.5\% \text{ m.v.} + 5 \text{ digits})$

» frequency range: 50...1000 Hz

### Resistance measurement

Display range	Resolution	Accuracy
400.0 $\Omega$	0.1 $\Omega$	$\pm(1.0\% \text{ m.v.} + 4 \text{ digits})$
4.000 k $\Omega$	0.001 k $\Omega$	
40.00 k $\Omega$	0.01 k $\Omega$	$\pm(1.5\% \text{ m.v.} + 2 \text{ digits})$
400.0 k $\Omega$	0.1 k $\Omega$	
4.000 M $\Omega$	0.001 M $\Omega$	$\pm(2.0\% \text{ m.v.} + 5 \text{ digits})$
40.00 M $\Omega$	0.01 M $\Omega$	$\pm(3.0\% \text{ m.v.} + 8 \text{ digits})$

### Capacitance measurement

Display range	Resolution	Accuracy
9.999 nF	0.001 nF	unspecified
99.99 nF	0.01 nF	$\pm(4.5\% \text{ m.v.} + 20 \text{ digits})$
999.9 nF	0.1 nF	
9.999 $\mu\text{F}$	0.001 $\mu\text{F}$	
99.99 $\mu\text{F}$	0.01 $\mu\text{F}$	$\pm(3.0\% \text{ m.v.} + 5 \text{ digits})$
999.9 $\mu\text{F}$	0.1 $\mu\text{F}$	
9.999 mF	0.001 mF	
99.99 mF	0.01 mF	$\pm(5.0\% \text{ m.v.} + 5 \text{ digits})$

### Frequency measurement - current

Display range	Resolution	Accuracy
99.99 Hz	0.01 Hz	
999.9 Hz	0.1 Hz	$\pm(1.0\% \text{ m.v.} + 5 \text{ digits})$

### Frequency measurement - voltage

Display range	Resolution	Accuracy
99.99 Hz	0.01 Hz	
999.9 Hz	0.1 Hz	
9.999 kHz	0.001 kHz	$\pm(1.0\% \text{ m.v.} + 5 \text{ digits})$
99.99 kHz	0.01 kHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
20.0...80.0%	0.1%	$\pm(1.2\% \text{ m.v.} + 10 \text{ digits})$

» frequency range: 45 Hz...10 kHz.

### Temperature measurement

Display range	Resolution	Accuracy
-20.0...+1000°C	0.1 or 1°C	$\pm(3\% \text{ m.v.} + 5^\circ\text{C})$
-4.0...+1832°F	0.1 or 1°F	$\pm(3\% \text{ m.v.} + 5^\circ\text{F})$

"m.v." = "measured value"

AC digital clamp meter with data logger

## SONEL CMP-3kR

index: WMGBCMP3KR



### Standard accessories:

Flexible clamp F-16	WACEGF16
2x AA 1,5 V battery	
Standard carrying case	
Factory calibration certificate	

### Product features

- » **True RMS** AC current measurement for accurate and reliable readings of non-sinusoidal signals
- » **INRUSH** function for measuring current drawn by an electrical device when first turned on
- » **recorder** with sampling every 1 s, possibility of continuous recording for 24 hours
- » **real-time clock** that allows adding date and time of measurement to each stored result
- » data export to the **Sonel Multimeter Mobile** application, viewing the recording results in the application, data export to external files for reading on a PC
- » **flexible clamp** allow the measurement of conductors up to **160 mm** in diameter
- » current measurement **up to 3000 A AC**
- » automatic selection of measuring ranges
- » **HOLD** function, allowing for freezing the result on the display
- » auto-off function

### Other technical specifications:

- » display ..... segment LCD, readout of 3000, 4 digits, backlit
- » power supply ..... 2x 1.5 V battery, type LR6
- » indication of range overflow ..... 'OL' symbol is displayed
- » maximal wire diameter ..... 160 mm
- » maximal busbar diameter ..... 500 mm
- » sampling rate ..... nominal: 3 Hz
- » recorder memory
  - capacity ..... 86 400 samples
  - sampling frequency ..... 1 Hz
  - maximum recording time ..... 24 h
- » auto-off timeout ..... 15 min
- » operating temperature ..... 5...40°C
- » storage temperature ..... -20...+60°C
- » storage humidity ..... <80%
- » dimensions ..... 150 x 65 x 35 mm
- » flexible clamp dimensions ..... 140 x 180 mm
- » weight ..... 240 g
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032
- » quality standard ..... ISO 9001



## SONEL MULTIMETER MOBILE

Sonel Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from **Google Play**.

### Alternating current measurement (True RMS)

Display range	Resolution	Accuracy
0.0...30.00 A	0.01 A	±(3.0% m.v. + 8 digits) for 50...400 Hz
30.1...300.0 A	0.1 A	±(3.0% m.v. + 5 digits) for 50...400 Hz
301...3000 A	1 A	

### Frequency measurement

Display range	Resolution	Accuracy
0.0...400.0 Hz	0.1 Hz	±(0.5% m.v. + 5 digits)

"m.v." = "measured value"



## Fork clamp meter

### SONEL CMP-200F

index: WMGBCMP200F



CAT IV

600 V

CAT III

1000 V

IP40

FORK-STYLE CLAMP

BUILT-IN FLASHLIGHT



#### Product features

- » fork-style clamp
- » AC current and AC voltage measurement
- » DC voltage measurement
- » low-impedance voltage measurement - **Low Z**
- » current measurement up to **200 A AC**
- » automatic selection of measuring ranges
- » **HOLD** function, allowing for freezing the result on the display
- » function **MAX MIN** for displaying extreme values
- » **Auto-OFF** function

#### Standard accessories:

Set of test leads (CAT IV, M)	WAPRZCMM2
2x 1,5 V battery	
Standard carrying case	
Factory calibration certificate	

#### Alternating current measurement (True RMS)

Display range	Resolution	Accuracy
200,0 A	0,1 A	±(3% m.v. + 5 digits)

#### Alternating and direct voltage measurement

Display range	Resolution	Accuracy AC	Accuracy DC
6,000 V	0,001 V	±(1,2% m.v. + 5 digits)	±(0,9% m.v. + 5 digits)
60,00 V	0,01 V	±(1,2% m.v. + 2 digits)	±(1,0% m.v. + 2 digits)
600,0 V	0,1 V	±(1,5% m.v. + 2 digits)	±(1,2% m.v. + 2 digits)
1000 V	1 V	±(1,5% m.v. + 2 digits)	±(1,2% m.v. + 2 digits)

- » frequency range: 50...1000 Hz

#### Low Z measurement

Display range	Resolution	Accuracy
6,000 V	0,001 V	±(3,0% m.v. + 40 digits)
60,00 V	0,01 V	
600,0 V	0,1 V	

- » frequency range: 50 Hz...1000 Hz

#### Resistance measurement

Display range	Resolution	Accuracy
600,0 Ω	0,1 Ω	±(1,0% m.v. + 4 digits)
6,000 kΩ	0,001 kΩ	±(1,5% m.v. + 4 digits)
60,00 kΩ	0,01 kΩ	
600,0 kΩ	0,1 kΩ	
6,000 MΩ	0,001 MΩ	±(2,5% m.v. + 4 digits)
60,00 MΩ	0,01 MΩ	±(3,5% m.v. + 4 digits)

#### Capacitance measurement

Display range	Resolution	Accuracy
60,00 nF	0,01 nF	±(3,0% m.v. + 5 digits)
600,0 nF	0,1 nF	
6,000 μF	0,001 μF	
60,00 μF	0,01 μF	±(3,5% m.v. + 10 digits)
600,0 μF	0,1 μF	
4000 μF	1 μF	±(5,0% m.v. + 10 digits)

"m.v." = "measured value"

## Leakage current clamp meter

### SONEL CMP-200

index: WMGBCMP200



CAT II

600 V

IP40

#### Measurement of alternating current up to 200 A

- » high resolution (0.1 mA),
- » 3 measuring subranges: 200 mA, 2 A, 200 A.

#### Additional functions of the meter

- » segment LCD, readout of 1999 readings, 3 1/2 digits, backlit
- » maximum wire diameter 30 mm
- » **HOLD** function, allowing for freezing the measurement result on the display,
- » **MAX** function, freezing of maximum values
- » automatic power down of instrument when not in use
- » reinforced, impact resistant enclosure

#### Current measurement

Display range	Resolution	Accuracy
199.9 mA	0.1 mA	±(5% m.v. + 8 digits)
1.999 A	0.001 A	±(5% m.v. + 10 digits)
199.9 A	0.1 A	±(2.5% m.v. + 10 digits)

## Leakage current clamp meter

### SONEL CMP-100

index: WMGBCMP100



CAT III

300 V

IP30

BUILT-IN FLASHLIGHT

LEAKAGE CURRENT

#### Measurement of alternating current up to 100 A

- » high resolution (1 μA)
- » 6 measuring subranges: 6 mA, 60 mA, 600 mA, 6 A, 60 A, 100 A

#### Additional functions of the meter

- » segment LCD, readout of 6000 readings, backlit
- » maximum wire diameter 40 mm
- » **low-pass filter**
- » **HOLD** function, allowing for freezing the measurement result on the display
- » **PEAK** function for displaying peak values
- » automatic power down of instrument when not in use
- » reinforced, impact resistant enclosure

#### Current measurement (True RMS)

Display range	Resolution	Accuracy	Accuracy (low-pass filter)
6.000 mA	0.001 mA	±(1.5% m.v. + 8 digits)	±(2.0% m.v. + 8 digits)
60.00 mA	0.01 A		
600.0 mA	0.1 A	±(1.0% m.v. + 5 digits)	±(1.5% m.v. + 8 digits)
6.000 A	0.001 A		
60.00 A	0.01 A	±(1.0% m.v. + 8 digits)	
100.0 A	0.1 A		



# CMP

## Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
- - optional accessories


































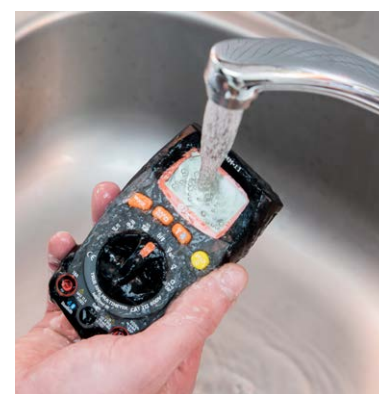
Photo	Name	Index	CMP-3000	CMP-1015-PV	CMP-2000	CMP-1010	CMP-403/402	CMP-3KR	CMP-200F	CMP-200	CMP-100
	AC-16 line splitter	WAADAAC16	*	*	*	*	*	*	*	*	*
	AHV-3 voltage adapter	WAADAAHV3	*		*	*	*	*	*		
	F-16 flexible clamp	WACEGF16	1					1			
	Test lead with probe for CMM/CMP (set)	WAPRZCMP1	*	*	1	*	*	*	*		
	Test lead with probe for CMM/CMP (set)	WAPRZCMP2	*	1	*	1	*	*	*		
	Test leads set for CMM (CAT IV, S)	WAPRZCMM1	*	*	*	*	1	*	*		
	Test leads set for CMM (CAT IV, M)	WAPRZCMM2	1	*	*	*	*	*	1		
	Test lead for CMM/CMP (set)	WAPRZCMX1	*	*	*	*	*	*	*		
	Test lead 2,0 m black CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BLBBF10	*	*	*	*	*	*	*		
	Test lead 2,0 m blue CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BUBBF10	*	*	*	*	*	*	*		
	Test lead 2,0 m green CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002GRBBF10	*	*	*	*	*	*	*		
	Test lead 2,0 m red CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002REBBF10	*	*	*	*	*	*	*		
	Test lead 2,0 m yellow CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002YEBBF10	*	*	*	*	*	*	*		
	Crocodile clip mini, 1 kV 10 A (set)	WAKROKPL10MINI	*	*	*	*	*	*	*		

Photo	Name	Index	CMP-3000	CMP-1015-PV	CMP-2000	CMP-1010	CMP-403/402	CMP-3KR	CMP-200F	CMP-200	CMP-100
	Type K temperature probe adapter	WAADATEMK	1	1		1	1				
	Temperature probe (type K)	WASONTEMK	1	1	1	1					
	Temperature probe (type K, metal)	WASONTEMK2	*	*	*	*	*				
	Temperature probe (type K, bayonet)	WASONTEMP	*	*	*	*	*				
	M1 hanging hook straps	WAP0ZUCH1						*			
	Magnetic hanging strap	WAP0ZUCH6						*			
	Mounting adapter for AHV-3	WAP0ZUCH13			*						
	Battery charger	WAZASZ25		1							
	Battery charger power supply	WAZASZ26		1							
	Li-Pol battery 7.4 V, 1200 mAh	WAAKU30		1							
	M13 carrying case	WAFUTM13	*	*	*	*	*	*	*	*	*
	S1 carrying case	WAFUTS1								*	
	M3 carrying case	WAWALM3		1							


## Comparison of multimeters

					
	<b>CMM-60</b> High-end industrial meter	<b>CMM-40</b> Industrial area meter	<b>CMM-30</b> Meter for industry	<b>CMM-11</b> Compact meter for general purpose	<b>CMM-10</b> Pocket meter for basic measurements
<b>Measurement functions</b>					
AC/DC voltage	1000.0 V	1000.0 V	1000.0 V	600 V	600 V
AC/DC current	10.000 A	10.000 A	10.00 A	10.00 A	10.00 A
Resistance	50.000 MΩ	40.000 MΩ	60.00 MΩ	40.00 MΩ	40.00 MΩ
Frequency	10.000 MHz	100.00 MHz	10 kHz	100.0 kHz	10.00 MHz
Capacitance	10.00 mF	40.000 mF	6000 μF	4000 μF	100.0 μF
Temperature	1000.0°C	1200.0°C	760°C	-	760°C
dB	✓	-	-	-	-
Duty cycle (%) / impulse width (ms)	✓ / ✓	✓ / -	✓ / -	✓ / -	✓ / -
Continuity / diode test	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
4-20 mA current loop measurement	✓	✓	-	-	-
Low Z	-	-	✓	-	-
Low-pass filter	✓	-	-	-	-
<b>Basic features</b>					
<b>True RMS measurement</b>	✓	✓	✓	✓	-
Automatic / manual range selection	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
<b>Advanced features</b>					
MAX / MIN / AVG measurement	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / -	- / - / -
HOLD	✓	✓	✓	✓	✓
PEAK HOLD	✓	✓	✓	-	-
Crest factor	✓	-	-	-	-
AC + DC	✓	✓	✓	-	-
Relative measurement	✓	✓	✓	-	✓
Recorder	✓	-	-	-	-
Trend capture function	✓	-	-	-	-
Memory	✓	✓	in mobile app	in mobile app	-
Bluetooth	✓	-	✓	✓	-
Sonei Multimeter Mobile	✓	-	✓	✓	-
<b>Other features</b>					
Clock	✓	-	-	-	-
Easy access to fuses A / mA	- / ✓	- / -	✓ / ✓	✓ / ✓	✓ / ✓
Automatic shutdown	✓	✓	✓	✓	✓
Battery indicator	✓	✓	✓	✓	✓
Built-in flashlight	-	-	✓	✓	-
Beeper	✓	✓	✓	✓	✓
<b>Display</b>					
Graphical	✓	-	-	-	-
Segmented	-	✓	✓	✓	✓
Counting	50.000	40.000	6.000	4.000	4.000
Backlit	✓	✓	✓ / auto	✓	✓
<b>Safety and conditions of use</b>					
Measurement category (EN 61010)	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT III 600 V	CAT II 600 V
Ingress protection	IP67	IP67	IP67	IP65	IP40
Operating temperature	5...40°C	0...40°C	0...40°C	5...40°C	0...50°C

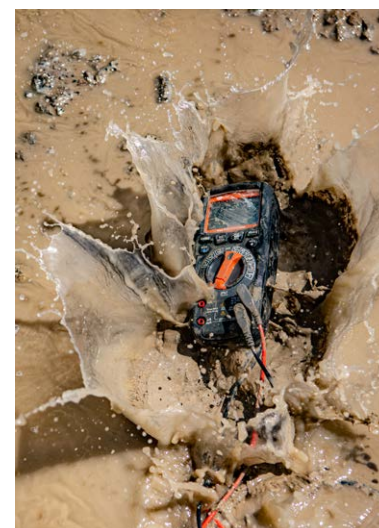

## SONEL CMM-60

index: WMGBCMM60



## Measurements

- » AC & DC voltage
- » AC & DC current
- » resistance
- » capacitance
- » temperature
- » duty cycle & impulse width
- » frequency
- » current loop 4-20 mA%
- » ...and much more

## Additional functions

- » the **AC + DC function** allows you to simultaneously display the value of the constant and variable component or the sum of both components during voltage measurement
- » **True RMS for AC voltage and current** for measuring the effective value of distorted waveforms
- » **4~20 mA** function used for, among others, measurement of the analogue control circuits of temperature, pressure, pH or flow sensors
- » fast and easy reading is provided by a **colour display** with a resolution 320 x 240 pixels and a diagonal of 3.5", enabling reading the result under wide angle and in dark locations
- » built-in **low-pass filter**, thanks to which the voltage measurements will be more accurate by eliminating the influence of interference generated by machines and electronic devices
- » displaying **PEAK** values
- » the relative **REL** measurement
- » **real-time clock** that allows adding date and time of measurement to each stored result
- » **built-in memory for 2000 measurements**
- » possibility of quick detection of irregularities due to the registration of measurement results in graphical form of the trend, thanks to the **Trend Capture function** and the built-in recorder with the possibility of recording up to 10,000 samples
- » built-in **Bluetooth module** for sending live measurement results to **Android mobile devices** and - for PCs - **CMM-60 Multimeter Software**
- » registration of maximum and minimum values and calculation of the average of current measurements
- » integrated **HELP** function
- » manual and automatic range selection
- » freezing the measurement result thanks to **HOLD** and **Auto HOLD** function
- » auto power-off thanks to **Auto-OFF** function after selecting of a specific idle period
- » extremely hermetic (**IP67**) and reinforced, shock-protected housing **covered with elastomer**

## Direct and alternating (True RMS) voltage measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
50.000 mV	0.001 mV	$\pm(0.05\% \text{ m.v.} + 20 \text{ digits})$	$f = 50/60 \text{ Hz}$
500.00 mV	0.01 mV		$\pm(0.3\% \text{ m.v.} + 25 \text{ digits})$
5.0000 V	0.0001 V	$\pm(0.025\% \text{ m.v.} + 5 \text{ digits})$	$f < 1 \text{ kHz}$
50.000 V	0.001 V		$\pm(0.5\% \text{ m.v.} + 25 \text{ digits})$
500.00 V	0.01 V	$\pm(0.05\% \text{ m.v.} + 5 \text{ digits})$	$f < 5 \text{ kHz}$
1000.0 V	0.1 V	$\pm(0.1\% \text{ m.v.} + 5 \text{ digits})$	$\pm(3\% \text{ m.v.} + 25 \text{ digits})$

- » frequency range 50...10 kHz

## Direct and alternating (True RMS) current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
500.00 $\mu\text{A}$	0.01 $\mu\text{A}$		$f = 50/60 \text{ Hz}$
5000.0 $\mu\text{A}$	0.1 $\mu\text{A}$	$\pm(0.1\% \text{ m.v.} + 20 \text{ digits})$	$\pm(0.6\% \text{ m.v.} + 25 \text{ digits})$
50.000 mA	0.001 mA		$f < 1 \text{ kHz}$
500.00 mA	0.01 mA	$\pm(0.15\% \text{ m.v.} + 20 \text{ digits})$	$\pm(1.5\% \text{ m.v.} + 25 \text{ digits})$
10.000 A	0.001 A	$\pm(0.3\% \text{ m.v.} + 20 \text{ digits})$	$f < 5 \text{ kHz}$
			$\pm(3\% \text{ m.v.} + 25 \text{ digits})$

20 A maximum 30 seconds with reduced accuracy



## SONEL MULTIMETER MOBILE

Sonel Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from **Google Play**.

## Standard accessories:

Test leads set (CAT IV, M)	WAPRZCMM2
Temperature probe (type K, metal)	WASONTEMK2
Type K temperature probe adapter	WAADATEMK
Battery charger	WAZASZ21
Charging adapter	WAADALAD1
CMM-RR radio receiver	WAADACMMRR
Li-Pol battery 7.4 V, 2400 mAh	WAAKU25
2x socket protective plug	
Factory calibration certificate	

## Resistance measurement

Display range	Resolution	Accuracy
50.000 $\Omega$	0.001 $\Omega$	$\pm(0.5\% \text{ m.v.} + 20 \text{ digits})$
500.00 $\Omega$	0.01 k $\Omega$	
5.0000 k $\Omega$	0.0001 k $\Omega$	$\pm(0.05\% \text{ m.v.} + 10 \text{ digits})$
50.000 k $\Omega$	0.001 k $\Omega$	
500.00 k $\Omega$	0.01 k $\Omega$	$\pm(0.1\% \text{ m.v.} + 10 \text{ digits})$
5.0000 M $\Omega$	0.0001 M $\Omega$	$\pm(0.2\% \text{ m.v.} + 20 \text{ digits})$
50.000 M $\Omega$	0.001 M $\Omega$	$\pm(2\% \text{ m.v.} + 20 \text{ digits})$

## Capacitance measurement

Display range	Resolution	Accuracy
5.000 nF	0.001 nF	
50.00 nF	0.01 nF	
500.0 nF	0.1 nF	$\pm(2\% \text{ m.v.} + 40 \text{ digits})$
5.000 $\mu\text{F}$	0.001 $\mu\text{F}$	
50.00 $\mu\text{F}$	0.01 $\mu\text{F}$	
500.0 $\mu\text{F}$	0.1 $\mu\text{F}$	$\pm(5\% \text{ m.v.} + 40 \text{ digits})$
10.00 mF	0.01 mF	

## Electronic frequency measurement

Display range	Resolution	Accuracy
50.000 Hz	0.001 Hz	
500.00 Hz	0.01 Hz	
5.0000 kHz	0.0001 kHz	$\pm(0.01\% \text{ m.v.} + 10 \text{ digits})$
50.000 kHz	0.001 kHz	
500.00 kHz	0.01 kHz	
5.0000 MHz	0.0001 MHz	
10.000 MHz	0.001 MHz	

## Temperature measurement

Display range	Resolution	Accuracy
-50.0...1000°C	0.1°C	$\pm(1.0\% \text{ m.v.} + 2.5^\circ\text{C})$
-58...1832°F	0.1°F	$\pm(1.0\% \text{ m.v.} + 4.5^\circ\text{F})$

## Other technical specifications

- » display ..... 3.5" colour TFT LCD 320 x 240 pixels
- » power supply ..... Li-Pol 7.2 V 2400 mAh rechargeable battery
- » indication of range overflow ..... "OL" symbol
- » crest factor .....  $\leq 3$  for full 500 V range  
decreasing linearly to  $\leq 1.5$  at 1000 V
- » continuity test .....  $I < 0.35 \text{ mA}$ , sound signal for  $R < 25 \Omega$
- » diode test .....  $I = 0.9 \text{ mA}$ ,  $U_0 = 3.2 \text{ V DC}$
- » sampling rate ..... 20 Hz
- » input impedance .....  $\geq 6 \text{ M}\Omega$  (V AC/DC)
- » recorder memory  
capacity ..... 10 000 samples  
sampling frequency ..... from 1 Hz
- » auto-off timeout ..... 15 min
- » fuses  
mA,  $\mu\text{A}$  range ..... 0.8 A/1000 V fast-acting ceramic  
A range ..... 10 A/1000 V fast-acting ceramic
- » operating temperature range .....  $+5...+40^\circ\text{C}$
- » storage temperature .....  $-20...+60^\circ\text{C}$
- » dimensions ..... 220 x 97 x 58 mm
- » weight ..... 342 g
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » compliance with standards ..... EN 61010-1, EN 61010-2-032



# SONEL CMM-40

index: WMGBCMM40



## Measurements

- » AC & DC voltage
- » AC & DC current
- » resistance
- » capacitance
- » temperature
- » duty cycle
- » frequency
- » current loop 4-20 mA%
- » diode test and continuity

## Additional functions

- » the **AC + DC function** allows you to simultaneously display the value of the constant and variable component or the sum of both components during voltage measurement
- » **True RMS for AC voltage and current** allows to measure the effective value of distorted waveforms
- » the **4~20 mA function** used for, among others, measurement of the control circuits of temperature, pressure, pH or flow sensors
- » displaying **PEAK** values
- » the **relative REL measurement function**
- » dual display to show several results at the same time
- » built-in memory for 2000 measurements
- » registration of maximum and minimum values
- » **automatic and manual range selection**
- » HOLD function
- » auto power-off thanks to **Auto-OFF function** after selecting of a specific idle period
- » extremely hermetic (**IP67**) and reinforced, shock-protected housing **covered with elastomer**

## Direct and alternating (True RMS) voltage measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.00 mV	0.01 mV	$\pm(0.06 \text{ m.v.} + 4 \text{ digits})$	$\pm(1 \text{ m.v.} + 40 \text{ digits})$
4.0000 V	0.0001 V		
40.000 V	0.001 V		
400.00 V	0.01 V	$\pm(1 \text{ m.v.} + 30 \text{ digits})$	$\pm(1 \text{ m.v.} + 30 \text{ digits})$
1000.0 V	0.1 V		

- » frequency range 50...1000 Hz.

## Direct and alternating (True RMS) current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.00 $\mu$ A	0.01 $\mu$ A	$\pm(1.0 \text{ m.v.} + 3 \text{ digits})$	$\pm(1.5 \text{ m.v.} + 30 \text{ digits})$
4000.0 $\mu$ A	0.1 $\mu$ A		
40.000 mA	0.001 mA		
400.00 mA	0.01 mA		
10.000 A	0.001 A		

20 A

maximum 30 seconds with reduced accuracy.

## Standard accessories:

Test leads set (CAT IV, M)	WAPRZCMM2
Temperature measurement probe (type K)	WASONTEMK
Type K temperature probe adapter	WAADATEMK
2x socket protective plug	
Standard carrying case	
9 V battery	
Factory calibration certificate	

## Resistance measurement

Display range	Resolution	Accuracy
400.00 $\Omega$	0.01 $\Omega$	$\pm(0.3 \text{ m.v.} + 9 \text{ digits})$
4.0000 k $\Omega$	0.0001 k $\Omega$	$\pm(0.3 \text{ m.v.} + 4 \text{ digits})$
40.000 k $\Omega$	0.001 k $\Omega$	
400.00 k $\Omega$	0.01 k $\Omega$	
4.0000 M $\Omega$	0.0001 M $\Omega$	$\pm(2.0 \text{ m.v.} + 10 \text{ digits})$
40.000 M $\Omega$	0.001 M $\Omega$	

## Capacitance measurement

Display range	Resolution	Accuracy
40.000 nF	0.001 nF	$\pm(3.5 \text{ m.v.} + 40 \text{ digits})$
400.00 nF	0.01 nF	$\pm(3.5 \text{ m.v.} + 10 \text{ digits})$
4.0000 $\mu$ F	0.0001 $\mu$ F	
40.000 $\mu$ F	0.001 $\mu$ F	
400.00 $\mu$ F	0.01 $\mu$ F	$\pm(5.0 \text{ m.v.} + 10 \text{ digits})$
4000.0 $\mu$ F	0.1 $\mu$ F	
40.000 mF	0.001 mF	

## Electronic frequency measurement

Display range	Resolution	Accuracy
40.000 Hz	0.001 Hz	$\pm(0.1 \text{ m.v.} + 1 \text{ digit})$
400.00 Hz	0.01 Hz	
4.0000 kHz	0.0001 kHz	
40.000 kHz	0.001 kHz	
400.00 kHz	0.01 kHz	
4.0000 MHz	0.0001 MHz	
40.000 MHz	0.001 MHz	unspecified
100.00 MHz	0.01 MHz	

## Temperature measurement

Display range	Resolution	Accuracy
-50.0...1200°C	0.1°C	$\pm(1.0 \text{ m.v.} + 2.5^\circ\text{C})$
-58...2192°F	0.1°F	$\pm(1.0 \text{ m.v.} + 4.5^\circ\text{F})$

## Other technical specifications:

- » display ..... segment LCD, readout of 40,000 readings, 4 4/5 digits, backlit
- » power supply of the meter ..... 9 V battery, type 6LR61
- » indication of range overflow ..... "OL" symbol
- » crest factor .....  $\leq 3$  for full 500 V range  
decreasing linearly to  $\leq 1.5$  at 1000 V
- » continuity test ..... threshold 35  $\Omega$ , measuring current  $<0.35 \text{ mA}$
- » diode test .....  $I=0.9 \text{ mA}$ ,  $U_0=2.8 \text{ V DC}$
- » sampling rate ..... 2 Hz
- » input impedance .....  $>9 \text{ M}\Omega$  (V AC),  $\geq 10 \text{ M}\Omega$  (V DC)
- » auto-off timeout ..... 15 min
- » fuses ..... mA,  $\mu$ A range: 0.5 A / 1000 V fast-acting ceramic  
A range: 10 A / 1000 V fast-acting ceramic
- » operating temperature range ..... 0...+40°C
- » storage temperature ..... -20...+60°C
- » dimensions ..... 187 x 81 x 55 mm
- » weight ..... 342 g
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » type of insulation ..... double, as per EN 61010-1, EN 61010-2-032



## SONEL CMM-30

index: WMGBCMM30

CAT III

1000 V

CAT IV

600 V

IP67

BLUETOOTH

AUTO BACKLIGHT

BUILT-IN FLASHLIGHT



## Measurements

- » AC & DC voltage
- » AC & DC current
- » resistance
- » capacitance
- » duty cycle
- » frequency
- » diode and continuity test
- » Low Z

## Additional functions

- » the **AC + DC function** allows you to simultaneously display the value of the constant and variable component or the sum of both components during voltage measurement
- » **True RMS** for AC voltage and current allows to measure the effective value of distorted waveforms
- » function **MAX MIN** for displaying extreme values
- » function **AVG** for displaying average value
- » the relative **REL** measurement
- » automatic and manual range selection
- » **HOLD** function
- » built-in **Bluetooth module** for sending data to mobile devices with Android system
- » **automatic backlight** of the display, buttons and rotary switch
- » built-in **flashlight** for illuminating dark measurement places
- » **Auto-OFF** function
- » hermetic (**IP67**) and reinforced housing resistant to shocks, covered with elastomer

## Direct and alternating (True RMS) voltage measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
600.0 mV	0.1 mV	±(0.5% m.v. + 8 digits)	-
6.000 V	0.001 V	±(0.8% m.v. + 5 digits)	±(1.0% m.v. + 5 digits)
60.00 V	0.01 V		
600.0 V	0.1 V		
1000 V	1 V	±(1.0% m.v. + 3 digits)	±(1.2% m.v. + 5 digits)

- » input impedance: 10 MΩ
- » frequency range: 45...1000 Hz

## Direct and alternating (True RMS) current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
600.0 μA	0.1 μA	±(1.0% m.v. + 3 digits)	±(1.0% m.v. + 3 digits)
6000 μA	1 μA		
60.00 mA	0.01 mA		
600.0 mA	0.1 mA	±(1.5% m.v. + 3 digits)	±(2.0% m.v. + 8 digits)
10.00 A	0.01 A		



## SONEL MULTIMETER MOBILE

Sonel Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from **Google Play**.

## Standard accessories:

Test leads set (CAT IV, M)	WAPRZCMM2
Type K temperature probe adapter	WAADATEMK
Temperature probe (type K)	WASONTEMK
Standard carrying case	
4x AAA 1.5 V battery	
Factory calibration certificate	

## Resistance measurement

Display range	Resolution	Accuracy
600.0 Ω	0.1 Ω	±(1.5% m.v. + 5 digits)
6.000 kΩ	0.001 kΩ	
60.00 kΩ	0.01 kΩ	
600.0 kΩ	0.1 kΩ	
6.000 MΩ	0.001 MΩ	
60.00 MΩ	0.01 MΩ	±(2.0% m.v. + 10 digits)

## Capacitance measurement

Display range	Resolution	Accuracy
60.00 nF	0.01 nF	±(5.0% m.v. + 35 digits)
600.0 nF	0.1 nF	
6.000 μF	0.001 μF	±(3.0% m.v. + 5 digits)
60.00 μF	0.01 μF	
600.0 μF	0.1 μF	±(5.0% m.v. + 5 digits)
6000 μF	1 μF	

## Frequency measurement

Display range	Resolution	Accuracy
9.999 Hz	0.001 Hz	±(1.0% m.v. + 5 digits)
99.99 Hz	0.01 Hz	
999.9 Hz	0.1 Hz	
9.999 kHz	0.001 kHz	

## Duty cycle measurement

Display range	Resolution	Accuracy
20.0...80.0%	0.1%	±(1.2% m.v. + 2 digits)

## Temperature measurement

Display range	Resolution	Accuracy
-20...760°C	0.1°C or 1°C	±(1.0% m.v. + 5°C)
-4...1400°F	0.1°F or 1°F	±(1.0% m.v. + 9°F)

## Other technical specifications:

- » display ..... segment LCD, readout of 6000, 4 digits, backlit
- » power supply ..... 4 x AAA 1.5 V battery  
..... or 4x AAA NiMH 1.2 V rechargeable battery
- » indication of range overflow ..... „OL” symbol
- » continuity test ..... threshold 30 Ω, measuring current <0.35 mA
- » diode test ..... I=1 mA, U<sub>0</sub><3 V DC
- » sampling rate ..... 3 Hz
- » input impedance  
• V AC ..... >11.5 MΩ  
• V DC ..... >8.5 MΩ
- » auto-off timeout ..... 15 min
- » fuses ..... mA, μA range: 0.8 A / 1000 V fast-acting  
..... A range: 10 A / 1000 V fast-acting
- » operating temperature range ..... 0...+40°C at humidity <75%
- » storage temperature ..... -20...+60°C at humidity <80%
- » dimensions ..... 170 x 75 x 48 mm
- » weight ..... 418 g
- » measurement category ..... CAT III 1000 V (CAT IV 600 V)
- » compliance with standards ..... EN 61010-1  
..... EN 61010-2-031, EN 61010-2-033  
..... EN 61326-1, EN 61326-2-2

## SONEL CMM-11

index: WMGBCMM11



### Measurements

- » AC & DC voltage
- » AC & DC current
- » resistance
- » capacitance
- » duty cycle
- » frequency
- » diode and continuity test

### Additional functions

- » **True RMS** for AC voltage and current allows to measure the effective value of distorted waveforms
- » function **MAX MIN** for displaying extreme values
- » automatic and manual range selection
- » **HOLD** function
- » built-in **Bluetooth module** for sending data to mobile devices with Android system
- » built-in **flashlight** for illuminating dark measurement places
- » **Auto-OFF** function
- » hermetic (IP65) and reinforced housing resistant to shocks, **covered with elastomer**

### Direct and alternating (True RMS) voltage measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.0 mV	0.1 mV	±(1.0% m.v. + 8 digits)	-
4.000 V	0.001 V	±(1.0% m.v. + 3 digits)	±(1.0% m.v. + 5 digits)
40.00 V	0.01 V		
400.0 V	0.1 V		
600 V	1 V	±(1.2% m.v. + 3 digits)	±(1.2% m.v. + 5 digits)

- » input impedance: 10 MΩ
- » frequency range: 50...60 Hz

### Direct and alternating (True RMS) current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.0 μA	0.1 μA	±(1.0% m.v. + 3 digits)	±(2.0% m.v. + 5 digits)
4000 μA	1 μA	±(1.5% m.v. + 3 digits)	±(2.5% m.v. + 5 digits)
40.00 mA	0.01 mA		
400.0 mA	0.1 mA		
10.00 A	0.01 A	±(2.5% m.v. + 5 digits)	±(3.0% m.v. + 7 digits)



## SONEL MULTIMETER MOBILE

SoneI Multimeter Mobile application is intended for reading measurement values in live mode, as well as for transferring and storing measurement results in the memory of mobile devices based on the Android system. It can be downloaded from **Google Play**.

### Standard accessories:

Test leads set (CAT IV, S)	WAPRZCMM1
2x AAA 1.5 V battery	
Factory calibration certificate	

### Resistance measurement

Display range	Resolution	Accuracy
400.0 Ω	0.1 Ω	±(1.0% m.v. + 4 digits)
4.000 kΩ	0.001 kΩ	±(1.5% m.v. + 5 digits)
40.00 kΩ	0.01 kΩ	
400.0 kΩ	0.1 kΩ	
4.000 MΩ	0.001 MΩ	
40.00 MΩ	0.01 MΩ	

### Capacitance measurement

Display range	Resolution	Accuracy
40.00 nF	0.01 nF	±(5.0% m.v. + 35 digits)
400.0 nF	0.1 nF	±(3.0% m.v. + 5 digits)
4.000 μF	0.001 μF	
40.00 μF	0.01 μF	±(4.0% m.v. + 5 digits)
400.0 μF	0.1 μF	
4000 μF	1 μF	±(5.0% m.v. + 5 digits)

### Electronic frequency measurement

Display range	Resolution	Accuracy
9.999 Hz	0.001 Hz	±(1.0% m.v. + 5 digits)
99.99 Hz	0.01 Hz	
999.9 Hz	0.1 Hz	
9.999 kHz	0.001 kHz	
99.99 kHz	0.01 kHz	

### Duty cycle measurement

Display range	Resolution	Accuracy
0.1...99.9%	0.1%	±(1.2% m.v. + 2 digits)

### Other technical specifications:

- » display ..... segment LCD, readout of 4000 readings, 4 digits, backlit
- » power supply ..... 2 x AAA 1.5 V battery  
..... or 2 x AAA NiMH 1.2 V rechargeable battery
- » indication of range overflow ..... "OL" symbol
- » continuity test ..... threshold 50 Ω, measuring current <0.5 mA
- » diode test ..... I=0.3 mA, U<sub>0</sub><3.3 V DC
- » sampling rate ..... 2 Hz
- » input impedance  
• V AC ..... >14 MΩ  
• V DC ..... ≥6 MΩ
- » auto-off timeout ..... 15 min
- » fuses ..... mA, μA range: 0.5 A/600 V fast-acting  
..... A range: 10 A/600 V fast-acting
- » operating temperature range ..... +5...+40°C at humidity <80%
- » storage temperature ..... -20...+60°C at humidity <80%
- » dimensions ..... 121 x 67 x 45 mm
- » weight ..... 204 g
- » measurement category ..... CAT III 600 V
- » compliance with standards ..... EN 61010-1  
..... EN 61010-2-031, EN 61010-2-033  
..... EN 61326-1, EN 61326-2-2



## SONEL CMM-10

index: WMGBCMM10



## Measurements

- » AC & DC voltage
- » AC & DC current
- » resistance
- » capacitance
- » temperature
- » duty cycle
- » frequency
- » diode and continuity test

## Additional functions

- » automatic and manual range selection
- » freezing the measurement result thanks to **HOLD** function
- » **REL** function enabling performance of relative measurement
- » **Auto-OFF** function
- » resistant to impacts strengthened housing, covered with elastomer

## Direct and alternating voltage measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.0 mV	0.1 mV	±(0.5% m.v. + 2 digits)	±(1.5% m.v. + 70 digits)
4.000 V	0.001 V		±(1.2% m.v. + 3 digits)
40.00 V	0.01 V	±(1.2% m.v. + 2 digits)	±(1.5% m.v. + 3 digits)
400.0 V	0.1 V		
600 V	1 V	±(1.5% m.v. + 2 digits)	±(2.0% m.v. + 4 digits)

- » input impedance: 7.8 MΩ
- » frequency range: 50...400 Hz

## Direct and alternating current measurement

Display range	Resolution	Accuracy (DC)	Accuracy (AC)
400.0 μA	0.1 μA	±(1.0% m.v. + 3 digits)	±(1.5% m.v. + 30 digits)
4000 μA	1 μA		
40.00 mA	0.01 mA	±(1.5% m.v. + 3 digits)	±(1.8% m.v. + 5 digits)
400.0 mA	0.1 mA		
4.000 A	0.001 A		
10.00 A	0.01 A	±(1.5% m.v. + 2 digits)	±(3.0% m.v. + 7 digits)

## Standard accessories:

Set of test leads for CMM/CMP	WAPRZCMP1
Temperature measurement probe (type K)	WASONTEMK
Type K temperature probe adapter	WAADATEMK
9 V battery	
Declaration of verification	

## Resistance measurement

Display range	Resolution	Accuracy
400.0 Ω	0.1 Ω	±(1.2% m.v. + 4 digits)
4.000 kΩ	0.001 kΩ	±(1.0% m.v. + 2 digits)
40.00 kΩ	0.01 kΩ	
400.0 kΩ	0.1 kΩ	±(1.2% m.v. + 2 digits)
4.000 MΩ	0.001 MΩ	
40.00 MΩ	0.01 MΩ	±(2.0% m.v. + 3 digits)

## Capacitance measurement

Display range	Resolution	Accuracy
40.00 nF	0.01 nF	±(5.0% m.v. + 7 digits)
400.0 nF	0.1 nF	
4.000 μF	0.001 μF	±(3.0% m.v. + 5 digits)
40.00 μF	0.01 μF	
100.0 μF	0.1 μF	±(5.0% m.v. + 5 digits)

## Electronic frequency measurement

Display range	Resolution	Accuracy
5.000 Hz	0.001 Hz	
50.00 Hz	0.01 Hz	±(1.5% m.v. + 5 digits)
500.0 Hz	0.1 Hz	
5.000 kHz	0.001 kHz	
50.00 kHz	0.01 kHz	±(1.2% m.v. + 3 digits)
500.0 kHz	0.1 kHz	
5.000 MHz	0.001 MHz	
10.00 MHz	0.01 MHz	±(1.5% m.v. + 4 digits)

- » sensitivity: minimum effective voltage value 8 V.

## Duty cycle measurement

Display range	Resolution	Accuracy
0.1...99.9%	0.1%	±(1.2% m.v. + 2 digits)

## Temperature measurement

Display range	Resolution	Accuracy
-20...760°C	1°C	±(3% m.v. + 5°C)
-4...1400°F	1°F	±(3% m.v. + 9°F)

## Other technical specifications:

- » display ..... segment LCD, readout of 5000 readings, 3 5/6 digits, backlit
- » power supply of the meter ..... 9 V battery, type 6LR61
- » indication of range overflow ..... "OL" symbol
- » continuity test ..... threshold 50 Ω, measuring current <0.3 mA
- » diode test ..... I=0.3 mA, U<sub>0</sub>=1.5 V DC
- » sampling rate ..... 2 Hz
- » input impedance
  - V AC ..... >8.5 MΩ
  - V DC ..... ≥8 MΩ
- » auto-off timeout ..... 30 min
- » fuses ..... mA, μA range: 0.5 A/1000 V fast-acting  
..... 10 A/1000 V fast-acting
- » operating temperature ..... 0...+50°C at humidity <70%
- » storage temperature ..... -20...+60°C at humidity <80%
- » dimensions ..... 138 x 68 x 37 mm
- » weight ..... 210 g
- » measurement category ..... CAT II 600 V
- » compliance with standards ..... EN 61010-1, EN 61010-2-032



## CMM

### Set of standard and optional accessories

1, 2, 4 - number of standard accessories  
• - optional accessories

Photo	Name	Index	CMM-60	CMM-40	CMM-30	CMM-11	CMM-10	Photo	Name	Index	CMM-60	CMM-40	CMM-30	CMM-11	CMM-10
	AHV-3 voltage adapter	WAADAAHV3	•						Temperature probe (type K, metal)	WASONTEMK2	1	•	•		•
	Test lead with probe for CMM/CMP (set)	WAPRZCMP1	•	•	•	•	1		Temperature probe (type K, bayonet)	WASONTEMP	•	•	•		•
	Test lead with probe for CMM/CMP (set)	WAPRZCMP2	•	•	•	•	•		M1 hanging hook straps	WAPOZUCH1	•				
	Test leads set for CMM (CAT IV, S)	WAPRZCMM1	•	•	•	1	•		Magnetic hanging strap	WAPOZUCH6	•		•		
	Test leads set for CMM (CAT IV, M)	WAPRZCMM2	1	1	1	•	•		Battery charger	WAZASZ21	1				
	Test lead for CMM/CMP (set)	WAPRZCMX1	•	•	•	•	•		Charging adapter	WAADALAD1	1				
	Test lead 2,0 m black CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BLBBF10	•	•	•	•	•		CMM-RR radio receiver	WAADACMMRR	1				
	Test lead 2,0 m blue CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002BUBBF10	•	•	•	•	•		Li-Pol battery 7.4 V, 2400 mAh	WAAKU25	1				
	Test lead 2,0 m green CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002GRBBF10	•	•	•	•	•		M13 carrying case	WAFUTM13	•	•			
	Test lead 2,0 m red CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002REBBF10	•	•	•	•	•		S1 carrying case	WAFUTS1			•	•	•
	Test lead 2,0 m yellow CAT IV 1000 V (banana plugs with 10 A fuse)	WAPRZ002YEBBF10	•	•	•	•	•								
	Crocodile clip mini, 1 kV 10 A (set)	WAKROKPL10MINI	•	•	•	•	•								
	Type K temperature probe adapter	WAADATEMK	1	1	1		1								
	Temperature probe (type K)	WASONTEMK	•	1	1		1								

## Two-pole voltage testers

# SONEL P-6 / P-5 / P-4

index: WMGBP6 / WMGBP5 / WMGBP4

**CAT III**

**1000 V**

**CAT IV**

**600 V**

**IP65**



## Product description

Sonel P-6, P-5 and P-4 are reliable, particularly durable and safe 2-pole testers, which enable testing voltage, circuit continuity and phase sequence. They have been designed for use in extreme conditions both in industry and commercial applications. Advanced technology, a high level of safety and user-friendliness are the key features of the P-line voltage testers.

## Main functions and attributes of the P-line instruments

- » **P-6** | phase identification - unique feature in voltage indicators worldwide
- » automatic voltage test up to 1000 V AC/DC
- » optical indication by a LED bar
- » **P-6 • P-5** | optical indication by an additional LCD display
- » sound indication when dangerous voltage levels of 50 V AC and 120 V DC are exceeded
- » RCD trip test with switchable load
- » automatic continuity test upon connection to the object
- » 2-pole test of phase rotation direction
- » single-pole indication of 100 V presence
- » **P-6 • P-5** | resistance measurement up to 1999 Ω
- » **P-6 • P-5** | **HOLD** function for freezing the measurement results
- » robust, two-component housing protecting from mechanical damages and impacts
- » integrated torch light
- » **P-6 • P-5** | backlit display for tests in poorly lit areas
- » **IP65** ingress protection guarantees protection against dust and water
- » safety provided by measuring class compliant with **CAT IV 600 V** and **CAT III 1000 V** standards

## Technical specifications:

- » measurement category acc. to EN 61010-1 ..... III 1000 V / IV 600 V
- » protection class acc. to EN 60529 ..... IP65
- » insulation type acc. to EN 61010-1 ..... double-insulation, class II
- » instrument power supply ..... 2 x LR03 AAA 1.5 V (recommended alkaline cells)
- » operating frequency range ..... 16...400 Hz
- » continuity test: light and sound ..... signal for R ≤ 400 kΩ
- » **P-6 • P-5** | range of resistance measurement ..... 1...1999 Ω
- » input impedance ..... approx. 300 kΩ
- » range for single-pole phase indicator ..... 100...1000 V
- » minimum activation voltage ..... ±6 V AC/DC
- » operating / storage temperature ..... -15...+55°C / -20...+70°C
- » auto-off time ..... 10 s / 30 s (HOLD mode)
- » display ..... LCD, 3½ digits, 1999 read-out with function indicators
- » dimensions ..... 275 x 82 x 36 mm
- » weight incl. batteries / excl. batteries ..... 291 g / 267 g
- » electromagnetic compatibility in accordance with standards ..... EN 61326-1, EN 61326-2-2
- » conformance with the requirements of standards ..... EN 61010-1, EN 61243-3

## Standard accessories:

Φ4 mm screw tip (set of 4 pcs.)	WAPOZN4MMK
4 mm applied tip (set of 2 pcs.)	WAPOZO4MMK
2x AAA / LR03 alkaline battery	
Declaration of verification	

## Optional accessories:

S2 case	WAFUTS2
---------	---------



## Residual-current device trip testing

In response to the needs of clients, our new P-line voltage testers allow to check the RCD in a fully controllable way. With buttons on both probes, the user can reduce the internal impedance of the instrument, which makes it possible to trip the RCD. Additionally, pressing both buttons activates an additional loadpoint - a vibration motor. In this way, voltage can be measured in a tested circuit with no impact of stray currents on the result.



## Durability and comfort of use

The housing has been designed for use in harsh industrial environments, where the application of personal protection equipment, such as voltage insulation safety gloves, is required. At the same time, the instrument's ergonomic shape allows for one hand use.



## Versatility and safety

Voltage testers are provided with a set of test probes. The probes reduce metal exposure to 4 mm length, which eliminates the risk of accidental contact with the wrong conductor when performing measurements on a wire harness. Additional screw-on metal adapters are used for applications where tips with 4 mm diameter are required. It is particularly important for tests in electrical sockets, where the user must be sure that contact between the probe and the conductor is kept. All elements of the set are stored in a special case so the probe tips can be replaced when needed. The case also includes an adapter that is helpful for unlocking the UK-type sockets.

Parameter	P-6	P-5	P-4
measurement category	CAT III 1000 V / IV 600 V		
range of voltage	6.0 ... 1000 V AC/DC		12 ... ≥690 V AC/DC
LED bar	7 segments		
backlit LCD display	✓	✓	-
continuity test	✓	✓	✓
10 mA / 30 mA RCD trip test	✓	✓	✓
built-in torch light	✓	✓	✓
single-pole phase tester	✓	✓	✓
2-pole phase rotation tester	✓	✓	✓
IP65 protection class	✓	✓	✓
resistance test	✓	✓	-
freeze display	✓	✓	-
phase identification	✓	-	-



## Distance meter

# SONEL LMW-100

index: WMGBLMW100



## Description

The LMW-100 is an invaluable measurement assistant for users working in the construction industry, but also for electricians. It will help you to determine:

- » the measurement grid for illuminance measurements,
- » the distance to the probes when measuring earth resistance,
- » the distance to cable damage indicated by the reflectometer.

The 100-meter range facilitates the work in many industry branches. Functions for calculating the area, volume and height, help the user to accelerate the execution of tasks.

## Features

### Advanced

The rangefinder has a range of up to **100 m**. With the built-in algorithms, the device helps the user by calculating the **area**, **cubature** and - on the basis of 2 or 3 indirect measurements - **height**.

### Handy

A pocket device with a handy shape.

### Durable

This compact device is equipped with the latest technologies to operate in challenging conditions. The rubberised housing protects the device against damage.

## Measurement functions

- » Single mode measurements
- » Continuous measurements
- » Automatic continuous determination of extreme values
- » Summing up the results
- » Surface measurement
- » Volume measurement
- » Determining the distance with 2 measurements
- » Determining the distance with 3 measurements

## Standard accessories:

Screwdriver	WAPOZSRU1
S6 carrying case	WAFUTS6
2x AAA 1,5 V battery	
Declaration of verification	

## Optional accessories:

S1 carrying case	WAFUTS1
------------------	---------



## Technical specifications:

» degree of housing protection acc. to EN 60529	IP54
» range	0.05...100 m
» measurement accuracy at a distance of $\leq 10$ m	from $\pm 1.5$ mm
» unit of measurement	meters / inches / feet
» memory of measurement results	20 records
» operating temperature	-10...50°C
» storage temperature	-20...60°C
» operating humidity	<95%
» storage humidity	30...50%
» power supply	2x AAA 1.5 V battery
» inactivity time for triggering Auto-Off function	
laser	0.5 min
device	3 min
» weight	100 g
» dimensions	110 x 46 x 28 mm

## Non-contact AC voltage detector

# SONEL VT-3

index: WMGBVT3



- » signaling: light and sound
- » voltage range: 12~1000 V AC (50/60 Hz)
- » measurement category: IV 1000 V
- » power supply: 2x 1.5 V (LR03) battery




## Non-contact AC voltage detector

# SONEL VT-2

index: WMGBVT2



- » signaling: light and sound
- » voltage range: 90~1000 V AC (50/60 Hz)
- » measurement category: III 1000 V
- » power supply: 2x 1.5 V (LR03) battery

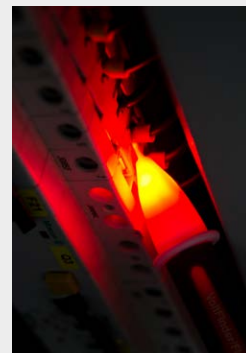

# SONEL TKF-13 / TKF-12 / TKF-12L

index: WMGBTKF13 / WMGBTKF12 / WMGBTKF12L

## TKF-13



## TKF-12



## TKF-12L



CAT III

600 V

CAT IV

300 V

IP42

### Features

- » indication of phase sequence in networks with voltage 35...690 V AC
- » operation in networks with 2...70 Hz frequency
- » voltage indication light
- » wired and wireless indication of motor rotation
- » magnetic field detection

### Purpose

The unique TKF-12, TKF-12L and TKF-13 testers are designed to control 3-phase electrical installations in a wide range of phase-to-phase voltages (35... 690 V, frequency up to 70 Hz) in distribution circuits. The indication of the rotating field and the direction of motor shaft rotation is performed, among others, with a non-contact method.

### Application

#### Versality

Measure easily and accurately 16-, 32- and 63-amps industrial sockets with optional AGT-16, AGT-32 and AGT-63 adapters.

#### Prevention

Standard accessories, included in the kits, allow for quick verification whether the shaft rotates in the correct direction after the motor is connected. Otherwise, the engine or the equipment driven by it may be damaged.

#### Non-contact check of motor shaft rotation direction

Non-contact verification of motor shaft rotation direction is possible only in the TKF-13, which includes a function dedicated to this type of measurement.

#### Intuitive, trouble-free connection

Various colored cables, crocodile clips and test probes allow you to connect the device to the tested object - quickly and without any problems.

#### Sensitive indication

Thanks to the innovative technology in the TKF-12L, we have achieved a record range of nominal phase-to-phase voltages: indication of voltage presence is displayed from 29 V AC.

### Standard accessories:

Crocodile clip, black, 1 kV, 20 A	WAKROBL20K01
Test lead 1.2 m, black, 1 kV (banana plugs)	WAPRZ1X2BLBB
Test lead 1.2 m, red, 1 kV (banana plugs)	WAPRZ1X2REBB
Test lead 1.2 m, yellow, 1 kV (banana plugs)	WAPRZ1X2YEBB
Pin probe, black 1 kV (banana socket)	WASONBLOGB1
Pin probe, red 1 kV (banana socket)	WASONREOGB1
Pin probe, yellow 1 kV (banana socket)	WASONYEOGB1

Declaration of verification

### Optional accessories:

AGT-16C three-phase socket adapter 16 A (PEN)	WAADAAGT16C
AGT-16P three-phase socket adapter 16 A	WAADAAGT16P
AGT-32C three-phase socket adapter 32 A (PEN)	WAADAAGT32C
AGT-32P three-phase socket adapter 32 A	WAADAAGT32P
AGT-63P three-phase socket adapter 63 A	WAADAAGT63P
Test lead 2,0 m black CAT IV 1000 V (banana plugs, fused 10 A)	WAPRZ002BLBBF10
Test lead 2,0 m blue CAT IV 1000 V (banana plugs, fused 10 A)	WAPRZ002BUBBF10
Test lead 2,0 m green CAT IV 1000 V (banana plugs, fused 10 A)	WAPRZ002GRBBF10
Test lead 2,0 m red CAT IV 1000 V (banana plugs, fused 10 A)	WAPRZ002REBBF10
Test lead 2,0 m yellow CAT IV 1000 V (banana plugs, fused 10 A)	WAPRZ002YEBBF10
S3 carrying case	WAFUTS3
Crocodile clip, red, 1 kV, 20 A	WAKRORE20K02
Crocodile clip, yellow, 1 kV, 20 A	WAKROYE20K02

Parameter	TKF-13 Professional model with motor testing	TKF-12 Basic model for rotation field measurement	TKF-12L Basic model for rotation field measurement
Basic technical data			
nominal phase-to-phase voltage range	120...690 V AC	160...690 V AC	35...690 V AC
maximum phase-to-phase operating voltage	760 V AC		
range of motor electromotive force voltages	1...760 V AC	—	
frequency range	2...70 Hz	10...70 Hz	
Other data			
work temperature	-10...+45°C		
storage temperature	-20...+60°C		
work humidity	20...80%		
power supply	6LR61 alkaline battery (9 V)	from the tested network up to 15 min for maximum voltage	
battery status LED blinking period	ca. 1 s	—	
automatic shutdown time	ca. 5 min	—	
dimensions (with holster and without test leads)	130 x 72 x 31 mm		
weight without test leads	ca. 150 g	ca. 200 g	
measurement category in accordance with EN 61010 and EN 61557	CAT III 600 V		
insulation type	double in accordance with EN 61010-1		





**Battery testing**  
BT-120



**Ultrasonic detection**  
KUS-100



**Leakage current detection**  
MPU-1



**Demonstration boards**  
DB-1  
DB-THERMO





## Battery tester

# SONEL BT-120

index: WMGBBT120



## Features

Sonel BT-120 tester is a measuring tool that allows you to accurately test a wide range of battery parameters to ensure optimal battery performance. Designed for both professionals and home users, BT-120 tester is a vital support for keeping batteries in excellent condition.

Sonel BT-120 tester is a reliable tool that provides accurate measurements and precise information about the condition of the battery. It allows to:

- » monitor the performance of batteries and avoid unpleasant surprises related to their improper operation,
- » make informed decisions about the continued use of batteries or their replacement, based on internal impedance measurements,
- » ensure reliable power supply in a wide range of applications, from vehicles to emergency power systems,
- » identify potential problems, such as improper charging or cell damage, by measuring the ripple voltage.

With Sonel BT-120 tester, you can rest assured that your batteries are operating at full capacity, delivering power when you need it. Find optimal power solutions for your devices with a tester that offers reliable measurements and precise information.

## AC/DC current measurements

The tester can accurately measure AC and DC current up to 400 A. This is crucial to assess the battery's ability to deliver power and identify any problems with current flow.

## AC/DC voltage measurements

BT-120 allows you to measure both AC and DC voltage, up to 500 V. This is important for monitoring voltage stability and matching battery voltage to the requirements of powered devices.

## Internal impedance measurement

Internal impedance is an indicator of the battery's condition. The tester allows you to measure this value, which allows you to assess the condition of the battery and make informed decisions about its further use.

## Ripple voltage measurement

Measuring the ripple voltage down to 5 V identifies potential problems, such as cell damage or improper charging. This is crucial to maintaining battery performance.

## Industry versatility

BT-120 is used in a wide range of industries, from automotive and electrical to renewable energy and telecommunications. It's a tool for professionals concerned about power reliability and efficiency.

## Standard accessories:

Set of cables for measuring internal impedance	WAPRZBT120ZS
Set of cables for voltage measurement	WAPRZBT120U
Adapter for data transmission (USB)	WAADABTUSB1
C-130BE measuring clamp	WACEGC130BE
L-17 carrying case	WAFUTL17
Z-34 power supply	WAZASZ34
Calibration resistor	WAADARK1
Declaration of verification	

## Optional accessories:

C-135BE measuring clamp	WACEGC135BE
Sonel Reader software	WAPROREADER

## Internal resistance

Display range	Resolution	Accuracy
3 mΩ	1 μΩ	±(0.8% m.v. + 10 digits)
30 mΩ	10 μΩ	
300 mΩ	100 μΩ	
3 Ω	1 mΩ	±(0.5% m.v. + 10 digits)
30 Ω	10 mΩ	
300 Ω	100 mΩ	

## DC voltage

Display range	Resolution	Accuracy
5 V	0.001 V	±(0.5% m.v. + 5 digits)
50 V	0.01 V	
500 V	0.1 V	

## AC voltage

Display range	Resolution	Accuracy
500 V (50/60 Hz)	0.1 V	±(0.75% m.v. + 5 digits)

» frequency range: 40 Hz...100 Hz

## DC current

Display range	Resolution	Accuracy
4 A	0.001 A	±(0.5% m.v. + 5 digits)
40 A	0.01 A	
400 A	0.1 A	

## AC current

Display range	Resolution	Accuracy
4 A	0.001 A	±(0.75% m.v. + 10 digits)
40 A	0.01 A	
400 A	0.1 A	

## Temperature

Display range	Resolution	Accuracy
-10°C...100°C	0.1°C	±(1% m.v. + 2 digits)

## Ripple voltage

Display range	Resolution	Accuracy
0 V...5 V	0.001 V	±(2.5% m.v. + 10 digits)

» frequency range: 40 Hz...10 kHz

## Technical data:

- » insulation type acc. to EN 61010-1 and EN IEC 61557 ..... double
- » measurement category acc. to EN IEC 61010-2-030 ..... CAT III 500 V
- » protection class acc. to EN 60529 ..... IP54
- » power supply
  - mains ..... AC 100 V...240 V, 50 Hz / 60 Hz
  - rechargeable battery ..... Li-Ion >5.4 Ah
- » dimensions ..... 232 x 192 x 111 mm
- » weight ..... 1.4 kg
- » operating temperature ..... 0...+50°C
- » storage temperature ..... -20...+50°C
- » relative humidity ..... 10...85%
- » display ..... graphical LCD
- » altitude a.s.l. .... <2000 m
- » quality standard ..... development, design and production acc. to ISO 9001
- » the product meets the EMC requirements according to standards ..... EN 61326-1  
..... EN 61326-2-2

Acoustic imager

## SONEL KUS-100

index: WMGBKUS100



Acoustic parameters	
Number of microphones	64
Bandwidth	2 kHz...100 kHz
Distance	0.3 m...100 m
Camera FOV	51.8° x 36.4°
Sound intensity display	Peak Point, Center Point
Acoustic image frame rate	25 fps
Signal noise ratio	70 dB
Acoustic image resolution	800 x 480
Acoustic image palettes	8
Leak rate	>0.008 l/min @ 6 bar from 0.5 m >0.013 l/min @ 5 bar from 1 m
Image display	
Display	800 x 480 px, 4.3" LCD, touchscreen
Digital zoom	1.0x...8.0x
Screen brightness	Manual / Auto
Memory	
Storage media	Removable 64 GB SD card
Image storage capacity	20 000 images
Video storage capacity	60 hours
Video file format	MP4
Annotations	Voice note: max. 60 seconds Text note: max. 200 characters
Power supply system	
Power supply	5 V DC/ 2 A (charging via USB)
Battery type	Dismountable and rechargeable Li-Ion battery
Battery operating time	Approx. 3.5 hours
Battery charging time	5 hours to full charge
Communication	
Wi-Fi	802.11 b/g/n (2.4 GHz and 5 GHz)
USB interface	USB Type-C
HDMI interface	HDMI-D
Environmental conditions	
Protection level	IP40
Operating temperature	-20°C...50°C
Storage temperature	-20°C...60°C
Relative humidity	<95% without condensation
Drop test height	1.2 m
Safety	IEC 61010-1
EMC	EN 55032, EN 50130-4, EN IEC 61000-3-2, EN 61000-3-3
Weight	Approx. 940 g
Dimensions	292 x 127 x 111 mm
Tripod mounting	UNC ¼"-20

### Standard accessories:

Microphone cover	WAPOZOSL6
3x Li-Ion battery 3.6 V 6.23 Ah	WAAKU32
Z-35 power supply	WAZASZ35
Z-36 external battery charger	WAZASZ36
Wristband	WAPOZPAS7
XL-15 hard carrying case	WAWALXL15
USB cable type C	WAPRZUSBC
HDMI micro cable	WAPRZMIKROHDMI
Factory calibration certificate	

### Features


Sonel KUS-100 acoustic imager, with the help of a **built-in microphone array**, effectively detects sources of acoustic emission such as leaks of compressed agents in industrial installations or partial discharges in the power utility industry. It is a vital diagnostic tool, allowing significant savings by reducing energy losses.

The imager operates in two detection modes: leakage and partial discharge. It has the ability to manually tune the detected frequencies and change the sensitivity level to avoid unwanted reflections and interference. Comfort of use is improved by a touch screen and a convenient strap mounted to the housing.



## SONEL MPU-1

index: WMGBMPU1

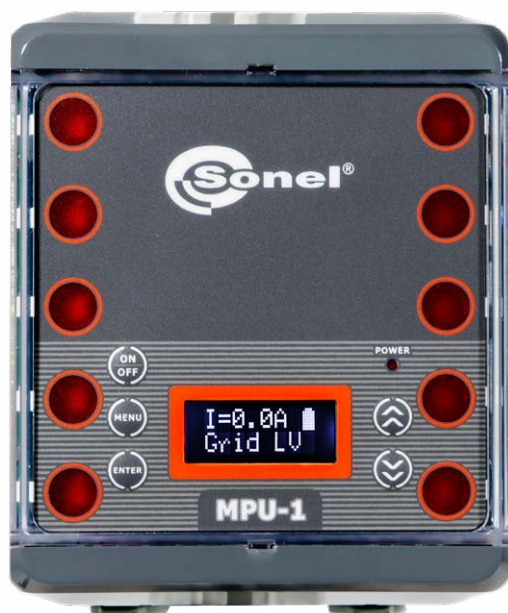

 IP67

### Features:

MPU-1 is intended for monitoring (measurement) of leakage current in power networks of alternating current, low and medium voltage, and serves for performing measurements whose results determine the safety status of the monitored system from the perspective of flowing leakage current. The instrument enables setting of the safe threshold value of flowing leakage current, above which a visual and sound alarm is activated.

### The most important features of the MPU-1 instrument include:

- » continuous monitoring of alternating current flowing through earthing,
- » measurement on one or two clamps simultaneously, in the case of measurement using two clamps, the current value is summed, and this provides the capability of measuring spun poles with independent clamps for each component pole,
- » diode indicator of operating mode,
- » alarm in the event of flow of current higher than the alarm threshold (factory setting 1 A), sound and visual alarm (speaker built into the housing),
- » measurement with flexible Sonel F-series coil (Rogowski coil) with a max. length of 2 m,
- » measurements in low- and medium-voltage networks with frequency of 50 Hz or 60 Hz,
- » automatic selection of measuring range,
- » monitoring of battery level,
- » ergonomic operation.


### Measurement of leakage currents flowing through clamp:

Display range	Resolution	Accuracy
0.1...9.9 A	0.1 A	±(5% m.v. + 2 digits)
10...299 A	1 A	

- » frequency range: 50 Hz or 60 Hz
- » flexible current coil – F-1A



Operation in medium-voltage mode - the display reads the value of the set alarm threshold and indicates the battery charge status



Operation in low-voltage mode - the display reads the value of the measured current flowing through the clamp and indicates the battery charge state

### Standard accessories:

Straps for mounting on the pole for PQM (set)	WAP0ZOPAKPL
230 V mains cable (IEC C7 plug)	WAPRZLAD230
L5 carrying case for MPU-1	WAWALL5
Power supply adaptor Z11	WAZASZ11
Factory calibration certificate	

### Optional accessories:

F-1A flexible coil (Ø360 mm)	WACEGF1AOKR
F-2A flexible coil (Ø235 mm)	WACEGF2AOKR
F-3A flexible coil (Ø120 mm)	WACEGF3AOKR
F-4 flexible coil (Ø630 mm)	WACEGF4OKR
Cable for battery charging from car cigarette lighter socket (12 V)	WAPRZLAD12V2



The standard kit includes a transport briefcase for the signaler, standard and additional accessories

### Technical data:

- » housing protection rating according to EN 60529 ..... IP67
- » instrument power supply .... NiMH 9.4 V 2.1 Ah rechargeable battery pack
- » parameters of battery charger power adapter ..... 100...240 V
- ..... 50...60 Hz
- » operating time for standby mode ..... >18 h
- » operating time for alarm mode ..... 3 h
- » alarm threshold setting range ..... 0.5 ... 9.9 A
- » dimensions ..... 125 x 150 x 95 mm
- » weight of instrument with rechargeable batteries ..... approx. 1.1 kg
- » operating temperature range ..... -10...+50°C
- » charger operating temperature range ..... +10...+35°C
- » reference temperature ..... 23 ± 2°C
- » storage temperature ..... -20...+80°C
- » relative humidity ..... 20...90%
- » nominal relative humidity ..... 40...60%
- » elevation above sea level ..... <2000 m
- » quality standard ..... development, design and production in compliance with ISO 9001
- » this product meets EMC requirements in compliance with standards ..... EN 613261 and EN 61326-2-2





## Demonstration board

# SONEL DB-1

index: WMGBDB1



## Features

The DB-1 board makes it possible to demonstrate the method of performing the following tests:

- » fault loop impedance for assessment of the automatic power cutoff condition,
- » RCD parameters,
- » earthing resistance,
- » soil resistivity,
- » continuity test of equipotential bonding,
- » insulation resistance,
- » power network voltage.

It is possible to simulate typical failures and irregularities in the electrical network.


## Measurements

Technical specifications of DB-1 board and features of individual functions:

- » Fault loop impedance:
  - measurement of L-N short-circuit with impulse currents up to 25 A and 60 ms,
  - measurement of L-PE earth fault loop with impulse currents up to 20 mA.
- » RCD parameters (30 mA RCD):
  - measurement of RCD trip time,
  - measurement of RCD trip current,
  - earth resistance measurement,
  - touch voltage measurement.
- » Soil resistivity:
  - resistivity measurement for three soil types (31  $\Omega$ m, 295  $\Omega$ m, 5.9 k $\Omega$ m).
- » Earthing resistance.
  - Measurement by:
    - 2-pole method,
    - 3-pole method,
    - 4-wire method,
    - 3-pole method with clamp,
    - two-clamp method,
    - with the use of fault loop meter.
- » Continuity of connections:
  - measurement of equipotential bonding and connections of accessible parts.
- » Insulation resistance:
  - measurement of L-N insulation,
  - measurement of L-PE insulation,
  - measurement of N-PE insulation.
- » Voltage measurement:
  - voltage measurement in power socket.
- » Simulation of irregularities:
  - no continuity of earth conductor ( $R_E$ ),
  - safe voltage exceeded during RCD measurement ( $U_B$ ),
  - permissible RCD tripping current ( $I_A$ ) exceeded,
  - permissible RCD tripping time ( $t_A$ ) exceeded,
  - insufficient L-N insulation resistance ( $R_{iso}(L-N)$ ),
  - insufficient L-PE insulation resistance ( $R_{iso}(L-PE)$ ),
  - excessive fault loop impedance ( $Z_L$ ).
- » 230 V network socket.

## Standard accessories:

Test lead 0.7 m, black (banana plugs)	WAPRZOX7BLBB
Mains cable with IEC C13 plug	WAPRZ1X8BLIEC
4x configuration jumper	WAPOZZW1
Declaration of verification	

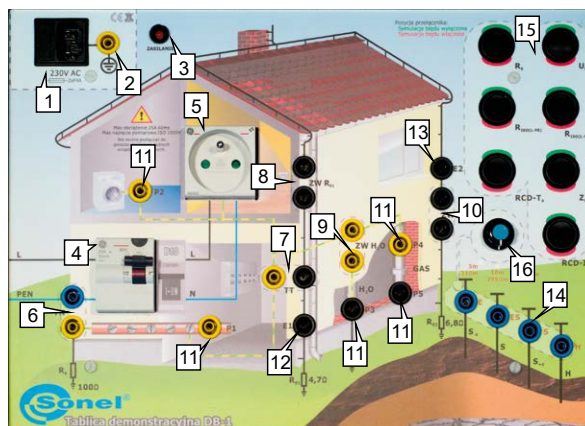

- 1 Power socket 230 V
- 2 Additional PE socket
- 3 230 V power indicator lamp
- 4 Residual current device (RCD)
- 5 Measurement socket
- 6 TN network clamp
- 7 TT network clamp
- 8 Socket of earth electrode  $R_{E1}$  (ZW  $R_{E1}$ )
- 9 Socket of equipotential bonding of  $H_2O$  pipe (ZW  $H_2O$ )
- 10 Socket of earth electrode  $R_{E2}$  (ZW  $R_{E2}$ )
- 11 Measurement points P1, P2, P3, P4, P5
- 12 Measurement point of earth electrode  $R_{E1}$  (E1)
- 13 Measurement point of earth electrode  $R_{E2}$  (E2)
- 14 Measuring electrode sockets
- 15 Irregularity selection switches
- 16 Soil type switch for soil resistivity measurements

## Basic technical data:

» RCD type	30 mA type AC
» power supply from network	230 V
» power consumption	approx. 15 mW
» protection	2 x T3 14A 250 V or 2 x F 4 A 250 V

## Safety and work conditions:

» measuring category according to EN 61010	II 300 V
» ingress protection	IP40
» type of insulation according to EN 61010-1 and IEC 61557	single
» operating temperature	10...+40°C
» storage temperature	-20...+60°C
» humidity	20...80%
» dimensions	405 x 300 x 140 mm
» weight	ca. 3.6 kg

## Other information

- » Quality standard – development, design and production ..... ISO 9001



The DB-1 demonstration board makes it possible to simulate various faults and irregularities in an electrical network.

Demonstration board

SONEL DB-THERMO

index: WMGBDBTHERMO



Standard accessories:

Heating panel protective plate	WAPOZOSL3
Power supply 24 V DC / 4 A	WAZASZ31

The DB-THERMO board is an indispensable device during any training on contactless temperature measurements and thermal imaging with the use of thermographic cameras. DB-THERMO helps to understand the phenomena related to the emissivity of different materials and the influence of surface type on temperature measurement.

The DB-THERMO set includes instructions describing all topics concerning thermal imaging.

The device is enclosed in a solid briefcase housing with a detachable cover.

DB-THERMO has a heating panel with an emissivity of 0.98 as well as plates made of various typical materials, with matte and polished surfaces. A programmable controller keeps watch over the temperature of the heating panel. The user may select a temperature from within the range of 40...60°C. The LED display reads the current panel temperature.

Emissivity of main plate (110 x 110 mm)

Material	Polished	Matte
Blackened aluminium	-	0.98

Emissivity of materials (70 x 30 mm plates):

Material	Polished	Matte
Copper	0.03	0.20
Aluminium	0.10	0.30
Brass	0.04	0.33
Polycarbonate	0.88	0.91
Glass	0.84	0.90
Stainless steel	0.12	0.39



The DB-THERMO demonstration board has a built-in programmable controller that stands vigil over the temperature of the heating panel.

Basic technical data:

- » plate temperature regulation range ..... 40°C...60°C
- » plate temperature reading accuracy ..... ±2%
- » resolution of temperature readings ..... 0.1°C
- » resolution of temperature settings ..... 1°C
- » hysteresis ..... ±1.5°C
- » temperature stabilization time ..... <5 min
- » heating panel dimensions ..... 275 x 110 mm
- » display ..... LED
- » power supply ..... 24 V DC
- » power consumption ..... max. 100 W
- » thermal protection ..... 85°C

Safety and work conditions:

- » ingress protection ..... IP20
- » type of insulation according to EN 61010-1 ..... CAT II 300 V
- » operating temperature ..... 10...+40°C
- » storage temperature ..... -20...+70°C
- » dimensions ..... 330 x 260 x 140 mm
- » weight of device ..... ca. 0.5 kg

Other information

- » quality standard – development, design and production ..... ISO 9001





Screwdriver set, 6-pieces + voltage tester

## SONEL NZ-2 / NZ-1

index: WN22 / WN21



NZ-1



NZ-2

### Features

Sonel screwdriver has a rugged shaft and handle connection. Ergonomically designed handle means powerful fatigue-free use and optimum torque transfer. Specially selected materials ensure excellent shock resistance of the handle. High-precision tips compatible with DIN EN ISO guarantee perfect screw fit.

The set consists of:

- » 4x Flat-Head 223-1:
  - 0,4x2,5x75
  - 0,8x4,0x100
  - 1,0x5,5x125
  - 1,2x6,5x150
- » 2x Phillips-Head 224-1:
  - PH 1x80
  - PH 2x100
- » Voltage tester 120-250 V~



### NZ-1 | Optional accessories:

S-9 carrying case

WAFUTS9

### NZ-2 | Standard accessories:

S-9 carrying case

WAFUTS9






# SMT AND THT ASSEMBLY

Our meters are manufactured based on the latest SMT and THT electronics assembly technologies. Besides manufacturing measuring instruments, we also render comprehensive surface mounting and through-hole assembly.

## Designing

The creation of a new product depends on the designing process. For this purpose, we have picked a specialized team of designers, who will create the perfect solution for you needs through their determination and enormous potential.

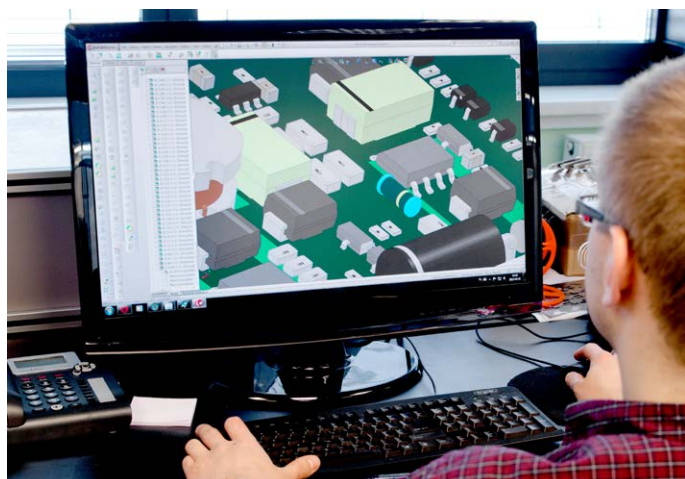

## Tester construction

In order to dispel all doubts as to the proper functioning of our electronic systems, they undergo tests individually designed by us.

## Production

We understand production to be the process of product creation. In our book, production means quality, precision, time, and above all, a perfectly filled order, in which we apply modern technology combined with a vast pool of knowledge.



## Production lines

### SMT

- » SPI automatic solder paste printing control system - 2 machines
- » EKRA SERIO stencil printer- 2 machines
- » FUJI NXT automatic machine
- » FUJI AIMEX 3C automatic machine
- » Ersa HOTFLOW 2/20 reflow soldering furnace
- » Ersa HOTFLOW THREE 6/20 reflow soldering furnace
- » X-RAY device for counting of SMD/THT components

### THT

- » Ersa-WAVE 330 wave soldering system (soldering in nitrogen atmosphere)
- » 85 stations of manual and supplementary assembly

### Inspection and testing

- » AOI 3D (Automatic Optical Inspection 3D) Parmi X-ceed
- » Electrical and functional testing of printed circuits
- » Construction of dedicated testers

### Protective coatings

Programmable selective casting (capability of selecting any area on a circuit board's surface) with lacquer or resin protective coating is performed automatically. Because of this, we achieve better productivity and save valuable time in the entire production process.

### Additional equipment

- » PCB cleaning machine
- » Climate chamber



## Repair and maintenance

We offer assembly and disassembly, repair and maintenance of elements as an additional service.

## Quality and environment

We perform every order with the appropriate accuracy in the proper environment (ionic cleanliness tests), and thus, we ensure that your product is of the highest quality.



# LABORATORY

## What do we do?

The Testing and Calibration Laboratory of SONEL S.A. offers calibration services for measuring instruments of both electrical and non-electrical values. Apart from standard calibration procedures, the laboratory is distinguished by the knowledge of Sonel products products in the scope of construction, time drift, etc. It enables the development of an optimal process of metrological verification, allowing to check the instrument in the wider possible range of its functionality and in the typical points for a given measurement.

To provide a high quality of services, we have implemented a management system compliant with the requirements of EN ISO/IEC 17025 standard "General requirements for the competence of testing and calibration laboratories." We confirmed compliance with all the requirements of the standard by obtaining the Accreditation Certificate of Calibration Laboratory No. AP 173 issued by the Polish Centre for Accreditation in 2017. In the following years, we successively extended the scope of our accreditation to other areas. In terms of the number of performed calibration procedures, we are one of the largest laboratories of its kind in Poland. Over 25 years of experience and development allowed us to introduce to our offer services unique on the market. As one of the few laboratories, we can calibrate multifunction meters in a full range of functionality with accreditation.

We are distinguished by the implementation of calibration of measuring instruments in the scope of accreditation of:

- » impedance and short-circuit loop resistance meters from the value of 100 mΩ (including high-current fault loop impedance meters). As one of a few companies, we have a **test power network with a dedicated transformer**. Measurements are performed the power network, which allows omitting imperfections and limitations of methods based on simulations.
- » insulation resistance meters and standards in the range up to 15 kV and 20 TΩ and standards up to 40 TΩ at voltage up to 1 kV. This service is unique in the world.
- » small resistance meters for measuring currents from fractions of mA to several hundred amperes.

Our Laboratory forms a team of qualified specialists, for whom the quality of provided services is of the highest value.

USE OUR KNOWLEDGE AND EXPERIENCE!

## Our offer

We calibrate devices:

- » for measuring electrical values and parameters of power networks
  - **meters:** voltage, current, residual current protection, insulation resistance, earth resistance, short circuit loop impedance measurement, resistance, network parameters, multimeters
- » electrical standards
  - calibrators, resistance standards
- » for measurements of non-electrical values
  - pyrometers, lux meters, thermal imaging cameras

## When to calibrate?

SONEL S.A. recommends performing calibrations at least every 12 months for its instruments.

## Why regular calibration?

For brand new instruments put into service, the next performance confirmation is recommended to be carried out within 12 months from the date of entry into service (date of purchase), but no later than 24 months from the date of the first check. The next inspection is carried out by the Testing and Calibration Laboratory of Sonel S.A., and the issued document is called Calibration Certificate (instruments having the character of a standard) or Declaration of Verification (indicators, testers without the character of a standard).

The meters are calibrated at SONEL S.A. headquarters, at str. Wokulskiego 11, 58-100 Świdnica, Poland.

**Only an actual calibration certificate certifies the metrological properties of a calibrated measuring meter!!**

In the case of meters used for testing relating to protection against electric shock, the person carrying out the measurements shall have all confidence in the performance of the device used. Measurements made with an inoperative meter may contribute to an incorrect assessment of the effectiveness of protection health and even human life.

### CALIBRATION CERTIFICATES with PCA accreditation are recognized worldwide

This document defines the relationship between a standard and an indication of a meter and states the uncertainty of measurement.

The competence of the Testing and Calibration Laboratory of SONEL S. A. has been confirmed by an independent third party. Calibrations are performed according to standard procedures or based on individual customer requirements. The laboratory shall use methods of direct or indirect comparison to a standard, which are described in internal instructions.

WE ARE ACCREDITED BY THE POLISH CENTRE FOR ACCREDITATION



AP 173







Lined writing area for notes.



## **SONEL S.A.**

Wokulskiego 11  
58-100 Świdnica  
Poland

## **Customer Service**

+48 74 884 10 53  
customerservice@sonel.com

**[www.sonel.com](http://www.sonel.com)**

© Copyright SONEL S.A. 2025. All rights reserved.  
SONEL S.A. reserves the right to introduce changes  
to the described products without prior notification.  
The present catalogue does not constitute  
a commercial offer under the Civil Code, and is published  
with no legal responsibility and for informational purpose only.

Your distributor: